



1N4001GP THRU 1N4007GP

1.0 AMP. Glass Passivated Junction Plastic Rectifiers



Voltage Range
50 to 1000 Volts
Current
1.0 Ampere


Features

- ✦ High temperature metallurgically bonded construction
- ✦ Plastic material used carries Underwriters Laboratory Classification 94V-0
- ✦ Glass passivated cavity-free junction
- ✦ Capable of meeting environmental standards of MIL-S-19500
- ✦ 1.0 ampere operation at $T_A=75^\circ\text{C}$ and 55°C with no thermal runaway
- ✦ Typical I_R less than 0.1 uA
- ✦ High temperature soldering guaranteed: 350°C / 10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

- ✦ Case: JEDEC DO-41 molded plastic over glass body
- ✦ Lead: Plated axial leads, solderable per MIL-STD-750, Method 2026
- ✦ Polarity: Color band denotes cathode end
- ✦ Mounting position: Any
- ✦ Weight: 0.012 ounce, 0.3 gram

DO-41

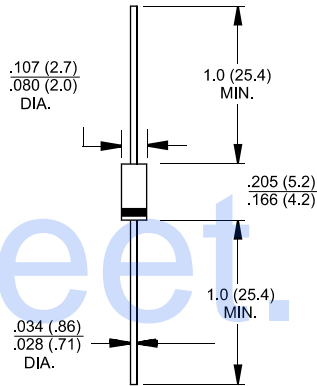

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	1N 4001GP	1N 4002GP	1N 4003GP	1N 4004GP	1N 4005GP	1N 4006GP	1N 4007GP	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length @ $T_A = 75^\circ\text{C}$	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	1.1							V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	5.0 50							uA uA
Maximum Full Load Reverse Current, Full Cycle Average .375" (9.5mm) Lead Length @ $T_A=75^\circ\text{C}$	30							uA
Typical Junction Capacitance (Note 1)	8.0							pF
Typical Thermal Resistance $R_{\theta JA}$ (Note 2)	55							$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range T_J, T_{STG}	-65 to +175							$^\circ\text{C}$

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

2. Thermal Resistance from Junction to Ambient .375" (9.5mm) Lead Length.

RATINGS AND CHARACTERISTIC CURVES (1N4001GP THRU 1N4007GP)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

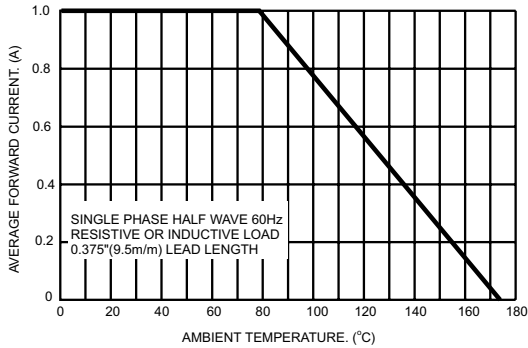


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

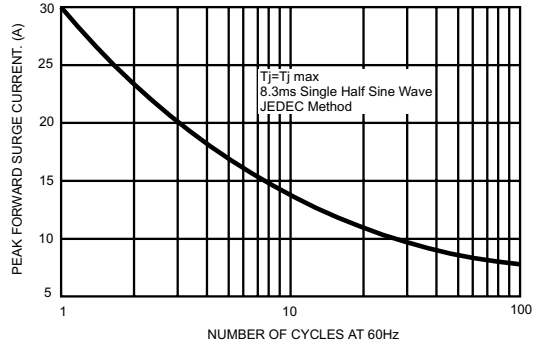


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

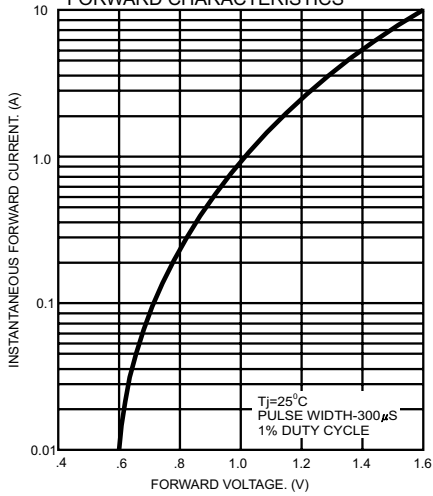


FIG.4- TYPICAL REVERSE CHARACTERISTICS

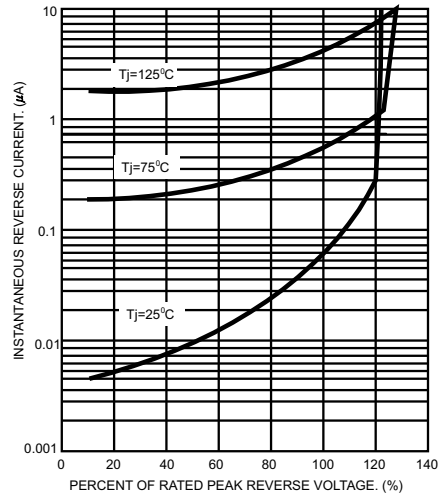


FIG.5- TYPICAL JUNCTION CAPACITANCE

