

TYPE NUMBER	MFR	APP	CMP	GBP MIN	SLEW RATE MIN	V <sub>S+</sub> MAX	V <sub>S-</sub> MAX	T <sub>OP</sub> MAX	A <sub>VO1</sub> MIN	V <sub>IO</sub> MAX	I <sub>B</sub> MAX	I <sub>IO</sub> MAX	P <sub>TOT</sub> MAX	I <sub>OUT</sub> MIN	V <sub>OUT</sub> MIN	V <sub>ICM</sub> MAX	V <sub>IDF</sub> MAX	dV <sub>IO</sub> /dT MAX	P <sub>O</sub> MAX	I <sub>O</sub> MAX	CM RR MIN	PS RR MIN	R <sub>IN</sub> MIN
MIC712-5C	OBS	WBA	EXT	3MHZ		+13V	-8V	70C	66dB	5MV	7.5uA	2uA	500MWF	3MA	5V	5V	5V	20uV/C	120MW	7MA	70dB	70dB	10K
MIC712-5D	OBS	WBA	EXT	3MHZ		+13V	-8V	70C	66dB	5MV	7.5uA	2uA	670MWF	3MA	5V	5V	5V	20uV/C	120MW	7MA	70dB	70dB	10K
MIC730-1C	OBS	BDO	EXT	1MHZ		+15V		125C	40dB	2.5MV	7.5uA	1.5uA	500MWF		2V	4V	5V		156MW	13MA	70dB		5K
MIC730-5C	FAU	BDO	EXT	1MHZ		+15V		70C	40dB	5MV	16uA	3uA	500MWF		2V	4V	5V		156MW	13MA	60dB		2.5K
MIC741-1D	OBS	GPK	INT	4MHZ	0.3V/uS	+22V	-22V	125C	94dB	3MV	80NA	30NA	670MWF	5MA	12V	15V	30V	15uV/C	150MW		80dB	86dB	1M
MIC741-1C	OBS	GPK	INT		0.2V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	500MWF	7MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MIC741-5C	OBS	GPK	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	500MWF	5MA	12V	15V	30V			3MA	70dB	76dB	300K
MIC741-5D	FAU	GPK	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	670MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
ML101AF	OBS	GPU	EXT			+22V	-22V	125C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	1.5M
ML101AM	OBS	GPU	EXT			+22V	-22V	125C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	1.5M
ML101AT	OBS	GPU	EXT			+22V	-22V	125C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	1.5M
ML101F	OBS	GPU	EXT			+22V	-22V	125C	94dB	5MV	1.5uA	0.5uA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	70dB	70dB	300K
ML101M	OBS	GPU	EXT			+22V	-22V	125C	94dB	5MV	1.5uA	0.5uA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	70dB	70dB	300K
ML101T	OBS	GPU	EXT			+22V	-22V	125C	94dB	5MV	500NA	200NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	70dB	70dB	300K
ML107F	OBS	GPK	INT			+22V	-22V	125C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	1.5M
ML107M	OBS	GPK	INT			+22V	-22V	125C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	1.5M
ML107T	OBS	GPK	INT			+22V	-22V	125C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	1.5M
ML108AF	OBS	SBA	EXT			+20V	-20V	125C	98dB	0.5MV	2NA	0.2NA	500MWF	1MA	13V	15V	1V	5uV/C		6MA	96dB	96dB	30M
ML108AM	OBS	SBA	EXT			+20V	-20V	125C	98dB	0.5MV	2NA	0.2NA	500MWF	1MA	13V	15V	1V	5uV/C		6MA	96dB	96dB	30M
ML108AT	OBS	SBA	EXT			+20V	-20V	125C	98dB	0.5MV	2NA	0.2NA	500MWF	1MA	13V	15V	1V	5uV/C		6MA	96dB	96dB	30M
ML108M	OBS	SBA	EXT			+20V	-20V	125C	96dB	2MV	2NA	0.2NA	500MWF	1MA	13V	15V	1V	15uV/C		6MA	85dB	80dB	30M
ML108T	OBS	SBA	EXT			+20V	-20V	125C	96dB	2MV	2NA	0.2NA	500MWF	1MA	13V	15V	1V	15uV/C		6MA	85dB	80dB	30M
ML111F	OBS	CPR	EXT			+18V	-18V	125C	100dB	3MV	100NA	10NA	500MWF			15V	30V			6MA			
ML111M	OBS	CPR	EXT			+18V	-18V	125C	100dB	3MV	100NA	10NA	500MWF			15V	30V			6MA			
ML111S	OBS	CPR	EXT			+18V	-18V	125C	100dB	3MV	100NA	10NA	500MWF	8MA		15V	30V			6MA			
ML111T	OBS	CPR	EXT			+18V	-18V	125C	100dB	3MV	100NA	10NA	500MWF			15V	30V			6MA			
ML118F	OBS	XSR	INT		50V/uS	+20V	-20V	125C	94dB	4MV	250NA	50NA	500MWF	6MA	12V	15V	1V			8MA	80dB	70dB	1M
ML118M	OBS	XSR	INT		50V/uS	+20V	-20V	125C	94dB	4MV	250NA	50NA	500MWF	6MA	12V	15V	1V			8MA	80dB	70dB	1M
ML118T	OBS	XSR	INT		50V/uS	+20V	-20V	125C	94dB	4MV	250NA	50NA	500MWF	6MA	12V	15V	1V			8MA	80dB	70dB	1M
ML201AF	OBS	GPU	EXT			+22V	-22V	85C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	500K
ML201AM	OBS	GPU	EXT			+22V	-22V	85C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	500K
ML201AT	OBS	GPU	EXT			+22V	-22V	85C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	500K
ML201F	OBS	GPU	EXT			+22V	-22V	85C	94dB	7.5MV	1.5uA	0.5uA	500MWF	5MA	12V	15V	30V	30uV/C		3MA	65dB	70dB	100K
ML201M	OBS	GPU	EXT			+22V	-22V	85C	86dB	7.5MV	1.5uA	0.5uA	500MWF	5MA	12V	15V	30V	30uV/C		3MA	65dB	70dB	100K
ML201T	OBS	GPU	EXT			+22V	-22V	85C	86dB	7.5MV	1.5uA	0.5uA	500MWF	5MA	12V	15V	30V	30uV/C		3MA	65dB	70dB	100K
ML207F	OBS	GPK	INT			+22V	-22V	85C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	1.5M
ML207M	OBS	GPK	INT			+22V	-22V	85C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	1.5M
ML207T	OBS	GPK	INT			+22V	-22V	85C	94dB	2MV	75NA	10NA	500MWF	5MA	12V	15V	30V	15uV/C		3MA	80dB	80dB	1.5M
ML208AF	OBS	SBA	EXT			+20V	-20V	85C	98dB	0.5MV	2NA	0.2NA	500MWF	1MA	13V	15V	1V	5uV/C		6MA	96dB	96dB	30M
ML208AM	OBS	SBA	EXT			+20V	-20V	85C	98dB	0.5MV	2NA	0.2NA	500MWF	1MA	13V	15V	1V	5uV/C		6MA	96dB	96dB	30M
ML208AT	OBS	SBA	EXT			+20V	-20V	85C	98dB	0.5MV	2NA	0.2NA	500MWF	1MA	13V	15V	1V	5uV/C		6MA	96dB	96dB	30M
ML208M	OBS	SBA	EXT			+20V	-20V	85C	96dB	2MV	2NA	0.2NA	500MWF	1MA	13V	15V	1V	15uV/C		6MA	85dB	80dB	30M
ML208T	OBS	SBA	EXT			+20V	-20V	85C	96dB	2MV	2NA	0.2NA	500MWF	1MA	13V	15V	1V	15uV/C		6MA	85dB	80dB	30M
ML211F	OBS	CPR	EXT			+18V	-18V	85C	100dB	3MV	100NA	10NA	500MWF			15V	30V			6MA			
ML211M	OBS	CPR	EXT			+18V	-18V	85C	100dB	3MV	100NA	10NA	500MWF			15V	30V			6MA			
ML211S	OBS	CPR	EXT			+18V	-18V	85C	100dB	3MV	100NA	10NA	500MWF			15V	30V			6MA			
ML211T	OBS	CPR	EXT			+18V	-18V	85C	100dB	3MV	100NA	10NA	500MWF			15V	30V			6MA			
ML218F	OBS	XSR	INT		50V/uS	+20V	-20V	85C	94dB	4MV	250NA	50NA	500MWF	6MA	12V	15V	1V			8MA	80dB	70dB	1M
ML218M	OBS	XSR	INT		50V/uS	+20V	-20V	85C	94dB	4MV	250NA	50NA	500MWF	6MA	12V	15V	1V			8MA	80dB	70dB	1M
ML218T	OBS	XSR	INT		50V/uS	+20V	-20V	85C	94dB	4MV	250NA	50NA	500MWF	6MA	12V	15V	1V			8MA	80dB	70dB	1M
ML301AP	OBS	GPU	EXT			+18V	-18V	70C	88dB	7.5MV	250NA	50NA	500MWF	5MA	12V	15V	30V	30uV/C		3MA	70dB	70dB	500K
ML301AS	OBS	GPU	EXT			+18V	-18V	70C	88dB	7.5MV	250NA	50NA	500MWF	5MA	12V	15V	30V	30uV/C		3MA	70dB	70dB	500K
ML301AT	OBS	GPU	EXT			+18V	-18V	70C	88dB	7.5MV	250NA	50NA	500MWF	5MA	12V	15V	30V	30uV/C		3MA	70dB	70dB	500K
ML301P	OBS	GPU	EXT			+18V	-18V	70C	83dB	10MV	2uA	75uA	500MWF		12V	15V	30V	30uV/C		3MA	65dB	70dB	100K
ML301S	OBS	GPU	EXT			+18V	-18V	70C	83dB	10MV	2uA	75uA	500MWF		12V	15V	30V	30uV/C		3MA	65dB	70dB	100K
ML301T	OBS	GPU	EXT			+18V	-18V	70C	83dB	10MV	2uA	75uA	500MWF		12V	15V	30V	30uV/C		3MA	65dB	70dB	100K
ML307P	OBS	GPK	INT			+18V	-18V	70C	84dB	7.5MV	250NA	50NA	500MWF	5MA	12V	15V	30V	30uV/C			70dB	70dB	0.5M
ML307S	OBS	GPK	INT			+18V	-18V	70C	84dB	7.5MV	250NA	50NA	500MWF	5MA	12V	15V	30V	30uV/C			70dB	70dB	0.5M
ML307T	OBS	GPK	INT			+18V	-18V	70C	84dB	7.5MV	250NA	50NA	500MWF	5MA	12V	15V	30V	30uV/C			70dB	70dB	0.5M
ML308AM	OBS	SBA	EXT			+18V	-18V	70C	98dB	0.5MV	7NA	1NA	500MWF	1MA	13V	15V	1V	5uV/C		6MA	96dB	96dB	10M

For detailed explanations of column heading notations, see App. A

Also for ready references the more important abbreviations listed in the column headings are used below:

LEFT HAND PAGE

- APP = application (codes at APP.E.)
- CMRR = common mode rejection ratio
- CMP = compensation (frequency)
- dV<sub>in</sub>/dT = input offset voltage temperature drift
- GBP = gain bandwidth product
- I<sub>B</sub> = input bias current
- I<sub>IO</sub> = input bias offset current
- I<sub>Q</sub> = quiescent supply current
- MFR = manufacturer (codes at App.C.)
- P<sub>D</sub> = quiescent power consumer
- PSRR = power supply rejection ratio
- V<sub>ICM</sub> = common mode input voltage rating
- V<sub>IOF</sub> = differential input voltage rating
- V<sub>IO</sub> = input offset voltage
- V<sub>S</sub> = dc supply voltage

RIGHT HAND PAGE

Lead out coding summary (details at APP.G.) for different cases (APP.F.)

- A = gain adjust
- B = bias adjust
- C = case
- E- = inverting input
- E+ = non-inverting input
- F,F\* = input frequency compensation
- G = ground
- J = high level input
- K = output, open collector
- L = output, open emitter
- M = metal case
- N = not connected
- Q = special terminal
- R,R\* = outputs
- S = strobe
- T,T\* = offset balance
- V+ = +ve dc supply
- V- = -ve dc supply
- W = guard ring
- X = blank position, no lead
- ++ = +ve supplementary dc supply
- = -ve supplementary dc supply
- ø,ø\* = output frequency compensation

CASE (APP.F.)	LD 1	LD 2	LD 3	LD 4	LD 5	LD 6	LD 7	LD 8	LD 9	LD 10	LD 11	LD 12	LD 13	LD 14	LD 15	LD 16	EUROPE SUBSTITUTE	USA SUBSTITUTE	IS S	TYPE NUMBER	
T05-8/1M	G	E-	E+	V-M	F	ø	R	V+									SN72702L	UA702HC	0	MIC712-5C	
DIL-14/1C	N	N	G	E-	E+	V-	N	N	F	ø	R	N	V+	N			SN72702J	UA702DC	0	MIC712-5D	
T05-8/1M	R*1	E-	E+	G	R1	R2	V+	R*2										UA730M	UA730M	0	MIC730-1C
T05-8/1M	R*1	E-	E+	G	R1	R2	V+	R*2										UA730HC	UA730HC	0	MIC730-5C
DIL-14/1C	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			LM741D	UA741DM	0	MIC741-1D	
T05-8/1M	T	E-	E+	V-M	T*	R	V+	N									TBA222	UA741HM	0	MIC741-1C	
T05-8/1M	T	E-	E+	V-M	T*	R	V+	N									TBA221	UA741HC	0	MIC741-5C	
DIL-14/1C	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			TBA221A	UA741DC	0	MIC741-5D	
FLP-10/3C	N	FT	E-	E+	V-	T*	R	V+	F*	N							SFC2101APM	LM101AF	0	ML101AF	
DIL-14/1C	N	N	FT	E-	E+	V-	N	N	T*	R	V+	F*	N	N			UA101AD	LM101AJ14	0	ML101AM	
T05-8/1M	FT	E-	E+	V-M	T*	R	V+	F*									SFC2101A	LM101AH	0	ML101AT	
FLP-10/3G	N	FT	E-	E+	V-	T*	R	V+	F*	N							SFC2101APM	LM101F	0	ML101F	
DIL-14/1C	N	N	FT	E-	E+	V-	N	N	T*	R	V+	F*	N	N			UA101D	LM101J14	0	ML101M	
T05-8/1M	FT	E-	E+	V-M	T*	R	V+	F*									SFC2101A	LM101H	0	ML101T	
FLP-10/3C	N	N	E-	E+	V-	N	R	V+	N								SFC2107PM	LM107F	0	ML107F	
DIL-14/1C	N	N	N	E-	E+	V-	N	N	N	R	V+	N	N	N			SN52107JA	LM107D	0	ML107M	
T05-8/1M	N	E-	E+	V-M	N	R	V+	N									SFC2107M	LM107H	0	ML107T	
FLP-10/3G	N	N	E-	E+	N	V-	R	V+	F*	F							UA108AF	LM108AF	0	ML108AF	
DIL-14/1C	N	F	N	E-	E+	N	V-	N	N	R	V+	F*	N	N			UA108AD	LM108AD	0	ML108AM	
T05-8/1M	F	E-	E+	V-M	N	R	V+	F*									SFC2108A	LM108AH	0	ML108AT	
DIL-14/1C	N	F	N	E-	E+	N	V-	N	N	R	V+	F*	N	N			UA108D	LM108D	0	ML108M	
T05-8/1M	F	E-	E+	V-M	N	R	V+	F*									SFC2108M	LM108H	0	ML108T	
FLP-10/3G	G	E+	E-	V-	T	T*S	N	R	V+								SN52111FA	LM111F	0	ML111F	
DIL-14/1C	N	G	E+	E-	N	V-	T	T*S	R	N	V+	N	N	N			SN52111J	LM111D	0	ML111M	
DIL-8/1C	G	E+	E-	V-	T	T*S	R	V+									SFC2311DC	UA111R	0	ML111S	
T05-8/1M	G	E+	E-	V-	T	T*S	R	V+									SFC2111M	LM111H	0	ML111T	
FLP-10/3G	N	T*F	E-	E+	V-	F*T	R	V+	ø	N							AM118-FLP	LM118F	0	ML118F	
DIL-14/1C	N	N	T*F	E-	E+	V-	N	N	F*T	R	V+	ø	N	N			SN52118JA	LM118D	0	ML118M	
T05-8/1M	T*F	E-	E+	V-	F*T	R	V+	ø									TDC0118CM	LM118H	0	ML118T	
FLP-10/3G	N	FT	E-	E+	V-	T*	R	V+	F*	N							SFC2201APT	LM201AF	0	ML201AF	
DIL-14/1C	N	N	FT	E-	E+	V-	N	N	T*	R	V+	F*	N	N			UA201AD	LM201AJ14	0	ML201AM	
T05-8/1M	FT	E-	E+	V-M	T*	R	V+	F*									SFC2101A	LM201AH	0	ML201AT	
FLP-10/3G	N	FT	E-	E+	V-	T*	R	V+	F*	N							SFC2201APM	LM201F	0	ML201F	
DIL-14/1C	N	N	FT	E-	E+	V-	N	N	T*	R	V+	F*	N	N			UA201D	LM201J14	0	ML201M	
T05-8/1M	FT	E-	E+	V-M	T*	R	V+	F*									SFC2101A	LM201H	0	ML201T	
FLP-10/3C	N	N	E-	E+	V-	N	R	V+	N	N							SFC2207PT	LM207F	0	ML207F	
DIL-14/1C	N	N	N	E-	E+	V-	N	N	N	R	V+	N	N	N			SN52107JA	LM207D	0	ML207M	
T05-8/1M	N	E-	E+	V-M	N	R	V+	N									SFC2207	LM207H	0	ML207T	
FLP-10/3G	N	N	E-	E+	N	V-	R	V+	F*	F							UA208AF	LM208AF	0	ML208AF	
DIL-14/1C	N	F	N	E-	E+	N	V-	N	N	R	V+	F*	N	N			UA208AD	LM208AD	0	ML208AM	
T05-8/1M	F	E-	E+	V-M	N	R	V+	F*									SFC2208A	LM208AH	0	ML208AT	
DIL-14/1C	N	F	N	E-	E+	N	V-	N	N	R	V+	F*	N	N			UA208D	LM208D	0	ML208M	
T05-8/1M	F	E-	E+	V-M	N	R	V+	F*									SFC2208	LM208H	0	ML208T	
FLP-10/3G	G	E+	E-	N	V-	T	T*S	N	R	V+							SN52111FA	LM211F	0	ML211F	
DIL-14/1C	N	G	E+	E-	N	V-	T	T*S	R	N	V+	N	N	N			SN52111J	LM211D	0	ML211M	
T05-8/1M	G	E+	E-	V-	T	T*S	R	V+									SN52111JP	UA111R	0	ML211S	
T05-8/1M	G	E+	E-	V-	T	T*S	R	V+									SFC2211	LM211H	0	ML211T	
FLP-10/3G	N	T*F	E-	E+	V-	F*T	R	V+	ø	N							LM218F	LM218F	0	ML218F	
DIL-14/1C	N	N	T*F	E-	E+	V-	N	N	F*T	R	V+	ø	N	N			LM218D	LM218D	0	ML218M	
T05-8/1M	T*F	E-	E+	V-	F*T	R	V+	ø									TDB0118CM	LM218H	0	ML218T	
DIL-14/1P	N	N	FT	E-	E+	V-	N	N	T*	R	V+	F*	N	N			UA301AD	LM301AJ14	0	ML301AP	
DIL-8/1P	FT	E-	E+	V-	T*	R	V+	F*									SFC2301ADC	LM301AJ	0	ML301AS	
T05-8/1M	FT	E-	E+	V-M	T*	R	V+	F*									SFC2301AH	LM301AH	0	ML301AT	
DIL-14/1P	N	N	FT	E-	E+	V-	N	N	T*	R	V+	F*	N	N			LM301H	LM301H	0	ML301P	
DIL-8/1P	FT	E-	E+	V-	T*	R	V+	F*									SFC2301ADC	LM201J	0	ML301S	
T05-8/1M	FT	E-	E+	V-M	T*	R	V+	F*									SFC2301A	LM301H	0	ML301T	
DIL-14/1P	N	N	N	E-	E+	V-	N	N	N	R	V+	N	N	N			SN72307JA	LM307D	0	ML307P	
DIL-8/1P	N	E-	E+	V-	N	R	V+	N									SFC2307DC	LM307N	0	ML307S	
T05-8/1M	N	E-	E+	V-M	N	R	V+	N									SFC2307	LM307H	0	ML307T	
DIL-14/1C	N	F	N	E-	E+	N	V-	N	N	R	V+	F*	N	N			SN72308AJA	LM308AD	0	ML308AM	

# Appendix A

# Explanatory notes to tabulations

The general layout plan of the information in the tables of this compendium should be immediately evident from the data tabulation explanatory chart set out overleaf.

Supporting Appendices with additional information are:

- App. B Glossary of *Opamp Terms*
- App. C Tabulation *Codes for Manufacturers*
- App. D IC Manufacturers' *House Numbers*
- App. E Tabulation *Codes for Applications*
- App. F *Case Outline and Leadout Diagrams*
- App. G Codes for *Leadout Connections*

Unit symbols used in the tables are:

- A = amperes
- C = °centigrade
- dB = decibels
- G = gigaohms (megohms  $\times 10^3$ )
- GHZ = gigahertz (megahertz  $\times 10^3$ )
- K = kilohms
- KHZ = kilohertz
- M = megohms
- MA = milliamperes, mA
- MAX = maximum
- MHZ = megahertz
- MIN = minimum
- MV = millivolts
- MWC = milliwatts, case at 25C
- MWF = milliwatts, free air at 25C
- MWH = milliwatts, heat sink, 25C
- NA = nanoamps (microamps  $\times 10^{-3}$ )
- NV = nanovolts (microvolts  $\times 10^{-3}$ )
- PA = picoamps (microamps  $\times 10^{-12}$ )
- R = ohms
- T = teraohms (megohms  $\times 10^6$ )
- V = volts
- WC = watts, case at 25C
- WF = watts, free air at 25C
- WH = watts, heatsink, 25C
- $\mu$ A = microamps
- $\mu$ S = microseconds
- $\mu$ V = microvolts
- $\mu$ W = microwatts
- $\mu$ WF = microwatts, free air at 25C

Where a unit symbol appears in the middle of a value, it indicates the position of the decimal point, e.g. 3K3 = 3.3K.

# Appendix A

TYPE NUMBER	MFR	APP	CMP	GBP MIN	SLEW RATE MIN	V <sub>S</sub> <sup>+</sup> MAX	V <sub>S</sub> <sup>-</sup> MAX	T <sub>OP</sub> MAX	A <sub>VOL</sub> MIN	V <sub>IO</sub> MAX	I <sub>B</sub> MAX	I <sub>IO</sub> MAX	P <sub>TOT</sub> MAX	I <sub>OUT</sub> MIN	V <sub>OUT</sub> MIN	V <sub>ICM</sub> MAX	V <sub>IDF</sub> MAX	dV <sub>IO</sub> /dT MAX	P <sub>O</sub> MAX	I <sub>O</sub> MAX	CMRR MIN	PSRR MIN	R <sub>IN</sub> MIN	
(EXAMPLE) LH0022CH	NAU	FET	INT	.3MHZ	1V/μS	+22V	-22V	85C	97dB	6MV	25pA	5pA	500mW	10mA	10V	15V	30V	15μV/C	85mW	3mA	70dB	70dB	0.1T	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>TYPE No. NUMERO-ALPHABETIC LISTING</p> <p>MFR = MANUFACTURER CODED AS APP. C</p> <p>APP = APPLICATION CODED AS APP. E</p> <p>CMP = FREQUENCY COMPENSATION WITH INT = INTERNAL EXT = EXTERNAL</p> <p>GBP MIN = UNITY GAIN BANDWIDTH PRODUCT, MIN; IN KHZ, MHZ, or GHZ</p> <p>SLEW RATE, MIN. IN VOLTS PER MICROSECOND. V/μS</p> <p>V<sub>S</sub><sup>+</sup> MAX = MAX. PERMISSIBLE +VE DC SUPPLY VOLTAGE IN VOLTS, V</p> <p>V<sub>S</sub><sup>-</sup> MAX = MAX. PERMISSIBLE -VE DC SUPPLY VOLTAGE IN VOLTS, V</p> <p>T<sub>OP</sub> MAX = MAX. PERMISSIBLE OPERATIONAL AMBIENT TEMPERATURE IN °C.</p> <p>A<sub>VOL</sub> MIN = MIN. OPEN-LOOP VOLTAGE GAIN IN DB</p> <p>V<sub>IO</sub> MAX = MAX INPUT OFFSET VOLTAGE AT 25°C IN MV or μV.</p> <p>I<sub>B</sub> MAX = MAX. INPUT BIAS CURRENT AT 25°C IN MA, μA, nA or pA</p> </div> <div style="width: 45%;"> <p>I<sub>O</sub> MAX = MAX. QUIESCENT (NO SIGNAL, NO LOAD) CURRENT CONSUMPTION IN MA</p> <p>P<sub>O</sub> MAX = MAX. QUIESCENT (NO SIGNAL, NO LOAD) POWER CONSUMPTION IN MW</p> <p>dV<sub>IO</sub>/dT MAX = MAX. INPUT OFFSET VOLTAGE TEMPERATURE DRIFT IN μV/C OR MV/C</p> <p>V<sub>IDF</sub> MAX = MAX. PERMISSIBLE DIFFERENTIAL INPUT VOLTAGE IN V.</p> <p>V<sub>ICM</sub> MAX = MAX. PERMISSIBLE COMMON-MODE INPUT VOLTAGE IN VOLTS, V</p> <p>V<sub>OUT</sub> MIN = GUARANTEED MIN. OUTPUT VOLTAGE, PEAK VALUE, IN VOLTS, V</p> <p>I<sub>OUT</sub> MIN = GUARANTEED MINIMUM OUTPUT CURRENT, PEAK VALUE, IN MA OR μA.</p> <p>P<sub>TOT</sub> MAX = MAX. PERMISSIBLE POWER DISSIPATION IN W, mW, μW WITH F = FREE AIR 25°C, C = CASE 25°C, H = HEATSINK 25°C.</p> <p>I<sub>IO</sub> MAX = MAX. INPUT OFFSET CURRENT AT 25°C IN MA, μA, nA, OR pA</p> </div> </div> <div style="margin-top: 20px;"> <p>* R<sub>IN</sub> MIN = MIN. IN-PUT RESISTANCE</p> <p>PSRR MIN = MIN. POWER SUPPLY REJECTION RATIO IN DB</p> <p>CMRR MIN = MIN. COMMON MODE REJECTION RATIO IN DB</p> </div>																								
<p>[NOTE: FOR FURTHER EXPLANATION OF SPECIAL TERMS SEE APP. B]</p> <p>* R<sub>IN</sub> EXPRESSED AS OHMS (R), KILOHMS (K), MEGOHMS (M), GIGAOHMS (G) OR TERAHMS (T)</p>																								

## Appendix A

### LEFT HAND PAGE

For detailed explanations of column heading notations, see App. A.

Also for ready references the more important abbreviations used in the column headings are listed below:

- APP = application  
(codes at APP.E.)
- CMRR = common mode rejection ratio
- CMP = compensation  
(frequency)
- $dV_{io}/dT$  = input offset voltage temperature drift
- GBP = gain bandwidth product
- $I_B$  = input bias current
- $I_{IO}$  = input bias offset current
- $I_Q$  = quiescent supply current
- MFR = manufacturer  
(codes at App.C.)
- $P_Q$  = quiescent power consumer
- PSRR = power supply rejection ratio
- $V_{icm}$  = common mode input voltage rating
- $V_{idc}$  = differential input voltage rating
- $V_{io}$  = input offset voltage
- $V_S$  = dc supply voltage

### RIGHT HAND PAGE

Lead out coding summary (details at APP.G.) for different cases (APP.F.)

- A = gain adjust
- B = bias adjust
- C = case
- E- = inverting input
- E+ = non-inverting input
- F,F\* = input frequency compensation
- G = ground
- J = high level input
- K = output, open collector
- L = output, open emitter
- M = metal case
- N = not connected
- Q = special terminal
- R,R\* = outputs
- S = strobe
- T,T\* = offset balance
- V+ = +ve dc supply
- V- = -ve dc supply
- W = guard ring
- X = blank position, no lead
- + + = +ve supplementary dc supply
- - = -ve supplementary dc supply
- $\phi, \phi^*$  = output frequency compensation

CASE (APP. F.)	LD 1	LD 2	LD 3	LD 4	LD 5	LD 6	LD 7	LD 8	LD 9	LD 10	LD 11	LD 12	LD 13	LD 14	LD 15	LD 16	EUROPE SUBSTITUTION	USA SUBSTITUTION	ISS	TYPE NUMBER	
T05-8/1M	T	E-	E+	V-	T*	R	V+	N	.	.	.	.	.	.	.	.	.	.	LH0022H	0	LH0022CH

CASE = PACKAGE OF DIFFERENT TYPES CODED ACCORDING TO APP. F - FIRST NUMBER INDICATES NUMBER OF LEAD POSITIONS EG DIL-14 = 14 LEAD DUAL-IN-LINE PACKAGE

TYPE No. REPEATED ON R.H. MARGIN

ISS = ISSUE NUMBER OF DATA ENTRY

USA SUBSTITUTION = SUGGESTED ALTERNATIVE AVAILABLE IN USA.

EURO SUBSTITUTION = PROELECTRON STANDARD OR OTHER TYPE AVAILABLE IN EUROPE

LD1, LD2, ETC = LEAD NUMBERS WITH CONNECTIONS ACCORDING TO PAGE FOOTNOTE OR APP. G.

# Appendix C

## Tabulation Codes for Manufacturers

<b>ADU</b>	<b>Advanced Micro Devices Inc.,</b> 901 Thompson Pl., Sunnyvale, CA 94086, USA	<b>ITU</b>	DA14 5HT, UK <b>ITT Semiconductors</b> 74 Commerce Way, Woburn, MA, 01801, USA
<b>ANG</b>	<b>Analog Devices Ltd,</b> Central Ave., East Molesey, KT8 9BR, Surrey, UK	<b>MNG</b>	<b>Mitsubishi Shoji Kaisha Ltd,</b> Bow Bells House, Bread St., London, EC4, UK
<b>ANU</b>	<b>Analog Devices Inc.,</b> P.O. Box 280, Norwood, Mass., 02062	<b>MNJ</b>	<b>Mitsubishi Electric Corp.,</b> 2-12 Marunouchi, Chiyoda-ku, Tokyo, Japan
<b>BLG</b>	<b>Bell &amp; Howell Ltd,</b> Lennox Road, Basingstoke, Hants, UK	<b>MTG</b>	<b>Motorola Ltd</b> (Semiconductor Products Div.), York House, Empire Way, Wembley, Middlesex, HA9 0PR, UK
<b>BLU</b>	<b>Bell &amp; Howell</b> (Control Products Divison), 706 Bostwick Ave, Bridgeport, Conn. 06605, USA	<b>MTU</b>	<b>Motorola Semiconductor Products Inc.,</b> 5005 E. McDowell Road, Phoenix, AZ, 85008, USA
<b>BUG</b>	<b>Burr-Brown International Ltd,</b> 17 Exchange Rd, Watford, WQD1 7EB, Herts., UK	<b>MUG</b>	<b>Mullard Ltd,</b> Mullard House, Torrington Place, London, WC1E 7HD, UK
<b>BUU</b>	<b>Burr-Brown Research Corp.,</b> P.O. Box 11400, Tucson, AZ, 85734, USA	<b>NAG</b>	<b>National Semiconductor (UK) Ltd,</b> Harpur Centre, Bedford, MK40 3LF, UK
<b>CMG</b>	<b>Computing Techniques Ltd,</b> Brookers Rd, Billingshurst, Sussex, RH14 9RZ, UK	<b>NAU</b>	<b>National Semiconductor Corp.,</b> 2900 Semiconductor Drive, Santa Clara, CA, 95051, USA
<b>DAG</b>	<b>Datel UK Ltd,</b> Stephenson Close, Portway Ind. Estate, Andover, Hants, UK	<b>NIJ</b>	<b>Nippon Electric Co. Ltd,</b> 1753 Shimonumabe, Nakahara-ku, Kawasaki, Japan
<b>DAU</b>	<b>Datel Systems Inc.,</b> 1020 Turnpike St., Canton, MA 02021, USA	<b>OAU</b>	<b>Opamp Labs Inc.,</b> 1033 N. Sycamore Ave., Los Angeles, CA 90038, USA
<b>FAG</b>	<b>Fairchild Camera &amp; Instrument (UK) Ltd,</b> 230 High St., Potters Bar, Herts., UK	<b>OBS</b>	Obsolete – no longer commercially available.
<b>FAU</b>	<b>Fairchild Semiconductor</b> 464 Ellis St., Mountain View, CA 94042, USA	<b>OTU</b>	<b>Optical Electronics Inc.,</b> P.O. Box 11140, Tucson, AZ, 85734, USA
<b>FEG</b>	<b>Ferranti Ltd,</b> (Electronic Department), Gem Mill, Chadderton, Oldham, Lancs., OL9 8NP, UK	<b>PLG</b>	<b>Plessey Semiconductors,</b> Cheney Manor, Swindon, Wilts., SN2 2QW, UK
<b>FUJ</b>	<b>Fujitsu Ltd,</b> 1015 Kamikodanaka, Kawasaki, Japan	<b>PRG</b>	<b>Precision Monolithics</b> (Bourns Trimpot Ltd) 17/27 High St., Hounslow, Middlesex, UK
<b>HAG</b>	<b>Harris Semiconductor (Memec) Ltd,</b> The Firs, Whitchurch, Nr. Aylesbury, Bucks., HP22 4JU, UK	<b>PRU</b>	<b>Precision Monolithics (Bourns) Inc.,</b> 1500 Space Park Drive, Santa Clara, CA, 95050, USA
<b>HAU</b>	<b>Harris Semiconductor</b> P.O. Box 883, Melbourne, FL, 32901, USA	<b>RAG</b>	<b>Raytheon Semiconductor</b> The Pinnacles, Harlow, Essex, CM19 5BB, UK
<b>HIJ</b>	<b>Hitachi Ltd</b> (Semiconductor and IC Div.), 1450 Josuihonimachi, Kodaira City, Tokyo, Japan	<b>RAU</b>	<b>Raytheon Semiconductor,</b> 350 Ellis Street, Mountain View, CA, 94042, USA
<b>ING</b>	<b>Intersil Inc.,</b> 8 Tessa Rd, Richfield Trading Estate, Reading, Berks., UK	<b>RCG</b>	<b>RCA (Great Britain) Ltd,</b> Lincoln Way, Windmill Road, Sunbury-on- Thames, Middlesex, UK
<b>INU</b>	<b>Intersil Inc.,</b> 10900 N. Tantau Ave, Cupertino, CA, 95014, USA	<b>RCU</b>	<b>RCA Solid State Division</b> Route 202, Somerville, NJ, 08876, USA
<b>ITG</b>	<b>ITT Semiconductors</b> Maidstone Rd, Fooks Cray, Sidcup, Kent,	<b>SAJ</b>	<b>Sanken Electric Co. Ltd,</b> 1-22-8 Nishi-Ikebukuro, Toshima-Ku, Tokyo, Japan

Appendix C

<b>SGG</b>	<b>SGS-ATES (UK) Ltd,</b> Planar House, Walton Street, Aylesbury, Bucks., UK	<b>SPU</b>	<b>Sprague Electric Company</b> (Semiconductor Div.), 115 Northeast Cutoff, Worcester, MA, 01606, USA
<b>SGI</b>	<b>SGS-ATES Componenti Spa,</b> Via Olivetti, 2 Agrate Brianza, 20041, Milan, Italy	<b>TDG</b>	<b>Teledyne Semiconductor,</b> Heathrow House, Bath Road, Cranford, Hounslow, Middlesex, TW5 9QP, UK
<b>SHG</b>	<b>Shindengen Hyokuto Boeki Haisha Ltd,</b> St. Alphage House, Fore St., London, EC2Y 5DA, UK	<b>TDU</b>	<b>Teledyne (Amelco) Semiconductor,</b> 1300 Terra Bella Ave, Mountain View, CA, 94032, USA
<b>SHJ</b>	<b>Shindengen Electric Mfg Co., Ltd,</b> New Ohtemachi Bldng, 2-1, 2-chome, Ohtemachi, Chiyoda-ku, Tokyo, Japan	<b>TEB</b>	<b>Teledyne-Philbrick,</b> Heathrow House, Bath Road, Cranford, Hounslow, Middlesex, TW5 9QP, UK
<b>SIG</b>	<b>Siemens Ltd,</b> Great West Road, Brentford, Middlesex, TW8 9DG, UK	<b>TEU</b>	<b>Teledyne-Philbrick,</b> Allied Drive at Route 128, Dedham, MA, 02026, USA
<b>SIW</b>	<b>Siemens Aktiengesellschaft,</b> Richard-Strauss-Strasse 76, D-8000 Munchen 2, Postfach 202109, W. Germany	<b>TGG</b>	<b>Texas Instruments Ltd,</b> Manton Lane, Bedford, UK
<b>SJG</b>	<b>Signetics International Corporation</b> Yeoman House, 63 Croydon Rd, London, SE20, UK	<b>TGU</b>	<b>Texas Instruments Inc.</b> (Components Group), P.O. Box 5012, Dallas, Texas, 75222, USA
<b>SJU</b>	<b>Signetics Corp.,</b> 811 East Arques Ave, Sunnydale, CA. 94086, USA	<b>THF</b>	<b>Thomson-CSF (Sescosem),</b> 50 Rue Jean Pierre Timbaud, BP 120, 92403, Courbevoie, France
<b>SKU</b>	<b>Silicon General Inc.,</b> 7382 Bolsa Avenue, Westminster, CA, 92683, USA	<b>THG</b>	<b>Thomson-CSF (UK) Ltd,</b> Ringway House, Bell Rd, Daneshill, Basingstoke, Hants., RG24 0QG, UK.
<b>SLG</b>	<b>Siliconix Ltd,</b> 30A High St., Thatcham, Newbury, Berks., RG13 4JG, UK	<b>TKJ</b>	<b>Tokyo Sanyo Electric Co. Ltd</b> (Semiconductor Div.), Oizumachi, Oragun, Gumma, Japan
<b>SLU</b>	<b>Siliconix Incorporated,</b> 2201 Laurelwood Road, Santa Clara, CA, 95054, USA	<b>TOG</b>	<b>Toshiba (UK) Ltd,</b> Toshiba House, Great South West Rd, Feltham, Middlesex, UK
<b>SOJ</b>	<b>Sony Semiconductor Corp.,</b> 14-1, Asa hi-sho 4, Atsuigi-shi, Kanagawa-ken, 243, Japan	<b>TOJ</b>	<b>Toshiba (Tokyo Shibaura) Electric Co.,</b> 2-1, 5-chome, Ginza Chuo-ku, Tokyo, Japan
<b>SPG</b>	<b>Sprague Electric (UK) Ltd,</b> 159 High St., Yiewsley, W. Drayton, Middlesex, UB7 7RY, UK	<b>TRU</b>	<b>Transitron Electronic Corp.,</b> 168 Albion St., Wakefield, MA, 01881, USA
		<b>ZEU</b>	<b>Zeltex Inc.,</b> 940 Detroit Ave, Concord, CA, 94518, USA

# Appendix D

## IC Manufacturers'

### House Numbers

(General Note: Manufacturers often adopt their own 'in-house' serial numbering for their ICs. Listed below are the initial letters of numerical series used by different manufacturers.)

<b>AD</b>	Analog Devices	<b>OP</b>	Precision Monolithics
<b>ADO</b>	Analog Devices	<b>P</b>	Teledyne-Philbrick
<b>AM</b>	Advanced Micro Devices; Datel	<b>PF</b>	Teledyne-Philbrick
<b>AMD</b>	Advanced Micro Devices	<b>PG</b>	General Instruments (obs.)
<b>AMLM</b>	Advanced Micro Devices	<b>PP</b>	Teledyne-Philbrick
<b>AMSSS</b>	Advanced Micro Devices	<b>RA</b>	Radiation (now Harris)
<b>AMU</b>	Advanced Micro Devices	<b>RC</b>	Raytheon
<b>C</b>	Bell & Howell	<b>RL</b>	Raytheon
<b>CA</b>	RCA	<b>RM</b>	Raytheon
<b>CIA</b>	Teledyne-Philbrick	<b>RSN</b>	Raytheon
<b>CMP</b>	Precision Monolithics	<b>RV</b>	Raytheon
<b>CN</b>	Ferranti	<b>S</b>	Signetics
<b>DA</b>	Teledyne-Philbrick	<b>SA</b>	Teledyne-Philbrick
<b>EP</b>	Teledyne-Philbrick	<b>SE</b>	Signetics; Mullard
<b>ESL</b>	Teledyne-Philbrick	<b>SFC</b>	Thomson-CSF
<b>FSL</b>	Teledyne-Philbrick	<b>SG</b>	Silicon General
<b>FSS</b>	Ferranti	<b>SH</b>	Fairchild
<b>HA</b>	Harris	<b>SK</b>	RCA
<b>HEPC</b>	Motorola	<b>SL</b>	Plessey; Teledyne-Philbrick
<b>ICH</b>	Intersil	<b>SN</b>	Texas Instruments
<b>ICL</b>	Intersil	<b>SP</b>	Teledyne-Philbrick
<b>JM</b>	Fairchild	<b>SQ</b>	Teledyne-Philbrick
<b>JSF</b>	Thomson-CSF	<b>SSS</b>	Precision Monolithics
<b>L</b>	Analog Devices; SGS-ATES	<b>SU</b>	Signetics; Mullard
<b>LA</b>	Teledyne-Philbrick	<b>T</b>	Teledyne-Philbrick Transitron
<b>LF</b>	National Semiconductor	<b>TA</b>	AEG-Telefunken
<b>LH</b>	National Semiconductor	<b>TAA</b>	Proelectron Standard
<b>LM</b>	National Semiconductor	<b>TBA</b>	Proelectron Standard
<b>M</b>	Mitsubishi	<b>TBB</b>	Proelectron Standard
<b>MC</b>	Motorola Semiconductors	<b>TBC</b>	Proelectron Standard
<b>MCC</b>	Motorola Semiconductors	<b>TBE</b>	Proelectron Standard
<b>MCCF</b>	Motorola Semiconductors	<b>TCA</b>	Proelectron Standard
<b>MCE</b>	Motorola Semiconductors	<b>TDA</b>	Proelectron Standard
<b>MCH</b>	Motorola Semiconductors	<b>TDB</b>	Proelectron Standard
<b>MIC</b>	ITT Semiconductors	<b>TDC</b>	Proelectron Standard
<b>MLF</b>	Motorola; Teledyne-Philbrick	<b>TDE</b>	Proelectron Standard
<b>MLM</b>	Motorola Semiconductors	<b>TL</b>	AEG-Telefunken
<b>MLMC</b>	Motorola Semiconductors	<b>TOA</b>	Transitron
<b>MONO-OP</b>	Precision Monolithics	<b>TSC</b>	Transitron
<b>N</b>	Signetics; Mullard	<b>U</b>	Fairchild
<b>NC</b>	General Instruments (obs.)	<b>ULN</b>	Sprague
<b>NE</b>	Signetics; Mullard	<b>ULS</b>	Sprague
<b>NH</b>	National Semiconductor	<b>USL</b>	Teledyne-Philbrick
		<b>ZA</b>	Zeltex
		<b>ZEL</b>	Zeltex
		<b>ZLD</b>	Ferranti
		<b>ZN</b>	Ferranti
		<b>μA</b>	Fairchild



# Appendix E

## Tabulation Codes for Applications

<b>BDO</b>	Balanced differential-output amplifier	<b>PAA</b>	Parametric amplifier
<b>CDA</b>	Current-difference amplifier	<b>PIA</b>	Precision instrumentation amplifier
<b>CHP</b>	Chopper-stabilized amplifier	<b>PRA</b>	Programmable opamp
<b>CPR</b>	DC comparator	<b>QCD</b>	Quad current-difference amplifier
<b>DBD</b>	Dual balanced differential-output amplifier	<b>QCP</b>	Quad comparator
<b>DCP</b>	Dual Comparator	<b>QFE</b>	Quad fet-input opamp
<b>DFE</b>	Dual fet-input opamp	<b>Q GK</b>	Quad general-purpose, internally-compensated, opamp
<b>DGK</b>	Dual general purpose opamp	<b>QGU</b>	Quad general-purpose, uncompensated, opamp
<b>DGU</b>	Dual general-purpose uncompensated opamp	<b>QLQ</b>	Quad low-quiescent-power opamp
<b>DHS</b>	Dual high-slew-rate opamp	<b>QPI</b>	Quad precision instrumentation amplifier
<b>DLN</b>	Dual low-noise opamp	<b>QPR</b>	Quad programmable opamp
<b>DPI</b>	Dual precision instrumentation amplifier	<b>QSB</b>	Quad super-beta opamp
<b>DPR</b>	Dual programmable opamp	<b>SBA</b>	Super-beta opamp
<b>DSB</b>	Dual super-beta opamp	<b>TCP</b>	Triple comparator
<b>FET</b>	Fet-input opamp	<b>TFE</b>	Triple fet-input opamp
<b>GPK</b>	General-purpose, internally-compensated, opamp	<b>TGK</b>	Triple general-purpose, internally compensated, opamp
<b>GPU</b>	General-purpose, uncompensated, opamp	<b>TGU</b>	Triple general-purpose, uncompensated, opamp
<b>HCO</b>	High current output opamp	<b>TLN</b>	Triple low-noise opamp
<b>HIR</b>	High input resistance opamp	<b>TLP</b>	Triple low-quiescent-power opamp
<b>HPO</b>	High power output opamp	<b>TOT</b>	Triple operational transconductance amplifier
<b>HSR</b>	High slew rate opamp	<b>TPI</b>	Triple precision instrumentation amplifier
<b>HVO</b>	High voltage output opamp	<b>TPR</b>	Triple programmable opamp
<b>LBC</b>	Low input bias current opamp	<b>TSB</b>	Triple super-beta opamp
<b>LCD</b>	Low input offset current drift opamp	<b>VFA</b>	Voltage-follower amplifier
<b>LNA</b>	Low noise opamp	<b>WBA</b>	Wide-band opamp
<b>LOC</b>	Low input offset current opamp	<b>XHG</b>	Extra-high-gain opamp
<b>LOV</b>	Low input offset voltage opamp	<b>XLP</b>	Extra-low quiescent power opamp
<b>LQP</b>	Low quiescent power opamp	<b>XSR</b>	Extra-high slew rate opamp
<b>LVD</b>	Low input offset voltage drift opamp	<b>XWB</b>	Extra-wide-band opamp
<b>MWB</b>	Medium-wideband opamp		
<b>OTA</b>	Operational transconductance amplifier		

# Appendix G

## Codes for Leadout Connections


### *I: Connection Codes in Serial Order*

A	= Gain adjust, 1
A*	= Gain adjust, 2
B	= Bias adjust or set
C	= Case, package, screen
E+	= Input, non-inverting, low-level
E-	= Input, inverting, low-level
F	= Input frequency compensation, 1
F*	= Input frequency compensation, 2
G	= Ground, common, earth, zero volts
J+	= Input, non-inverting, high-level
J-	= Input, inverting, high-level
K	= Output, open collector
L	= Output, open emitter
M	= Metal casing
N	= Not connected, i.e. isolated lead
Q	= Special terminal (consult manufacturer's data)
R	= Output, 1
R*	= Output, 2
S	= Strobe
T	= Offset balance, trim or null, 1
T*	= Offset balance, trim or null, 2
V+	= +ve dc supply
V-	= -ve dc supply
W	= Guard ring
X	= Blank position, lead omitted
++	= +ve supplementary dc supply
--	= -ve supplementary dc supply
φ	= Output frequency compensation, 1
φ*	= Output frequency compensation, 2

### *II: Lead Assignments in Alphabetical Order*

Balance, offset, 1 = T
Balance, offset, 2 = T*
Bias adjust = B
Blank position, without lead = X
Case = C
Compensation, input, 1 = F
Compensation, input, 2 = F*
Compensation, output, 1 = φ
Compensation, output, 2 = φ*
DC supply, +ve = V+
DC supply, -ve = V-
Frequency compensation, input, 1 = F
Frequency compensation, input, 2 = F*
Frequency compensation, output, 1 = φ
Frequency compensation, output, 2 = φ*
Gain adjust, 1 = A
Gain adjust, 2 = A*
Ground = G
Guard ring = W
Input, inverting, high-level = J-
Input, non-inverting, high-level = J+
Input, inverting, low-level = E-
Input, non-inverting, low-level = E+
Input offset voltage, adjust, 1 = T
Input offset voltage, adjust, 2 = T*
Lead omitted, blank position = X
Lead in position but not connected = N
Metal case = M
Not connected, but lead in position = N
Null, offset, 1 = T
Null, offset, 2 = T*
Offset voltage adjust, 1 = T
Offset voltage adjust, 2 = T*
Output, 1 = R
Output, 2 = R*
Output, open-collector = K
Output, open-emitter = L
Package = C
Special purpose terminal (data sheet to be consulted) = Q
Strobe = S
Supply, dc, +ve = V+
Supply, dc, -ve = V-
Supply, dc, supplementary, +ve = ++
Supply, dc, supplementary, -ve = --
Trim (offset voltage), 1 = T
Trim (offset voltage), 2 = T*

Appendix F

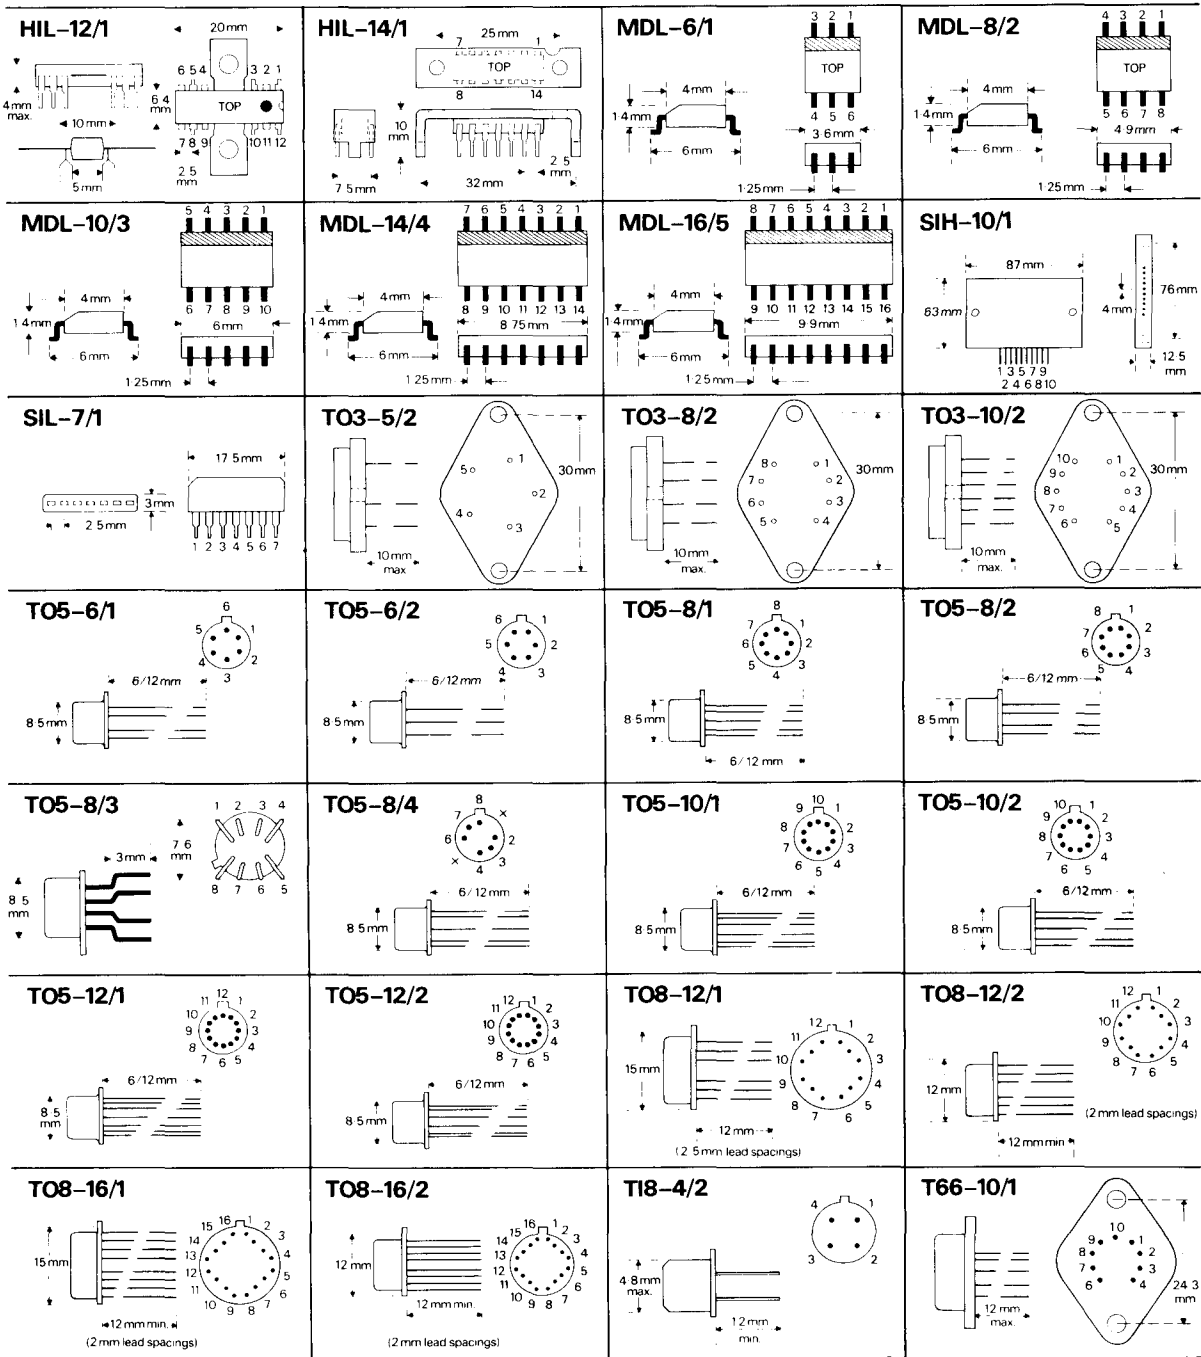

Appendix F

