

# ALPHANUMERIC INDEX — CROSS-REFERENCE

The following table represents an index and cross-reference guide for all low-frequency power transistors which are either manufactured directly by Motorola or for which Motorola manufactures a suitable equivalent. Where the Motorola part num-

ber differs from the industry part number, the Motorola device is a "form, fit and function" replacement for the industry type number — however, subtle differences in characteristics and/or specifications may exist.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number	Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
1S110A-100		MJ16018	3-782	2N3441	2N3441		3-13
2N1487		2N5877	3-120	2N3442	2N3442		3-15
2N1488		2N5878	3-120	2N3445	2N3447		3-18
2N1489		2N5877	3-120	2N3446	2N3448		3-18
2N1490		2N5878	3-120	2N3447	2N3447		3-18
2N1702		2N5877	3-120	2N3448	2N3448		3-18
2N3016		2N5337	3-97	2N3583	2N3583		3-20
2N3021		2N3789	3-56	2N3584	2N3584		3-20
2N3022		2N3789	3-56	2N3585	2N3585		3-20
2N3023		2N3789	3-56	2N3667		2N5881	3-123
2N3024		2N3791	3-56	2N3713		2N5881	3-123
2N3025		2N3791	3-56	2N3714	2N3714		3-26
2N3026		2N3791	3-56	2N3715	2N3715		3-26
2N3054	2N3054		3-2	2N3715JAN	2N3715JAN		3-26
2N3054A	2N3054A		3-2	2N3715JTX	2N3715JTX		3-26
2N3055	2N3055		3-6	2N3715JTXV	2N3715JTXV		3-26
2N3055A	2N3055A		3-9	2N3716	2N3716		3-26
2N3055H		2N3055A	3-9	2N3716JAN	2N3716JAN		3-26
2N3055H		2N5302JAN	3-93	2N3716JTX	2N3716JTX		3-26
2N3055JAN		2N3055A	3-9	2N3716JTXV	2N3716JTXV		3-26
2N3055SD							
2N3055SUB		2N3055A	3-9	2N3719	2N3719		3-32
2N3076		2N6249	3-164	2N3720	2N3720		3-32
2N3079		2N6308	3-181	2N3738	2N3738		3-37
2N3080		2N6543	3-215	2N3739	2N3739		3-37
2N3171		2N3789	3-56	2N3739JAN	2N3739JAN		3-37
2N3172		2N3789	3-56	2N3739JTX	2N3739JTX		3-37
2N3173		2N3790	3-56	2N3739JTXV	2N3739JTXV		3-37
2N3174		MJ15016	3-9	2N3740	2N3740		3-41
2N3183		2N3789	3-56	2N3740A		2N3740	3-41
2N3184		2N3789	3-56	2N3740JAN	2N3740JAN		3-41
2N3185		2N3790	3-56	2N3740JTX	2N3740JTX		3-41
2N3186		MJ15016	3-9	2N3740JTXV	2N3740JTXV		3-41
2N3195		2N3789	3-56	2N3741	2N3741		3-41
2N3196		2N3790	3-56	2N3741A	2N3741A		3-41
2N3198		MJ15016	3-9	2N3741JAN	2N3741JAN		3-41
2N3202		2N3719	3-32	2N3741JTX	2N3741JTX		3-41
2N3203		2N3720	3-32	2N3741JTXV	2N3741JTXV		3-41
2N3204		2N6303	3-32	2N3766	2N3766		3-44
2N3232		2N5877	3-120	2N3766JAN	2N3766JAN		3-44
2N3233		2N5882	3-123	2N3766JTX	2N3766JTX		3-44
2N3234		2N5760	3-116	2N3766JTXV	2N3766JTXV		3-44
2N3235		2N3055	3-6	2N3767	2N3767		3-44
2N3236		2N5882	3-123	2N3767JAN	2N3767JAN		3-44
2N3237		2N5302	3-93	2N3767JTX	2N3767JTX		3-44
2N3238		2N5882	3-123	2N3767JTXV	2N3767JTXV		3-44
2N3239		2N5882	3-123	2N3771	2N3771		3-48
2N3240		2N5882	3-123	2N3772	2N3772		3-48
2N3419		2N5336	3-97	2N3773	2N3773		3-52
2N3420		2N5336	3-97	2N3788		2N6543	3-215
2N3421		2N5336	3-97	2N3789	2N3789		3-56

**TABLE 13 — POWER SWITCHING TRANSISTORS (continued)**

I <sub>C</sub> Cont Amps Max	V <sub>CEO</sub> (sus) Volts Min	Device Type		h <sub>FE</sub> Min/Max	@ I <sub>C</sub> Amp	Resistive Switching			f <sub>T</sub> MHz Min	P <sub>D</sub> (Case) Watts @ 25°C	Case JEDEC/MOT
		NPN	PNP			t <sub>s</sub> μs Max	t <sub>f</sub> μs Max	@ I <sub>C</sub> Amp			
4	30	BD185		15 min	2				20	40	TO-225AA/77
	45	BD785	BD786	20 min	2				50	15	TO-225AA/77
	60	2N4877 BD189 BD787	BD788	20/100 15 min 20 min	4 2 2	1.5	0.5	4	30 20 50	10 40 15	TO-205AD/79 TO-225AA/77 TO-225AA/77
	80	BD789	BD790	10 min	2				40	15	TO-225AA/77
	100	BD791	BD792	10 min	2				40	15	TO-225AA/77
5	80	2N5337	2N6191	60/240	2	2	0.2	2	30	10	TO-205AD/79
	100	2N5339	2N6193	60/240	2	2	0.2	2	30	10	TO-205AD/79
7	60	2N6315	2N6317	20/100	2.5	1	0.8	2.5	4	90	TO-213AA/80
	80	2N5428 2N6316	2N6318	60/240 20/100	2 2.5	2 1	0.2 0.8	2 2.5	30 4	60 90	TO-213AA/80 TO-213AA/80
	100	2N5430		60/240	2	2	0.2	2	30	60	TO-213AA/80
7.5	60	2N3447		40/120	5	2	0.35	5	10	115	TO-204/1
	80	2N3448		40/120	5	2	0.35	5	10	115	TO-204/1
8	120	MJE15028	MJE15029	20 min	4	0.4 typ	0.18 typ	5	30	50	TO-220/221A
	150	MJE15030	MJE15031	20 min	4	0.4 typ	0.18 typ	5	30	50	TO-220/221A
10	60	2N5877	2N5875	20/100	4	1	0.8	4	4	150	TO-204/1
	80	2N5878	2N5876	20/100	4	1	0.8	4	4	150	TO-204/1
15	60	2N5881	2N5879	20/100	6	1	0.8	6	4	160	TO-204/1
	80	2N5882	2N5880	20/100	6	1	0.8	6	4	160	TO-204/1
18	160	BUX41N		8 min	12	1.2	0.25	12	8	120	TO-204/1
20	75	2N5039		20/100	10	1.5	0.5	10	60	140	TO-204/1
	80	2N5303	2N5745	15/60	10	2	1	10	2	200	TO-204/1
	90	2N5038		20/100	12	1.5	0.5	12	60	140	TO-204/1
	125	BUX40		8 min	15	1	0.25	15	8	120	TO-204/1
	160	BUV11N		10 min	15	1.2	0.25	15	8	150	TO-204/1
25	60	2N5885	2N5883	20/100	10	1	0.8	10	4	200	TO-204/1
	80	2N5886	2N5884 2N6436	20/100 30/120	10 10	1 1	0.8 0.25	10 10	4 40	200 200	TO-204/1 TO-204/1
	100	2N6338	2N6437	30/120	10	1	0.25	10	40	200	TO-204/1
	120	2N6339	2N6438	30/120	10	1	0.25	10	40	200	TO-204/1
	125	BUV10 BUV10N		10 min 10 min	20 20	1.2 1.55	0.25 0.45	20 15	8 10	150 175	TO-204/1 TO-204/1
	140	2N6340		30/120	10	1	0.25	10	40	200	TO-204/1
	150	2N6341		30/120	10	1	0.25	10	40	200	TO-204/1
30	40	2N5301	2N4398	15/60	15	2	1	10	2	200	TO-204/1
	60	2N5302	2N4399	15/60	15	2	1	10	2	200	TO-204/1
	90	BUX39		8 min	20	1	0.25	20	8	120	TO-204/1

(continued)

**HIGH-SPEED SILICON ANNULAR  
 NPN POWER TRANSISTORS**

... for switching and amplifier applications

**FEATURES**

- Fast Switching: Total Switching Time = 1.2  $\mu$ s (Typ) @ 5.0 A
- High Gain:  $h_{FE} = 40$  to 120 @ 5.0 Amps
- Guaranteed DC Safe Area: 1.5 Amps (Min) @  $V_{CE} = 40$  Vdc
- Low  $V_{CE(sat)}$ : 1.0 Volt (Typ), 1.5 Volts (Max) @ 5.0 Amps
- Excellent Beta Linearity

**APPLICATIONS**



- Specified safe area of this series allows reliable design for inverters, converters, hammer, and servo drivers.
- Fast response makes it ideal for series regulators; high switching speeds enhance its use in switching regulators.
- Wide bandwidth and flat beta hold-up result in exceptional amplifier characteristics.

**MAXIMUM RATING**

Rating	Symbol	2N3447	2N3448	Unit
Collector-Emitter Voltage	$V_{CEO}$	60	80	Vdc
Collector-Base Voltage	$V_{CB}$	80	100	Vdc
Emitter-Base Voltage	$V_{EB}$	6.0	10	Vdc
Collector Current-Continuous	$I_C$	7.5		Adc
Base Current - Continuous	$I_B$	4.0		Adc
Total Device Dissipation	$P_D$	Figure 1, 2	Figure 1, 3	Watts
Operating Junction Temperature Range	$T_J$	-65 to +200		$^{\circ}$ C

**7.5 AMPERE**  
**POWER TRANSISTORS**  
**SILICON NPN**

**60-80 VOLTS**  
**115 WATTS**

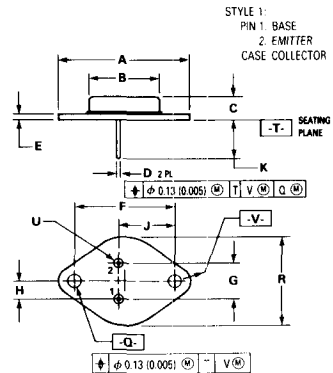


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO 204AA OUTLINE SHALL APPLY.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	8.25	0.250	0.325
D	0.97	1.09	0.038	0.043
E	1.40	1.77	0.055	0.070
F	30 15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.19	0.151	0.165
R	26.67		1.050	
U	4.83	5.33	0.190	0.210
V	3.84	4.19	0.151	0.165

**CASE 1-06**  
**TO-204AA**  
**(TO-3)**

3

**FIGURE 1 — POWER DERATING CURVE**

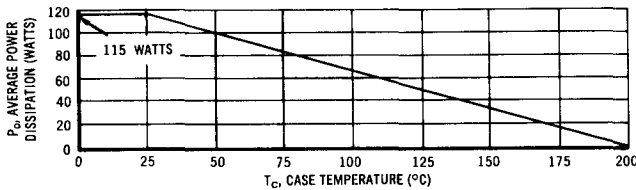

These transistors are also subject to safe area curves as indicated by Figures 2, 3. Both limits are applicable and must be observed.