

Service
Service
Service



Service Manual

Horizontal Frequency
31~60 kHz

TABLE OF CONTENTS

Description	Page	Description	Page
Table Of Contents.....	1	6.1.Main Board.....	26
Revision List.....	2	6.2.Power Board.....	28
Important Safety Notice.....	3	6.3.Key Board.....	28
1. General Specification.....	4	6.4.IR Board.....	28
2. Operating Instructions.....	5	7. Adjustment.....	30
2.1. The Use of Remote Control.....	5	8. Block Diagram.....	31
2.2. To Use The Menu.....	6	9. Schematic.....	32
2.3. How To Connect.....	12	9.1.Main Board.....	32
2.4. Front Panel Control Knobs.....	14	9.2.Power Board.....	45
3. Input/Output Specification.....	15	9.3.Key Board.....	46
4. Mechanical Instructions.....	17	10. Exploded View.....	47
5. Repair Flow Chart.....	21	11. BOM List.....	48
6. PCB Layout.....	26		

SAFETY NOTICE

ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

Revision List

Version	Release Date	Revision Instructions	TPV Model
A00	Oct-22-2008	Initial Release	E26RMZNKW9PV2N

Important Safety Notice

Proper service and repair is important to the safe, reliable operation of all AOC Company Equipment. The service procedures recommended by AOC and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It is also important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. AOC could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, AOC has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by AOC must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

Hereafter throughout this manual, AOC Company will be referred to as AOC.

WARNING

Use of substitute replacement parts, which do not have the same, specified safety characteristics might create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from AOC. AOC assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

FOR PRODUCTS CONTAINING LASER:

DANGER-Invisible laser radiations when open AVOID DIRECT EXPOSURE TO BEAM.

CAUTION-Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION -The use of optical instruments with this product will increase eye hazard.

TO ENSURE THE CONTINUED RELIABILITY OF THIS PRODUCT, USE ONLY ORIGINAL MANUFACTURER'S REPLACEMENT PARTS, WHICH ARE LISTED WITH THEIR PART NUMBERS IN THE PARTS LIST SECTION OF THIS SERVICE MANUAL.

Take care during handling the LCD module with backlight unit

-Must mount the module using mounting holes arranged in four corners.

-Do not press on the panel, edge of the frame strongly or electric shock as this will result in damage to the screen.

-Do not scratch or press on the panel with any sharp objects, such as pencil or pen as this may result in damage to the panel.

-Protect the module from the ESD as it may damage the electronic circuit (C-MOS).

-Make certain that treatment person's body is grounded through wristband.

-Do not leave the module in high temperature and in areas of high humidity for a long time.

-Avoid contact with water as it may a short circuit within the module.

-If the surface of panel becomes dirty, please wipe it off with a soft material. (Cleaning with a dirty or rough cloth may damage the panel.)

1. General Specification

Items		Specification	
LCD Panel	Panel Type	V260B1-L11 26" CMO TW	
	Driving system	TFT-LCD CMO Panel	
	Active Area	575.769(H) x 323.712(V)	
	Resolutions	1366 x768	
	Brightness	500 cd/m ²	
	Contrast	800:1	
	Pixel Pitch	0.1405mm x0.4215mm	
	Display colors	16.2 million	
	Color Temperature	Cool / Warm/normal	
Television System	TV Standard	NTSC standard ATSC standard (8-VSB, Clear-QAM)	
Video Inputs	AV	RCA x 1	Audio L/R x 1
	S-Video	S-Video x 1	
	COMPONENT	Y,Cb,Cr x 1	Audio channel L / Rx 1
	HDMI	720p,1080i,480p,480i	
	PC	VGA x 1	PC Audio in x 1
Audio Output	Audio Output: L / R	Speaker (built-in): Two 11W speakers	
		SPDIF	
OSD language	English, etc		
Wall Mount	VESA 200 mm x 100 mm		
Dimensions	651.9mm(W) x 481.4mm(H) x 219.5mm(L)		
Weight	6.3KG		
Power	Power Supply	AC100V~240V, 50/60Hz	
	Power Consumption	< 120W 1 W in standby mode (power cord plugged in and power OFF)	
Environment	Operating	0 °C ~ 40 °C	
	Storage	-10 °C ~ 50 °C	
	Operating	10% ~ 85%	

2. Operating Instructions

2.1 The Use of Remote Control

POWER

Press to power ON/OFF (standby) the TV.

Press to turn TV ON after the power on status and the LED has changed to the red color and stopped flashing.)Note: the TV is never completely powered off unless it is physically unplugged.

VIDEO

Press to choose S-Video/ Composite mode.

COMP

Press to choose Component mode.

PC/HDMI

Press repeatedly to choose either VGA or HDMI mode.

TV

Press to choose ATSC/NTSC TV mode.

0 ~ 9 /- number

Press to enter TV channel number to select channel (Press '-' to choose the sub-channel).

SLEEP

Allows you to set a time period after which the TV will enter Standby mode (off/5 min /10 min /15 min /30 min/45 min /60 min/90 min/120 min /180 min /240 min).

FREEZE

Press to freeze the displayed picture.

CH-/ CH +

Press + or - to browse through the TV channels.


MENU

Press to open / exit OSD menu.

Use the "<",">","^","v","ENTER" Keys to adjust the various function items in the menu.

PREV CH

Press to display the previous channel

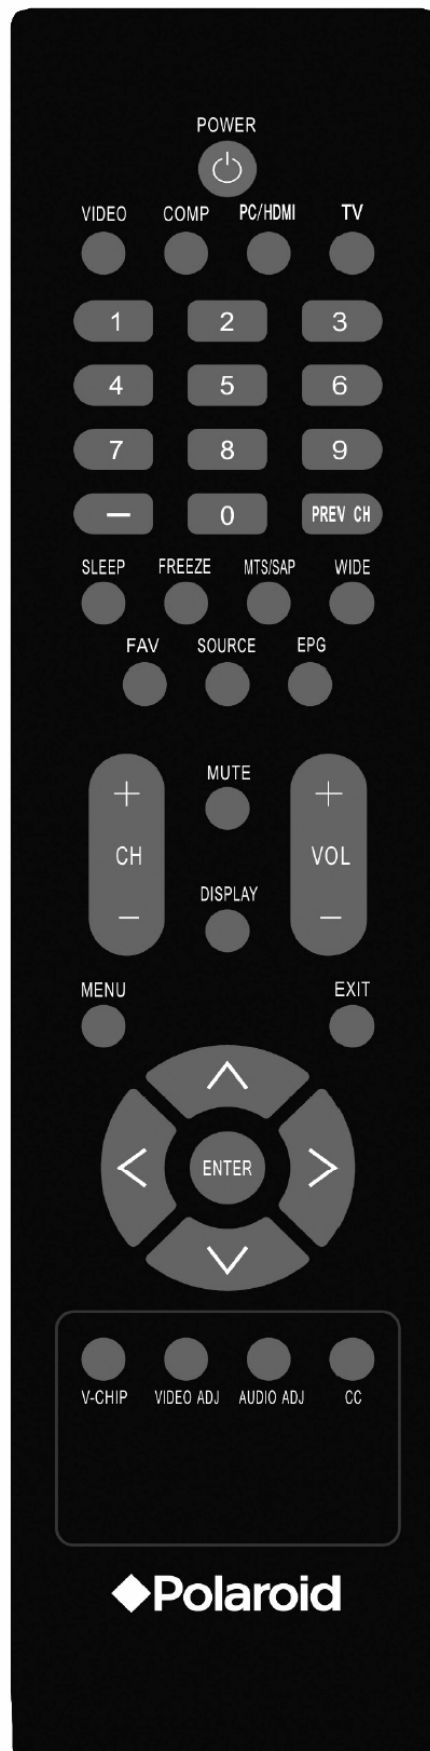

MTS/SAP

Press to activate various audio modes, such as: Stereo, SAP or Mono tone, and languages of DTV.

WIDE

Press to choose the TV's aspect ratio as: Normal, Wide, Zoom or Cinema mode.

SOURCE

Press repeatedly to choose from the various input sources.

EPG

This function is not available.

MUTE

Switch the sound ON/OFF

DISPLAY

Press to show the information about the input source,TV channel,display resolution and current time.

VOL- /VOL+

Press + or - to adjust the volume.

Exit

Press to exit menu or OSD.

V-CHIP

Press to lock / unlock Parental Control temporarily. (After setting the restricted table of MPAA or TV Rating.)

VIDEO ADJ

Press to choose the Brightness or Contrast adjustment.

AUDIO ADJ

Press to choose Bass or Treble.

CC

Press repeatedly to change the closed caption type as CC ON/ CC OFF/CC ON WHEN MUTE.

FAVORITE

Press to toggle the Favorite/ Normal channel mode.


2.2 To Use the Menu

- 1 Press the **MENU** button to display the main menu.
- 2 Press the ∇ or \triangle button repeatedly to select a menu item.
- 3 Press the $<$ or $>$ buttons to enter a sub-menu.
- 4 Press the **ENTER** or $>$ button to enter/display the function.
- 5 Press **MENU** or **EXIT** to exit the menu.


Press the Menu button to enter the main OSD (On Screen Display). Adjust the items including **Setup** menu, **Video** menu, **Audio** menu and **Feature** menu. However, some function items of the menus are only available with specific inputs/source.

SETUP MENU

The Setup menu in TV mode shows as below. In others source modes, the **Setup** menu only shows **Menu Language** and **Aspect Ratio** items.

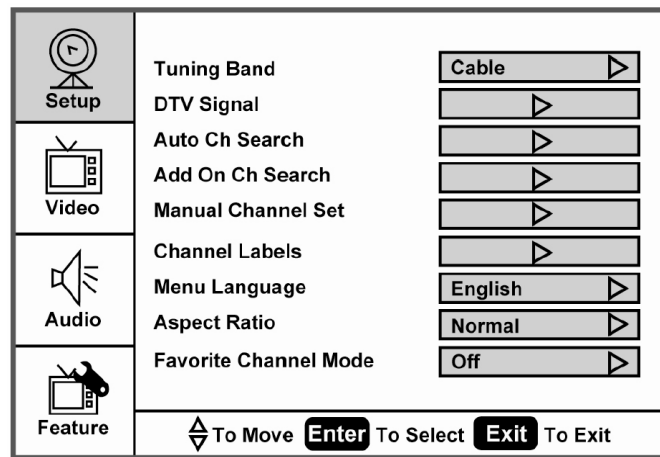


1. **Tuning Band:** Select TV source signal from the Air (antenna) or Cable (CATV).
2. **DTV Signal:** Show the intensity of the received DTV signal.

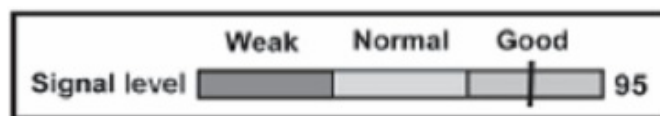

3. **Auto Ch Search:** Automatically scan all NTSC / ATSC TV channels and then store in the channel table. In channel scan process, the OSD can display the number of channels which had been found.
4. **Add on Ch search:** Add channels which are new found.
5. **Manual Channel Set:** Show the channel setup table. User can choose to display the ATSC or NTSC TV channels and then edit the channel (Viewable or Not Viewable by pressing Enter button). User won't be able to view the channel that has been set to Not Viewable when toggling through channels. However, the channels are still accessible when user enters the channel number.
6. **Channel Labels:** Show the NTSC / ATSC TV channel label menu for user modifying channel labels specifically.
7. **Menu Language:** Select the menu display language. (English / Espanol / Francais)
8. **Aspect Ratio:** Select the display aspect ratio. (Normal/Zoom/Wide/Cinema)
9. **Favorite Channel Mode:** When favorite channel mode is on, user can edit favorite channel table in favorite channel set option.

VIDEO MENU


The Video menu in most source modes shows as below. It provides several video adjustment items for user fine tuning the video display. Only in VGA source modes, the Video menu simply provides **Contrast**, **Brightness**, **Back light** and **Settings (Preset)** items.

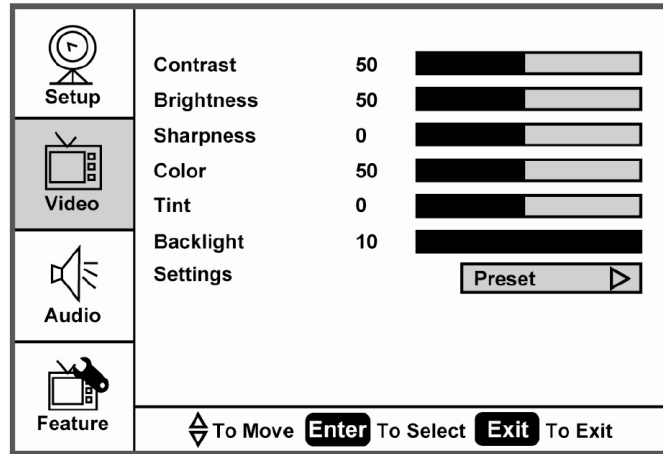

1. **Contrast:** Video contrast adjustment, the tuning range is 0 ~ 100.
2. **Brightness:** Video brightness adjustment, the tuning range is 0 ~ 100.
3. **Sharpness:** Video sharpness adjustment, the tuning range is -50 ~ 50.
4. **Color:** Video color chroma adjustment, the tuning range is 0 ~ 100.
5. **Tint:** Video tint adjustment, the tuning range is R50 ~ G50.
6. **Backlight:** Backlight strength adjustment, the tuning range is 0 ~ 10.
7. **Settings:** Restore the default video settings.

AUDIO MENU

The Audio menu in TV mode shows as below. It provides audio adjustment for user to modify the audio setting. Audio language setting is only available with ATSC TV source, the option is disable under other source modes.

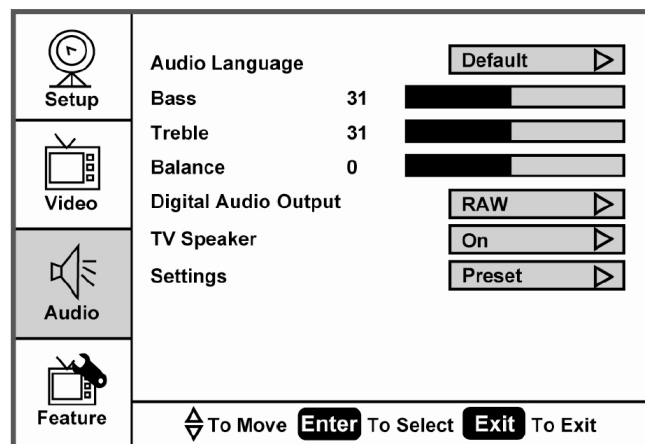


1. **Audio Language:** Change the audio language setting on ATSC TV programs .The number of the supported audio languages depends on the ATSC TV programs.
2. **Bass:** Bass tone adjustment, the tuning range is 0 ~ 63.
3. **Treble:** Treble tone adjustment, the tuning range is 0 ~ 63.
4. **Balance:** Audio balance adjustment, the tuning range is L31 ~ R31.
5. **Digital Audio Output:** Digital audio output format selection, user can choose RAW (default) or PCM format or off.

6. **TV Speaker:** Choose to turn on / off the TV internal speaker. The digital audio output signals \ earphone output signals will not be turn-off even though the TV speaker is off. The default setting is on.


7. **Settings:** Restore the default audio settings.

FEATURE MENU

The Feature menu in TV mode shows as below. It provides certain optional control functions such as time set, sleep timer, advanced video menu, Password Set, parental control (V-chip) and Digital closed caption setting. This menu gives users the most flexibilities to satisfy their generally demands. According to the various requirements in different source modes, certain features should be hidden (disable) on the menu. The details footnotes will be described clearly below.

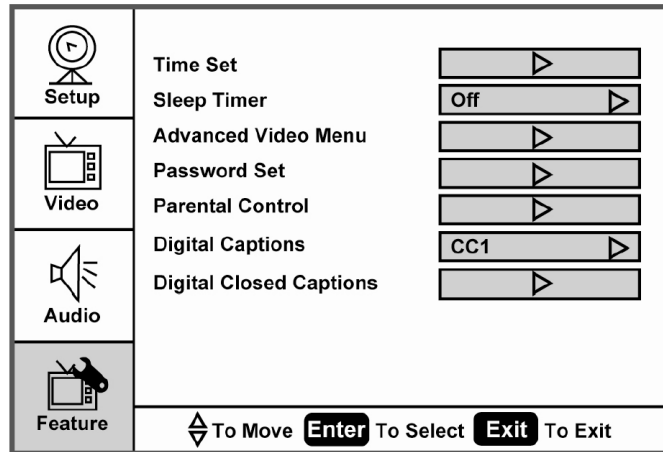

1. **Time Set:** Set the current time. This sub-menu includes Time Set Mode, Time **Zone** and **Time** items. 【Time Set Mode】 user can choose Auto or Manual, 【Time Zone】 item provides user to set current time zone, such as: Pacific, Alaska, Hawaii, Eastern, Central and Mountain. 【Time】 item provides user to set the time clock.

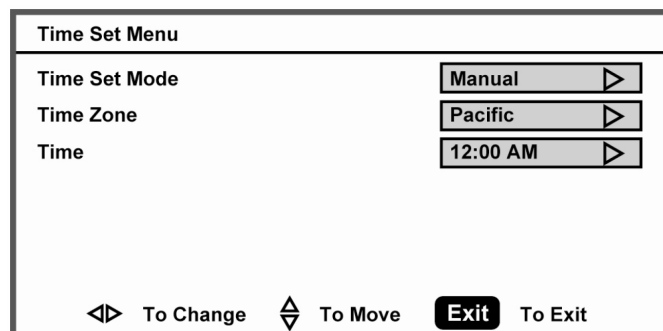

2. **Sleep Timer:** Enable or disable the TV standby timer. User can set the TV standby timer as off / 5 min / 10 min / 15 min/ 30 min / 45 min / 60 min/ 90 min / 120 min / 180min/ 240min.

3. **Advanced Video Menu:** Provide the Noise Reduction \Color Temperature and 3D Y/C. Dynamic Contrast options for enhancing video quality.

【Noise Reduction】 gives four NR effect degrees, such as: Low, Mid, High and Off. The default setting is Mid.

【Colour Temp】 gives three color temperature modes as: Normal \ Warm and Cool.

【3D Y/C】 provides On / Off switches. The default setting is On.

【 Dynamic Contrast】 user can choose On or Off.

【Setting】 restores the default advanced video option settings.

4. **Password Set:** Change the 4-numeral parental control password. Three steps are required for changing the password: Enter Old Password -> Enter New Password -> Confirm New Password. Note: This item is only available in TV, Composite and S-Video source modes. The default password is 『0 0 0 0』.

Enter Old Password

Enter New Password

Confirm New Password

5. **Parental Control:** provide the parental Control (V-chip) function setting. Before entering the Parental Control sub-menu, user has to key in the password first. Then enter the Parental Lock item, User can modify the restricted table about MPAA or TV Rating respectively. While exiting the sub-menu, the parental control function is working. The inhibitive channels or source signals can be un-lock through pressing the V-CHIP key on the remote control and then key in the correct password. Note: This feature is only available in TV, Composite and S-Video source modes. (The default password is: 0 0 0 0.)

Enter Password

Parental Control Menu

USA Parental Locks ▶

Canadian Parental Locks ▶

⬅ To Move **Enter** To Select **Exit** To Exit

USA Parental Locks


MPAA		TV RATING						
		ALL	FV	L	S	V	D	
NONE	<input type="checkbox"/>	NONE	<input type="checkbox"/>					
G	<input type="checkbox"/>	TV-Y	<input type="checkbox"/>					
PG	<input type="checkbox"/>	TV-Y7	<input type="checkbox"/>	<input type="checkbox"/>				
PG-13	<input type="checkbox"/>	TV-G	<input type="checkbox"/>					
R	<input type="checkbox"/>	TV-PG	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
NC-17	<input type="checkbox"/>	TV-14	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
X	<input type="checkbox"/>	TV-MA	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

⬅ To Move **Enter** To Select **Exit** To Exit

6. **Digital Captions:** Select the close caption options (Service 1-6, Text 1-4 and CC 1-4) in digital TV mode. When select service 1 to service 6, you can modulate parameters in the Digital Close Caption.

7. **Digital Close Caption:** Provide numerous options for setting the digital close caption style. In the sub-menu **【Style】** item can be set as Automatic or Custom mode. If Custom mode is selected, user can modify the detail styles described below. The setting result will be shown immediately on the bottom side of the sub-menu OSD.

Note: This feature is only available in Digital TV (ATSC) mode.

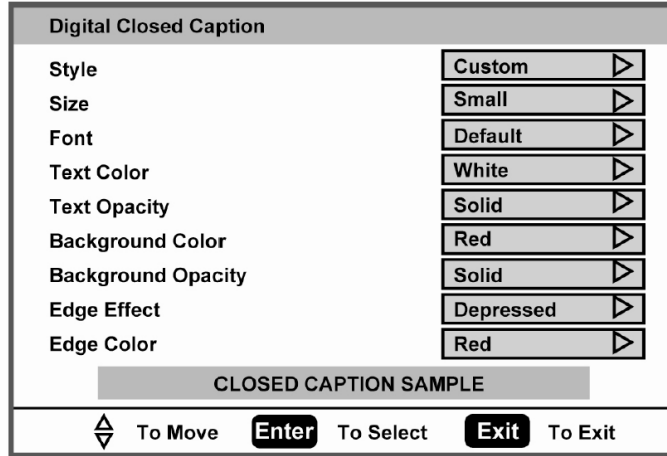

【Size】 : Digital close caption font size, which can be set as Small 、 Normal or Large.

【Font】 : Digital close caption font style, which can be chosen as Default or Font 1 ~ 7.

【Text Color】 : Giving Red / Green / Blue/ Yellow / Magenta / Cyan / Black / White Colors.

【Text Opacity】 : Giving Transparent / Translucent / Solid / Flashing modes.


【Background Color】 : Giving Red / Green / Blue / Yellow / Magenta / Cyan / Black / White Colors.

【Background Opacity】 : Giving Transparent / Translucent / Solid /Flashing modes.

【Edge Effect】 : The text edge effects, which gives None / Raised /Depressed / Uniform / Left Shadow / Right Shadow modes.

【Edge Color】 : The colors of text edge effects, which provides Red /Green / Blue / Yellow / Magenta / Cyan / Black / White Colors.



8. **Component Set:** This option only shows and is available in component mode, which provides fine tuning component display, such as: **【H-Position】** **【V-Position】**, **【Clock】**and**【Phase】**(Auto Adjust function is not supported under Component mode). All these items are giving the tuning range from 0 to 100. **【Setting】** item provides the default component setting values restoring.

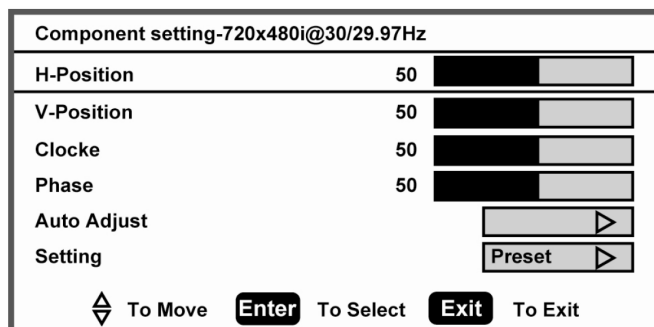

9. **VGA Set:** This option only shows and is available in VGA mode, which provides several items for the VGA display fine tuning, such as : **【H Position】** 、 **【V-Position】** 、 **【Clock】**, **【Phase】**, and **【Auto Adjust】** .All these items giving the tuning range from 0 to 100. **【Setting】** item provides the default VGA setting values restoring.

VGA setting - 1360x768x60		
H-Position	50	
V-Position	50	
Clocke	50	
Phase	50	
Auto adjust		
Setting		

To Move **Enter** To Select **Exit** To Exit

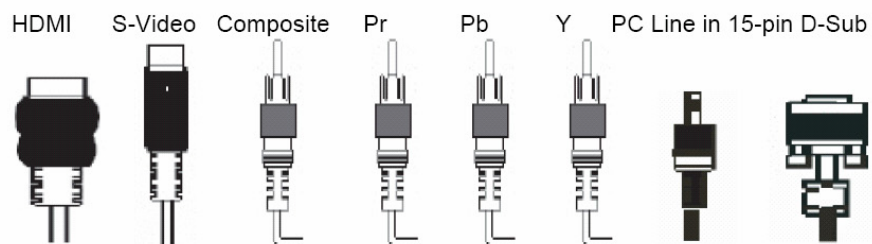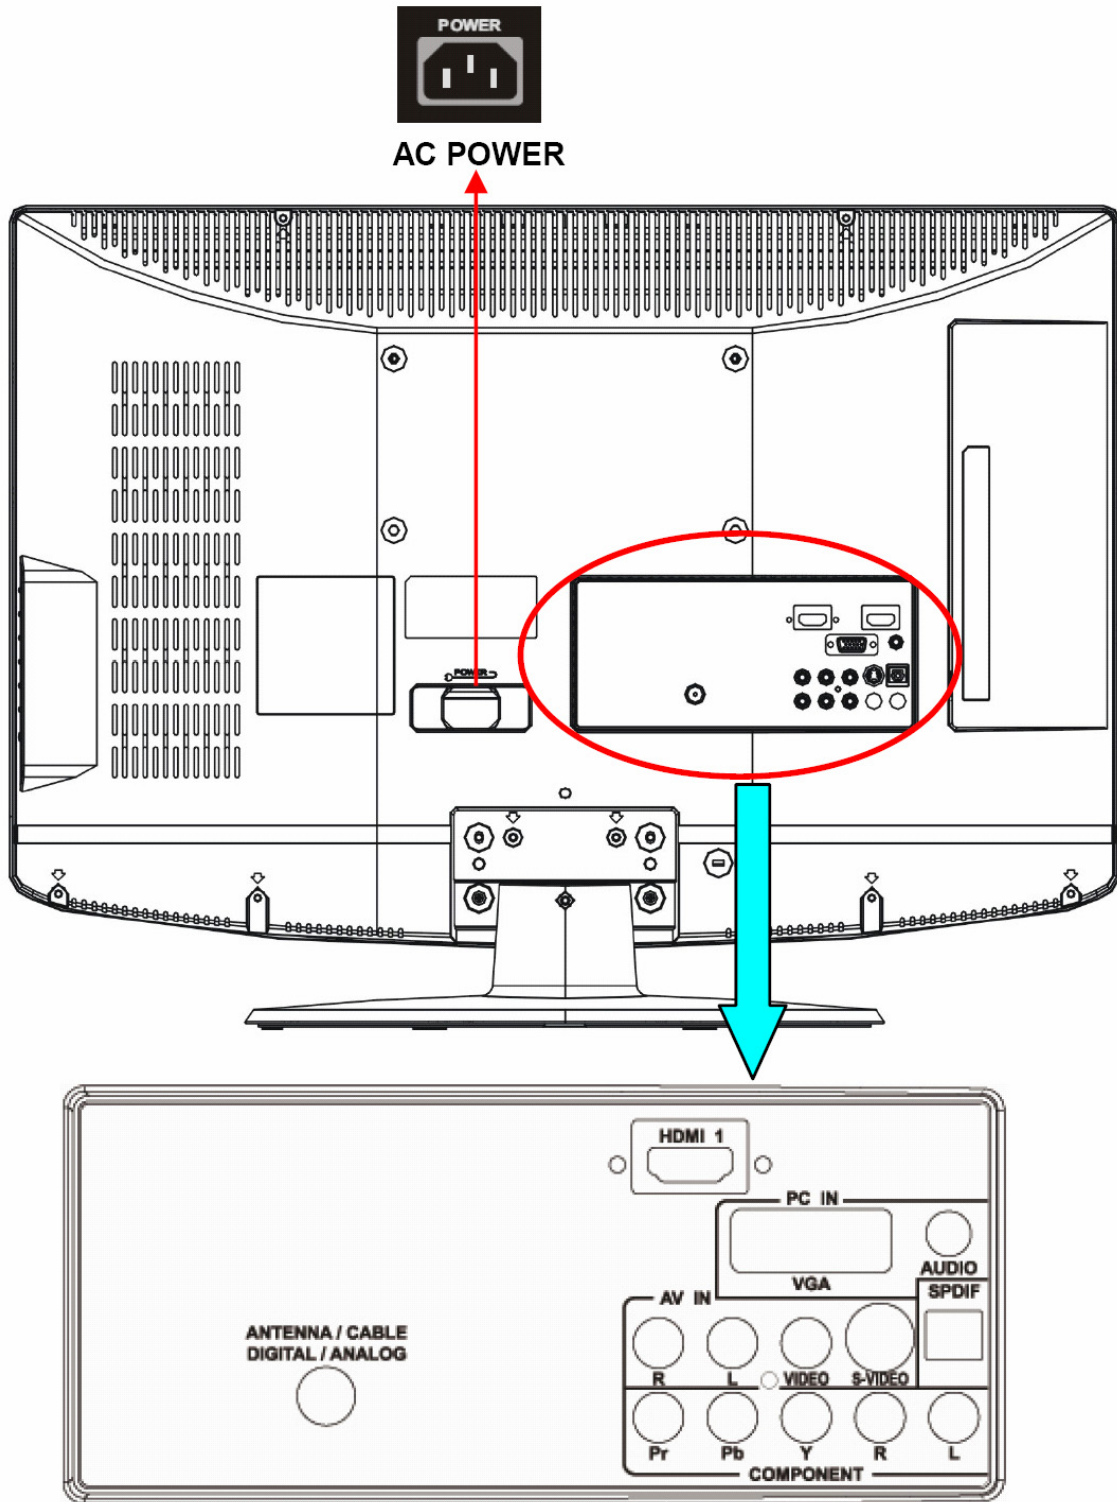


1. **HDMI** – Connect the primary source for digital video such as a DVD multimedia player or set top box through this all digital connector. The white color band on the rear of the TV indicates this connection.
2. **RGB PC** – Connect the video and audio cables from a computer here.
3. **AV/S-VIDEO IN** – Connect the primary source for composite video devices, such as a VCR or video game. Use the white and red connectors to connect the external audio from the same source. The signal being carried by the S-Video cable and connector, if connected, will take priority over the Video RCA connector (yellow connector).
4. **COMPONENT (YPb/CbPr/Cr with Audio L/R)** – Connect the primary source for component video devices such as a DVD Player or set top box here. From left to right, use red for Pr, blue for Pb, green for Y, red for right audio (R) and white for left audio (L) inputs.
5. **DTV** – Connect to an antenna or digital cable (out-of-the-wall, not from Cable Box) for Digital TV.*
6. **SPDIF (Optical Digital Audio Out)** - When a digital audio signal is associated with the input selected for viewing, the digital audio will be available on this SPDIF connection to your home theater system.

Once your equipment is connected, use the following procedure to view the input signal:

Press the source button on the remote controller to select the relevant source to view. (Ex: Press VIDEO button to select "Composite Rear" if you have connected a video recorder to Composite Rear socket.)

2.4 Front Panel Control Knobs

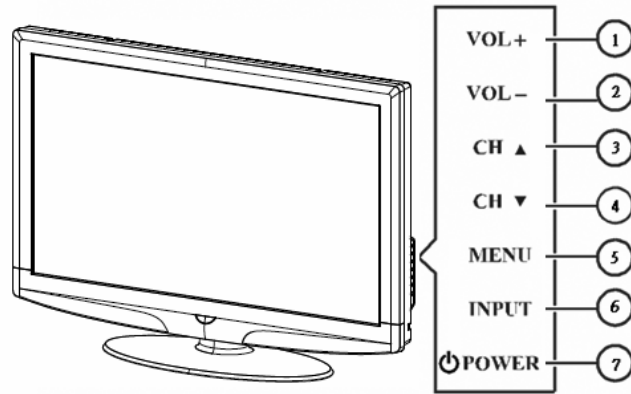

1	VOL +	VOL +: Press to increase the sound volume level.
2	VOL -	VOL - : Press to decrease the sound volume level.
3	CH ▲	CH +: Press to select the next higher channel
4	CH ▼	CH - : Press to select the next lower channel.
5	MENU	Menu key: Press to open or exit the OSD menu.
6	INPUT	Source key: Press to select the input source.
7	POWER	Power key: Press to turn on / off (standby) the TV set. (Please re-turn on TV after the Power-ON status LED had changed to the Red color and finished flashing.)

3. Input/Output Specification


3.1 RGB Signal input



15 - Pin Color Display Signal Cable

Pin – Assignment of 15-pin D-sub:			
1	Red Video	9	No Pin!
2	Green Video	10	Sync Ground
3	Blue Video	11	SDA(Remote Control)
4	SCL(Remote Control)	12	Serial Data for DDC
5	Ground	13	H-Sync.
6	Red Ground	14	V-Sync.
7	Green Ground	15	Serial Clock for DDC
8	Blue Ground		

3.2 HDMI Digital connector pin assignments

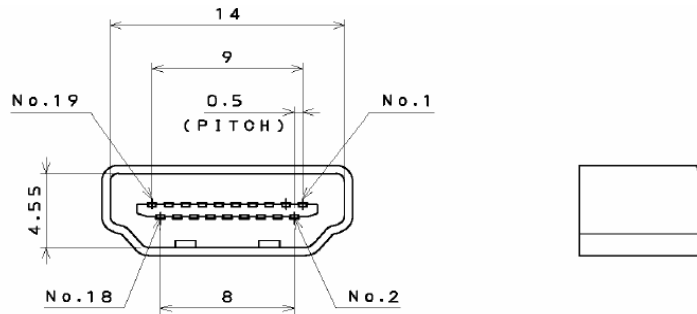

Pin No.	Description	Pin No.	Description
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	NC
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		

3.3 AV/S-Video/Component Video Inputs

AV Signal Performance		
Video / S-Video / Component Video Input		
All tests must be performed under "video standard testing conditions" unless otherwise specified		
Video1		
(Composite Video input)		
	System	NTSC
	Amplitude	1.0 V(p-p), negative sync.
	Impedance	75 ohm terminated
Video2 (Y / C input)		
(S-Video input)		
	System	NTSC
	Y signal amplitude	1.0Vpp (including sync)
	C signal amplitude	0.286Vpp
	Impedance	75 ohm terminated
Video3		
Component (Y, Pb/Cb, Pr/Cr input)		
	System	1080i, 480p, 720p, 480i
	Y signal amplitude	1.0Vpp (including sync)
	Cr, (R-Y) / Cb, (B-Y) Signal amplitude	±0.35Vpp, 75 ohm
	Impedance	75 ohm terminated
$Y = 0.299R + 0.587G + 0.114B$ $(R-Y) = 0.701R + 0.587G + 0.114B$ $(B-Y) = 0.299R + 0.587G + 0.886B$		

3.4 Compatible Mode Table


VESA MODES							
Mode	Resolution	Total	Horizontal		Vertical		Nominal Pixel Clock (MHz)
			Nominal Frequency (KHz)	Sync Polarity	Nominal Freq. (Hz)	Sync Polarity	
VGA	640x480@60Hz	800 x 525	31.469	N	59.940	N	25.175
	640x480@72Hz	832 x 520	37.861	N	72.809	N	31.500
	640x480@75Hz	840 x 500	37.5	N	75	N	31.500
SVGA	800x600@56Hz	1024 x 625	35.156	P	56.25	P	36.000
	800x600@60Hz	1056 x 628	37.879	P	60.317	P	40.000
	800x600@72Hz	1040 x 666	48.097	P	72.188	P	40.000
	800x600@75Hz	1056 x 625	46.875	P	75	P	49.5
XGA	1024x768@60Hz	1344x806	48.363	N	60.004	N	65.000
	1024x768@70Hz	1328x806	56.476	N	70.069	N	75.000
	1024x768@75Hz	1312x800	60.023	P	75.029	P	78.750
WXGA	1360x768@60Hz	1792x795	47.712	P	60.015	P	85.5

4. Mechanical Instructions


1. Remove the 3 screws to remove the base.




2. Remove 11 screws to remove the rear cover.

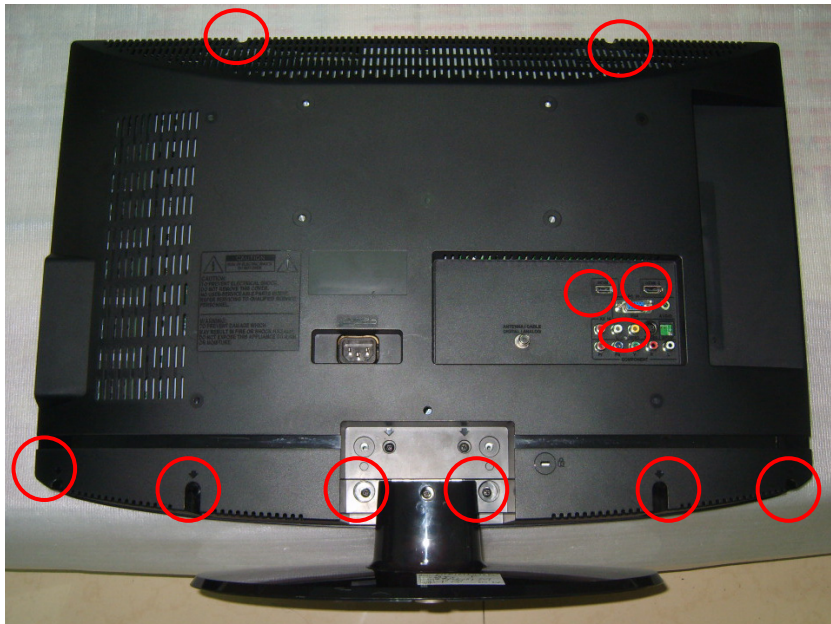


3. Remove the screws to remove the BKT-vesa.

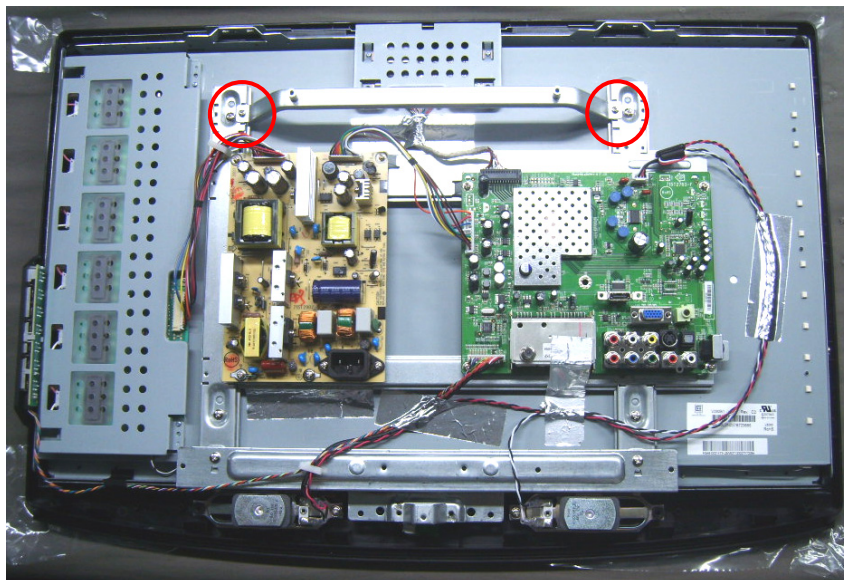


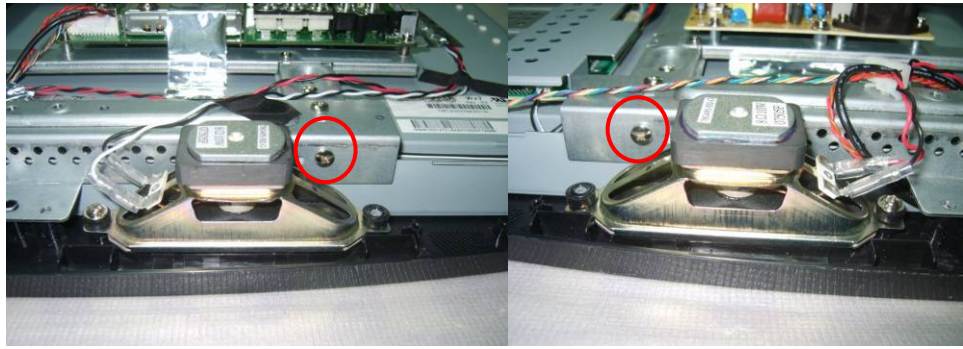


4. Release the connectors.

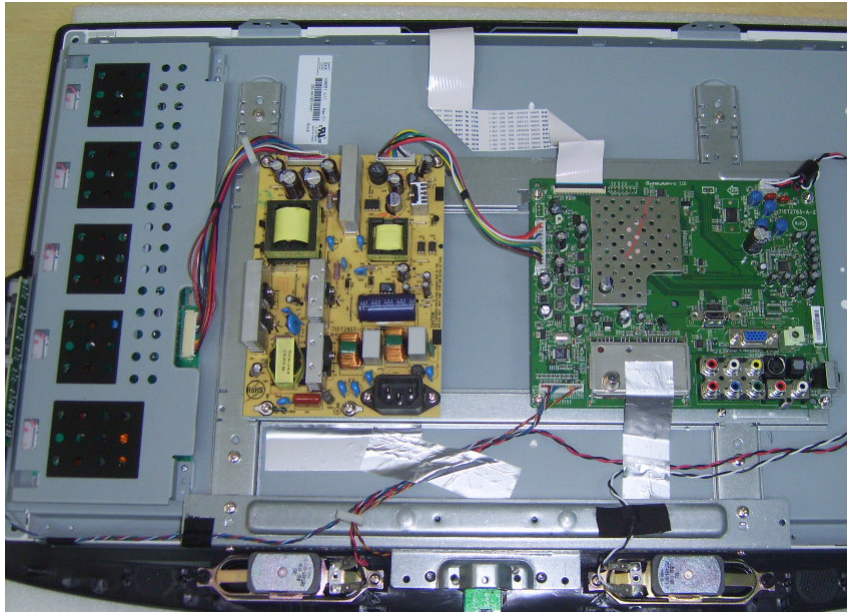


5. Remove the speakers.

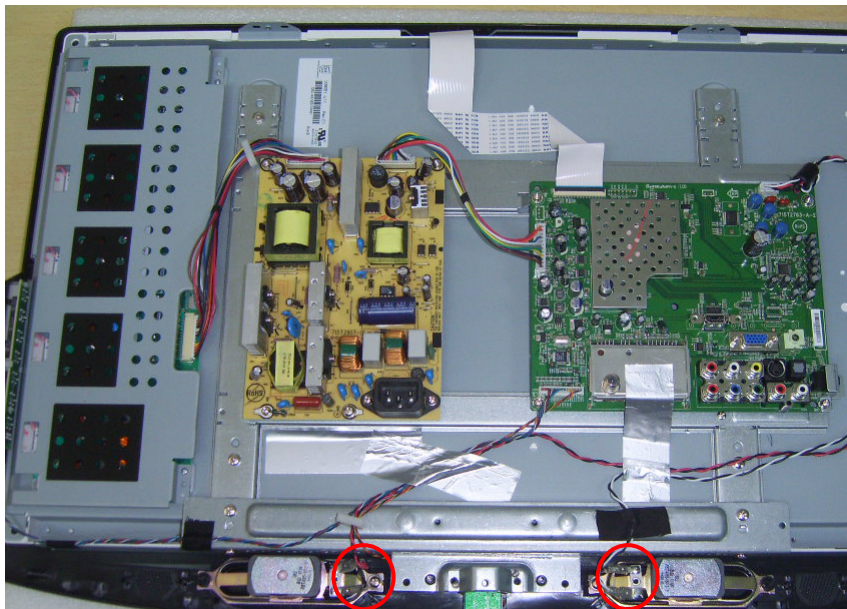


6. Remove the main board, power board

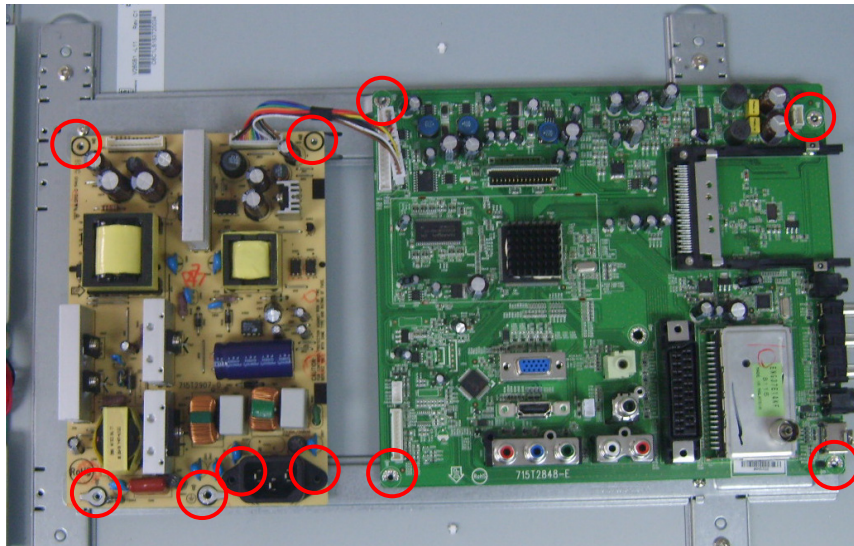


7. Remove the BKT-PCB-holder.

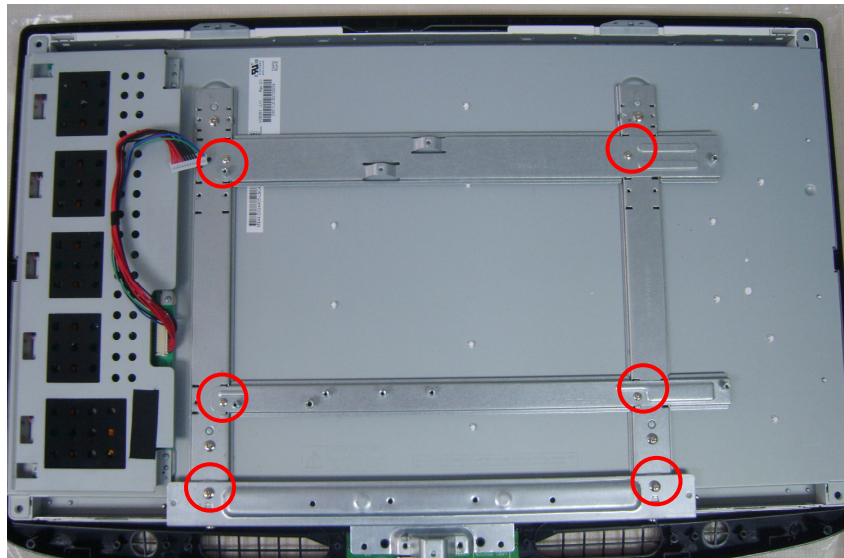

8. Release the key board and IR board.

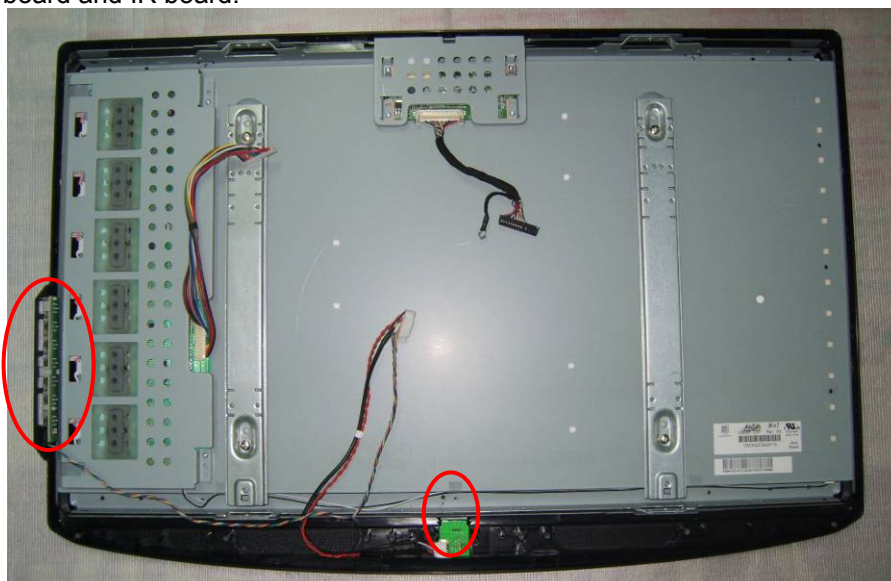

9. Remove the BKT-panel-support.

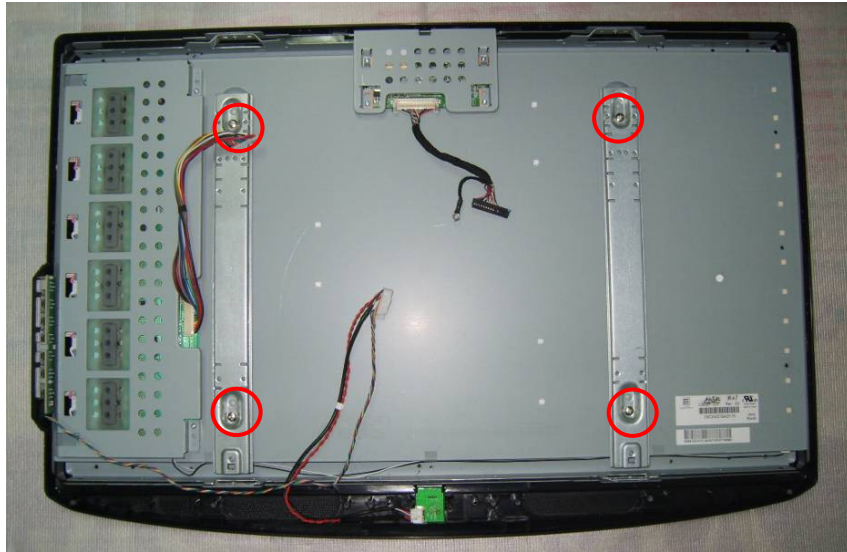

10. Remove the bezel.




11. Remove the 4 screws to release the panel.




5. Repair Flow Chart


5.1. No Power (No LED indicator)

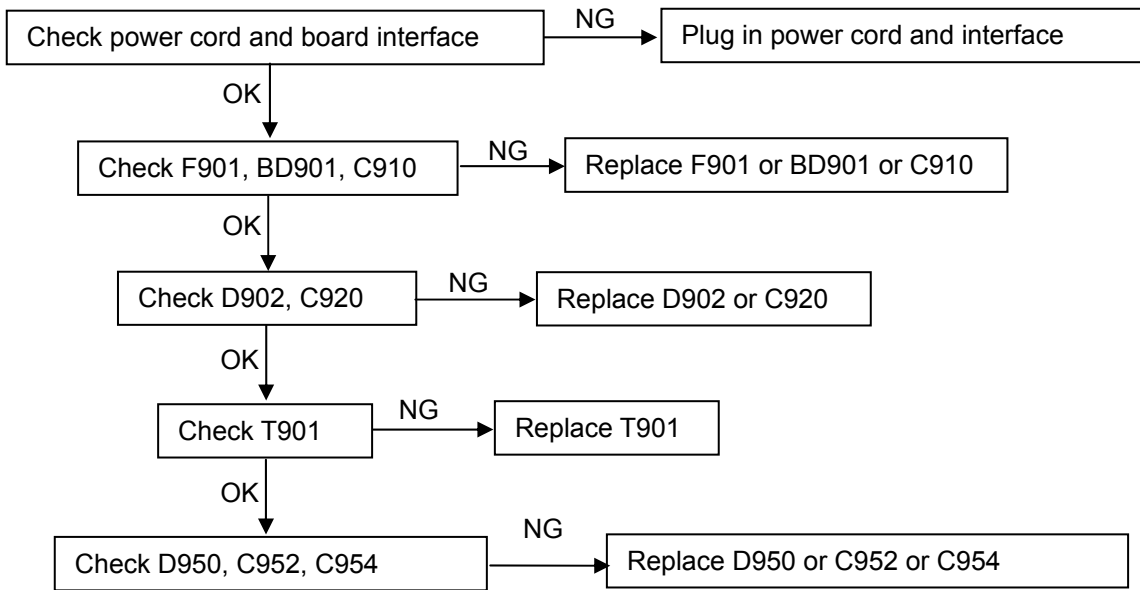


5.2. Can not start (LED indicator yellow)

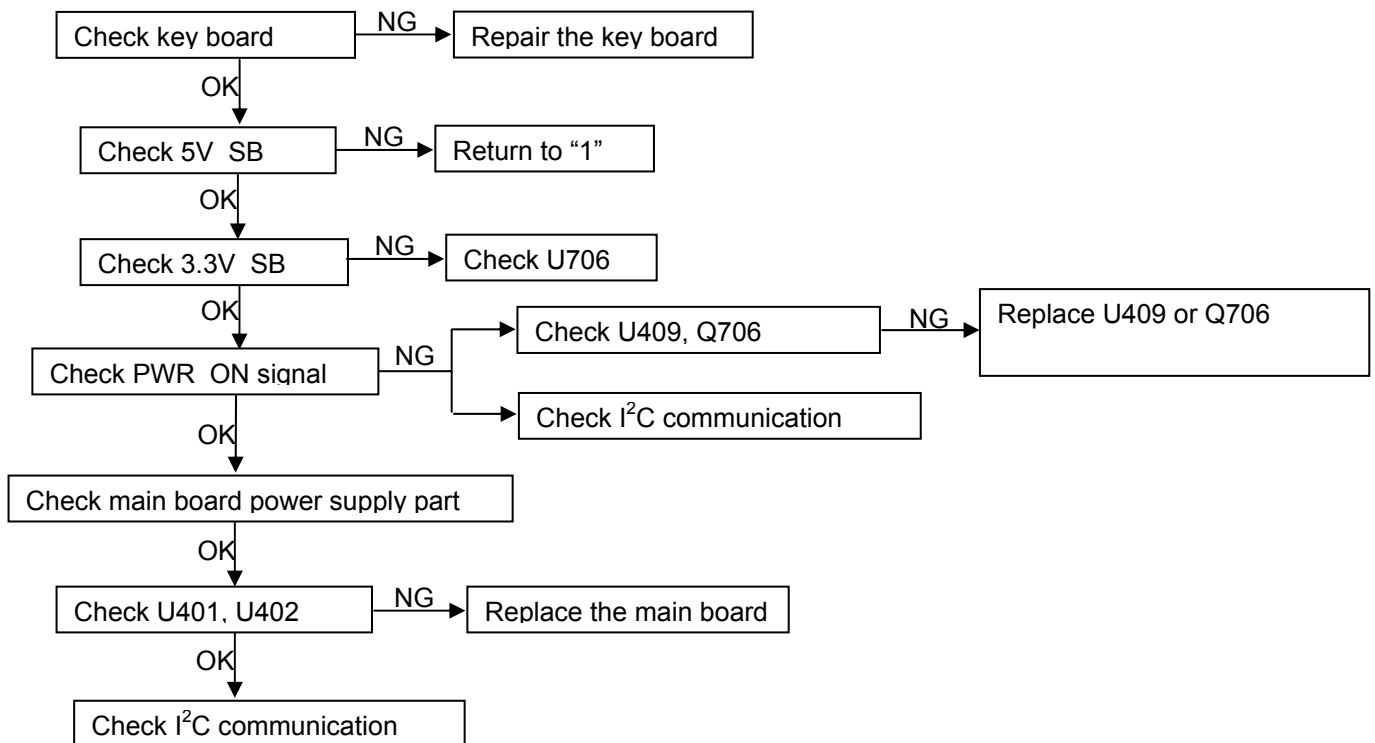


5.3. No display (LED indicator green)

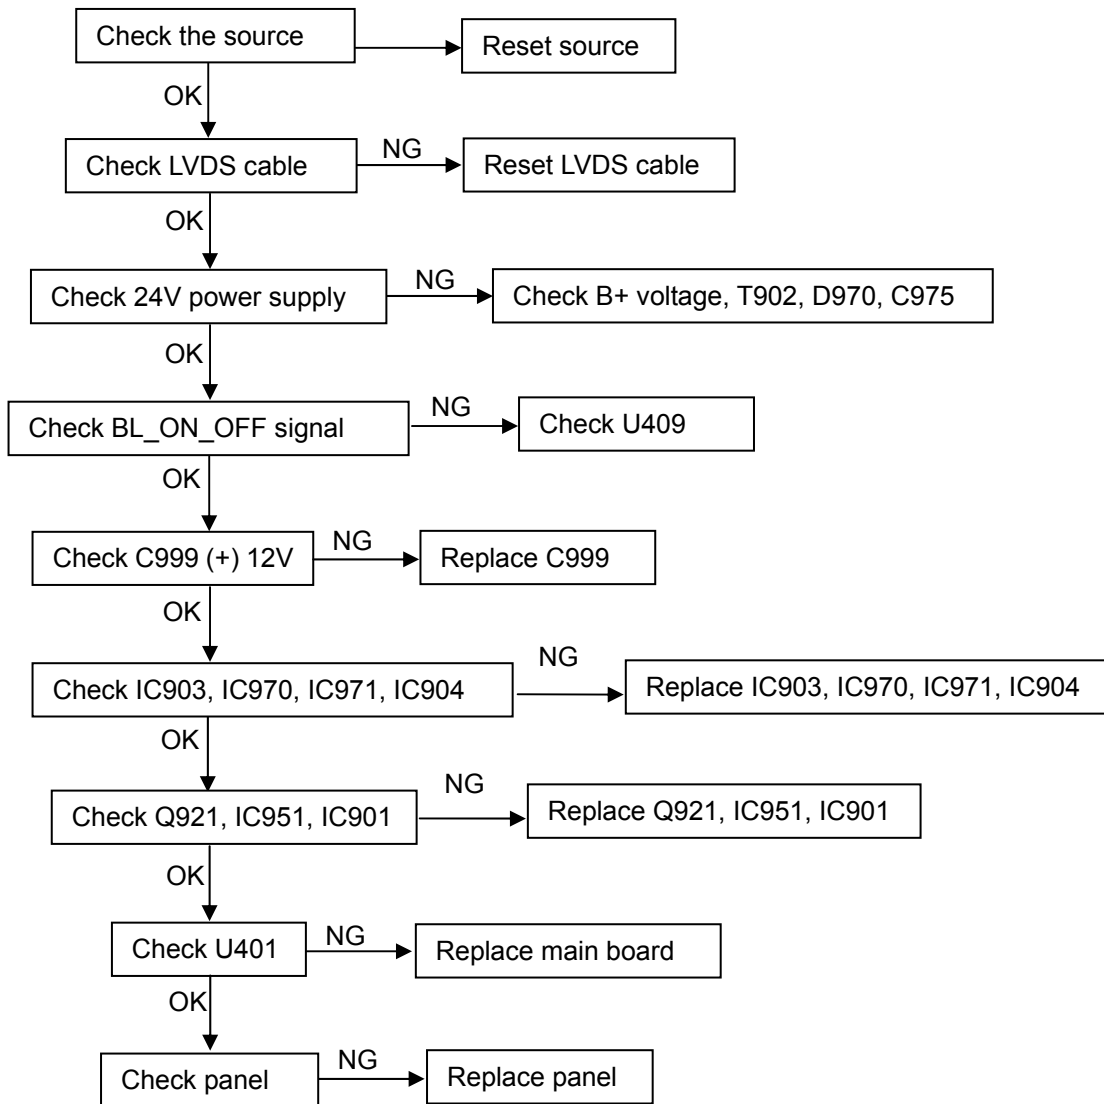


5.4. Abnormal display

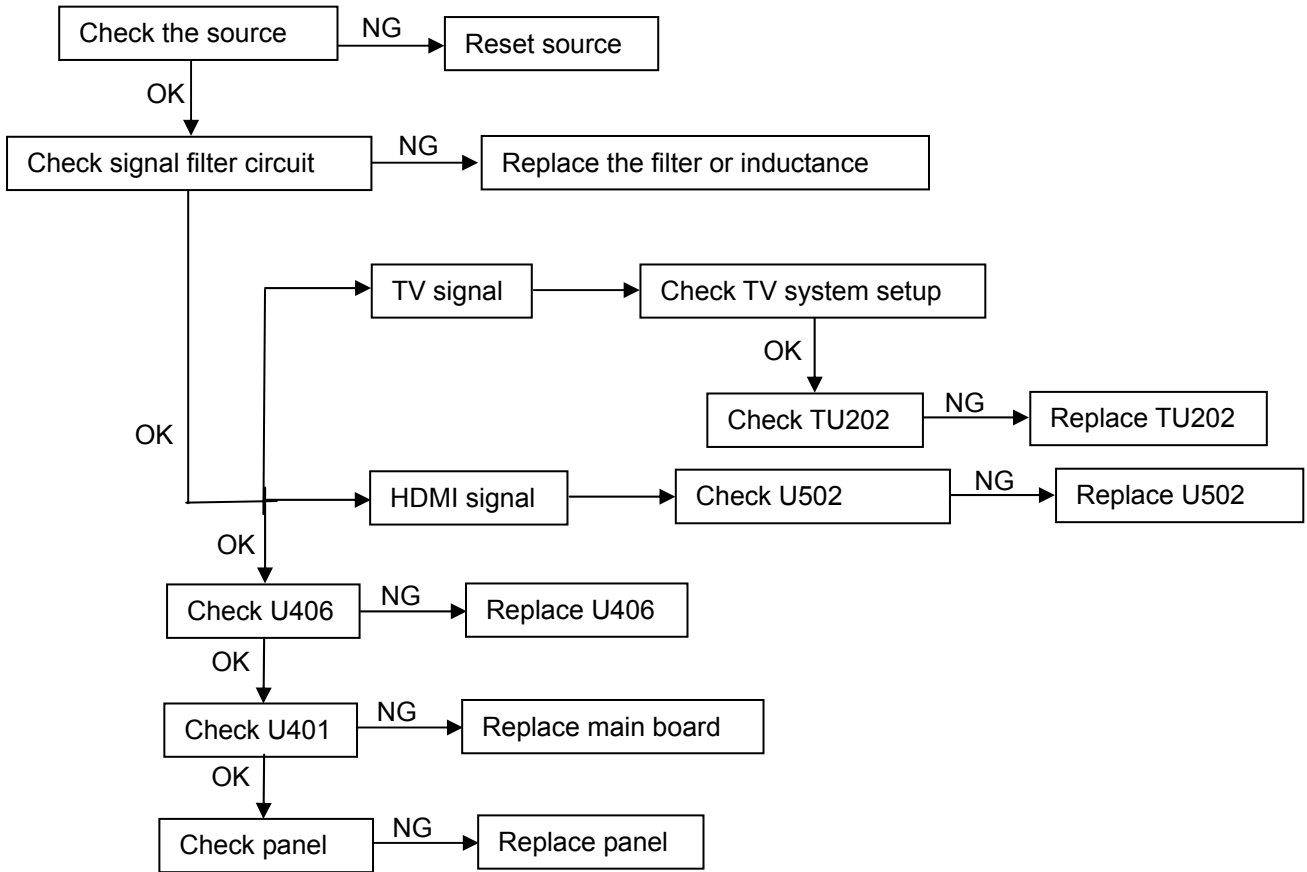

5.5. No sound


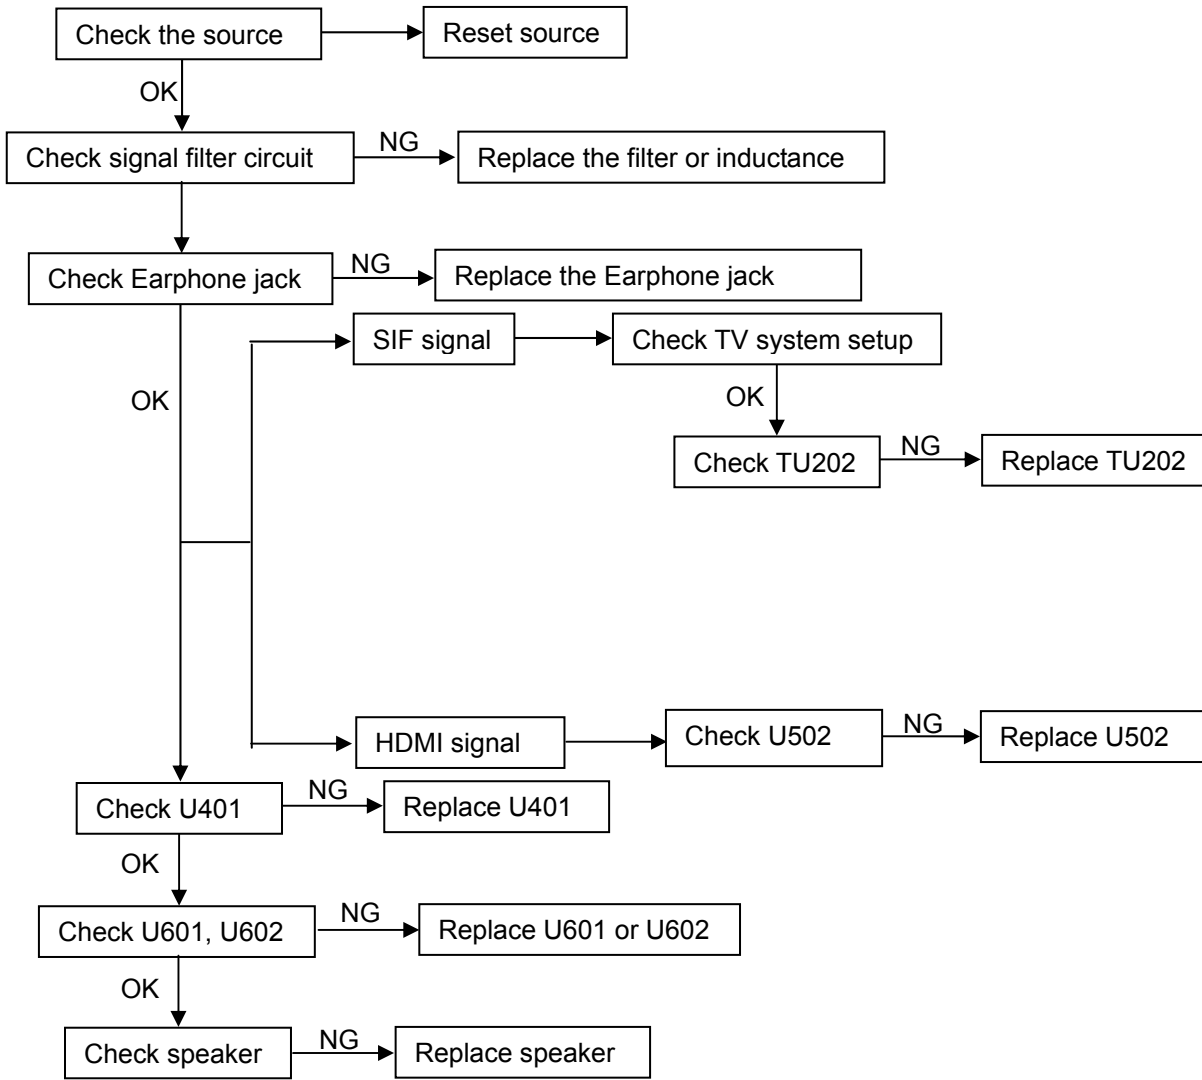



5.6. Key Board


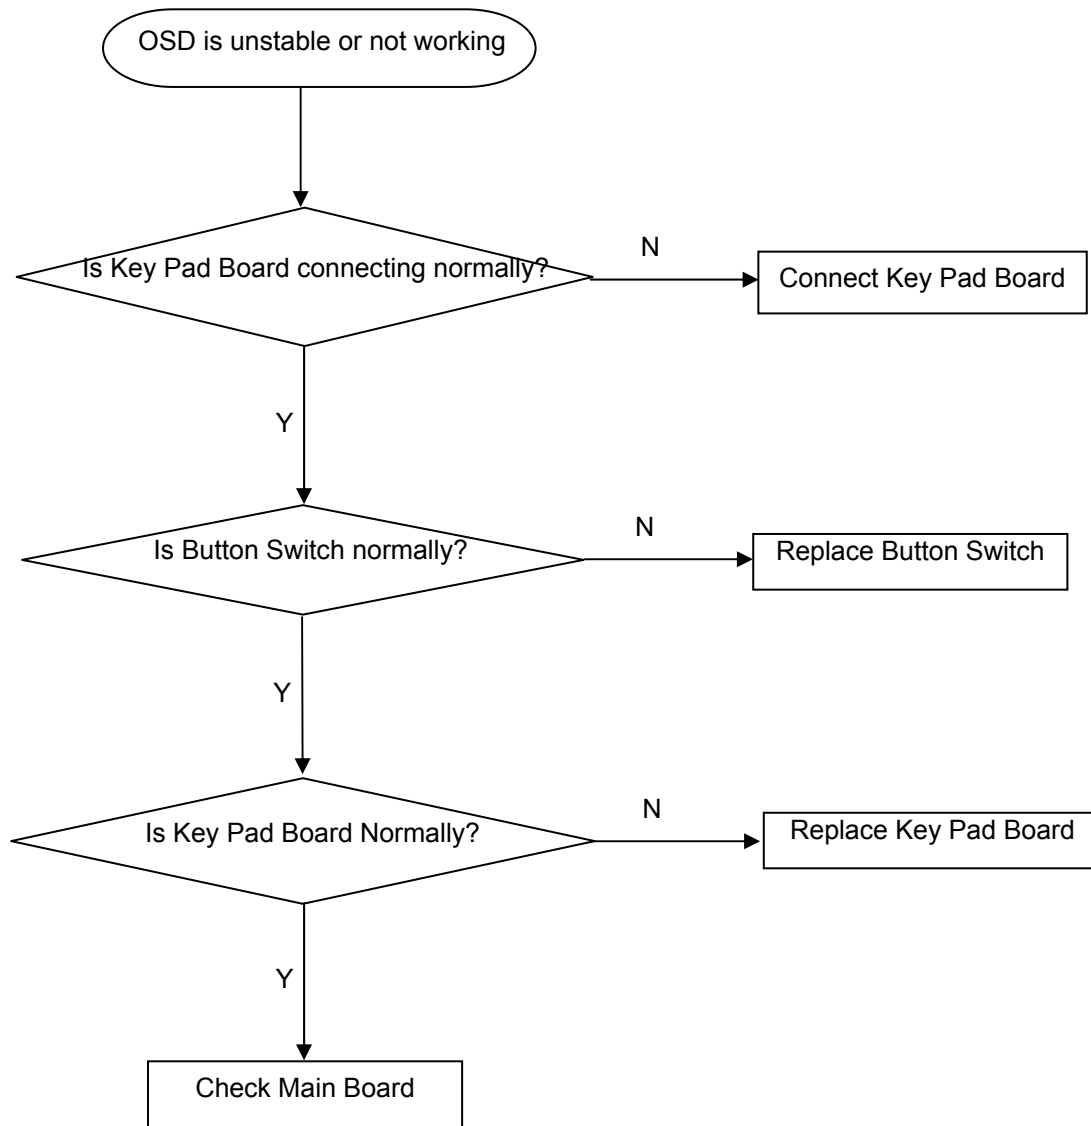



6. PCB Layout

6.1 Main Board

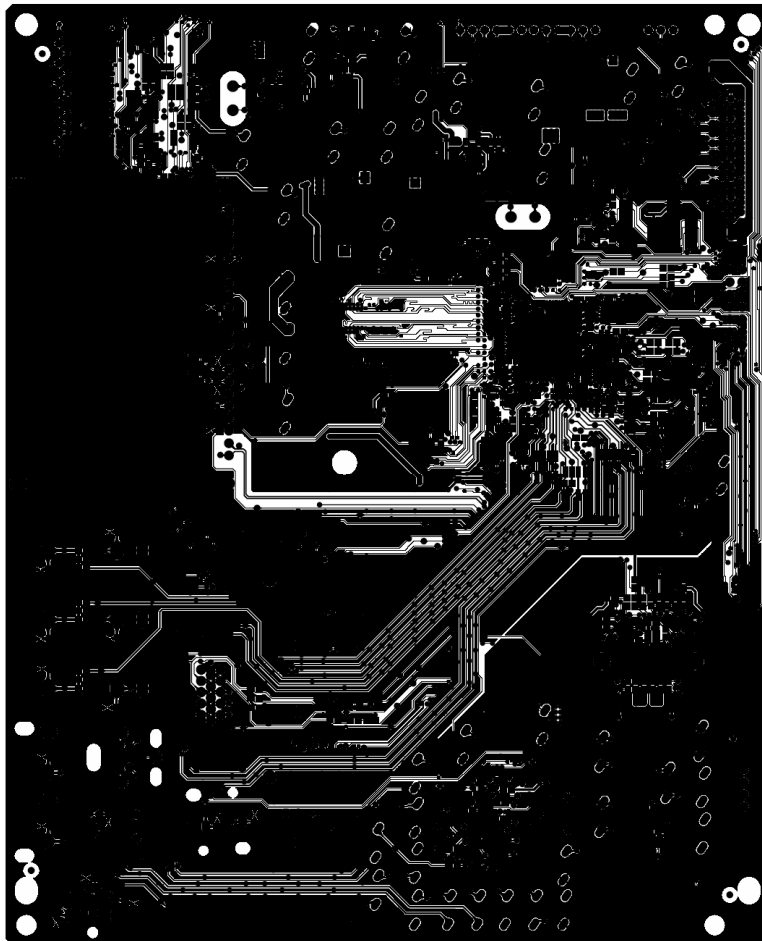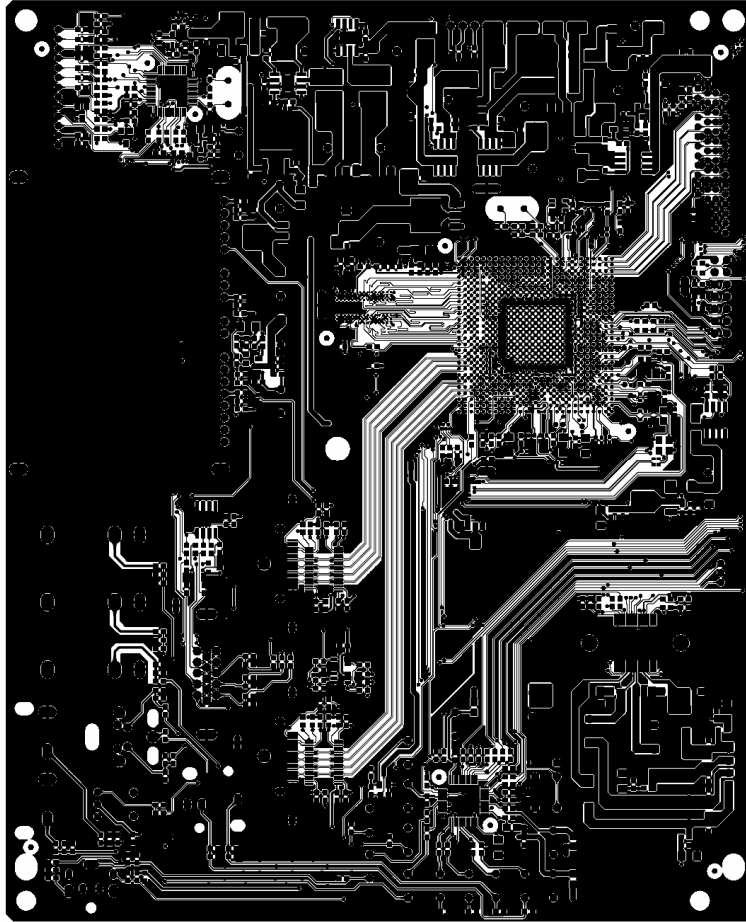


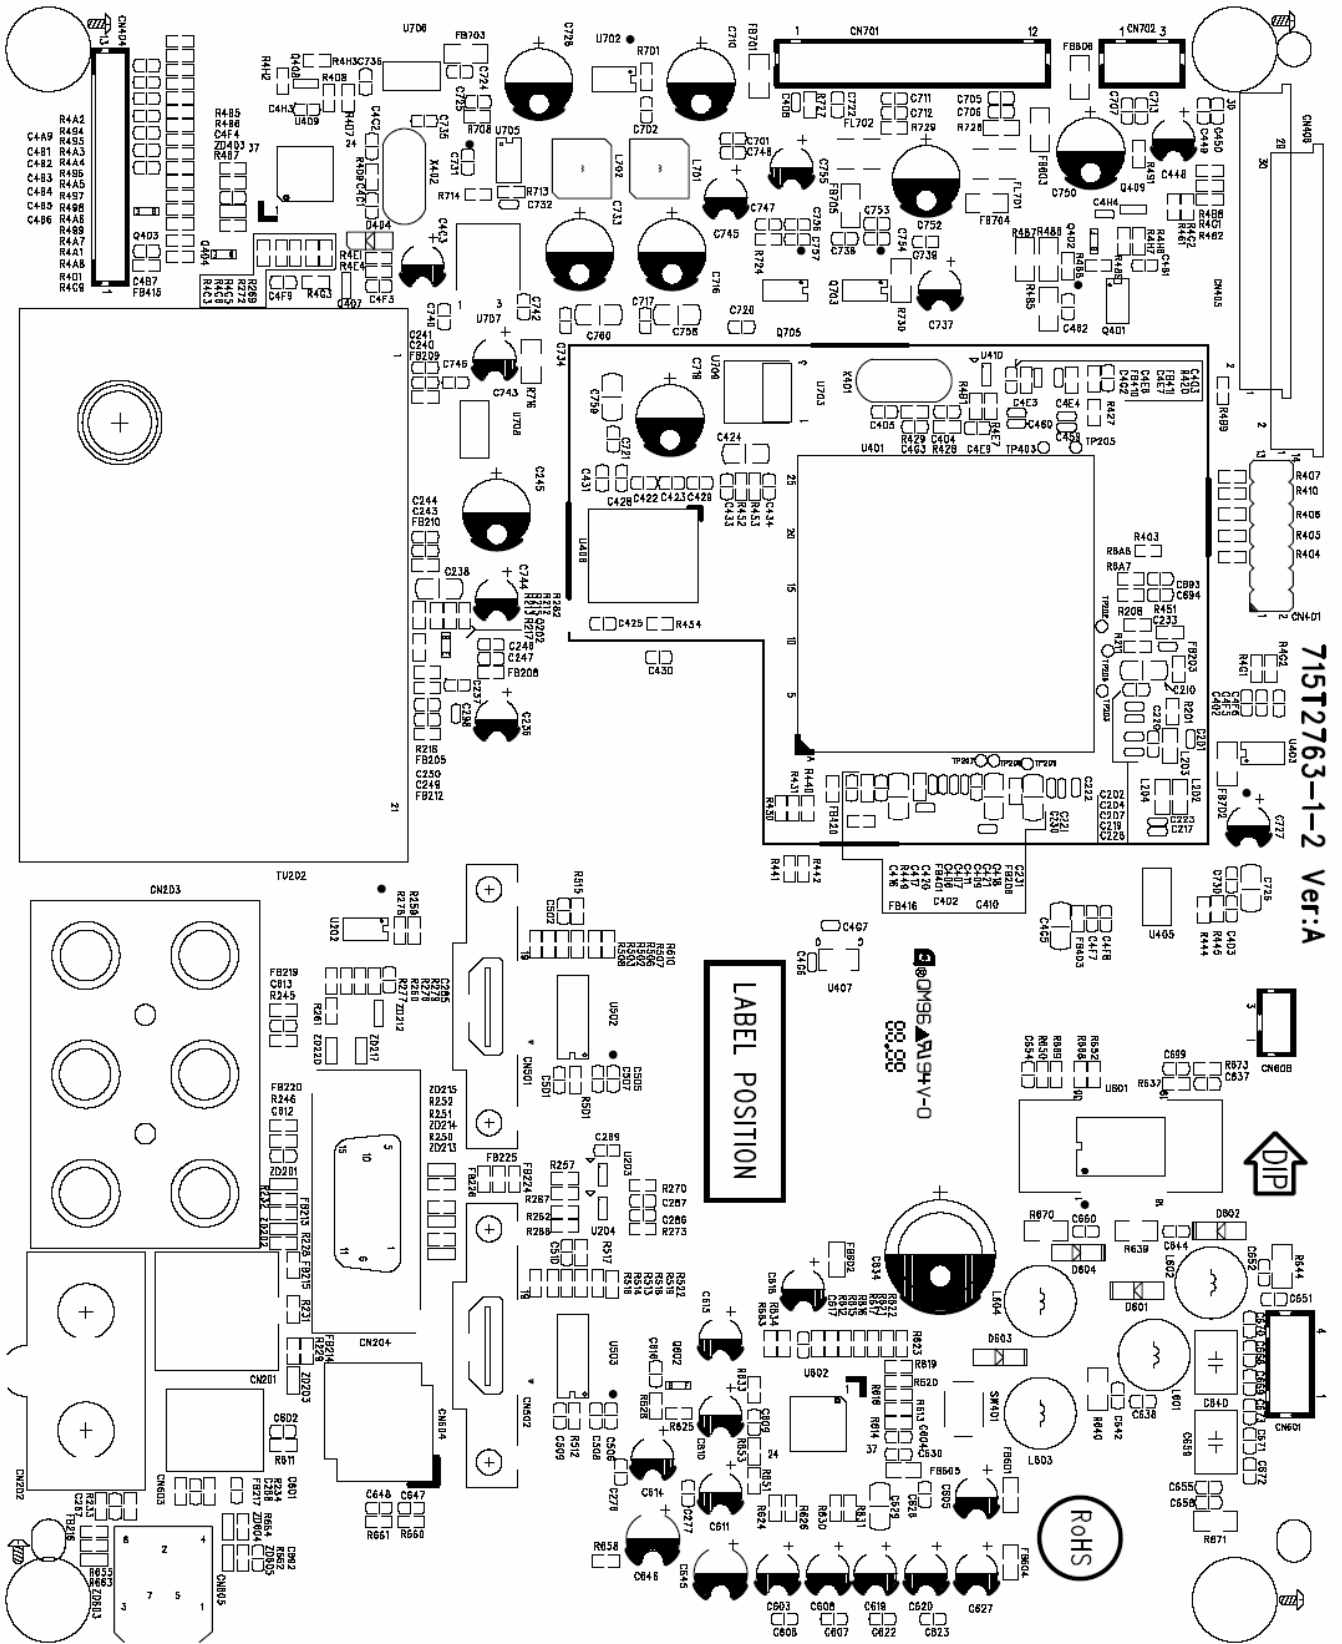

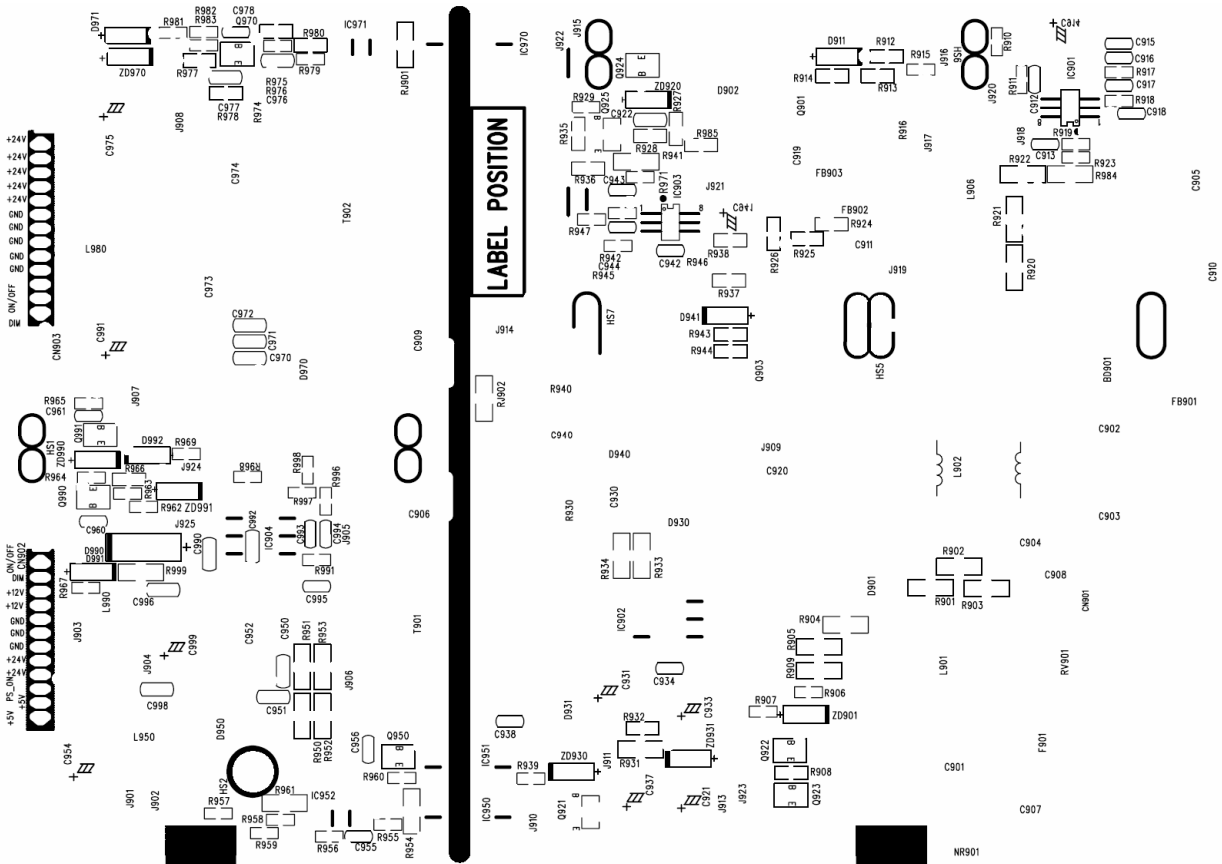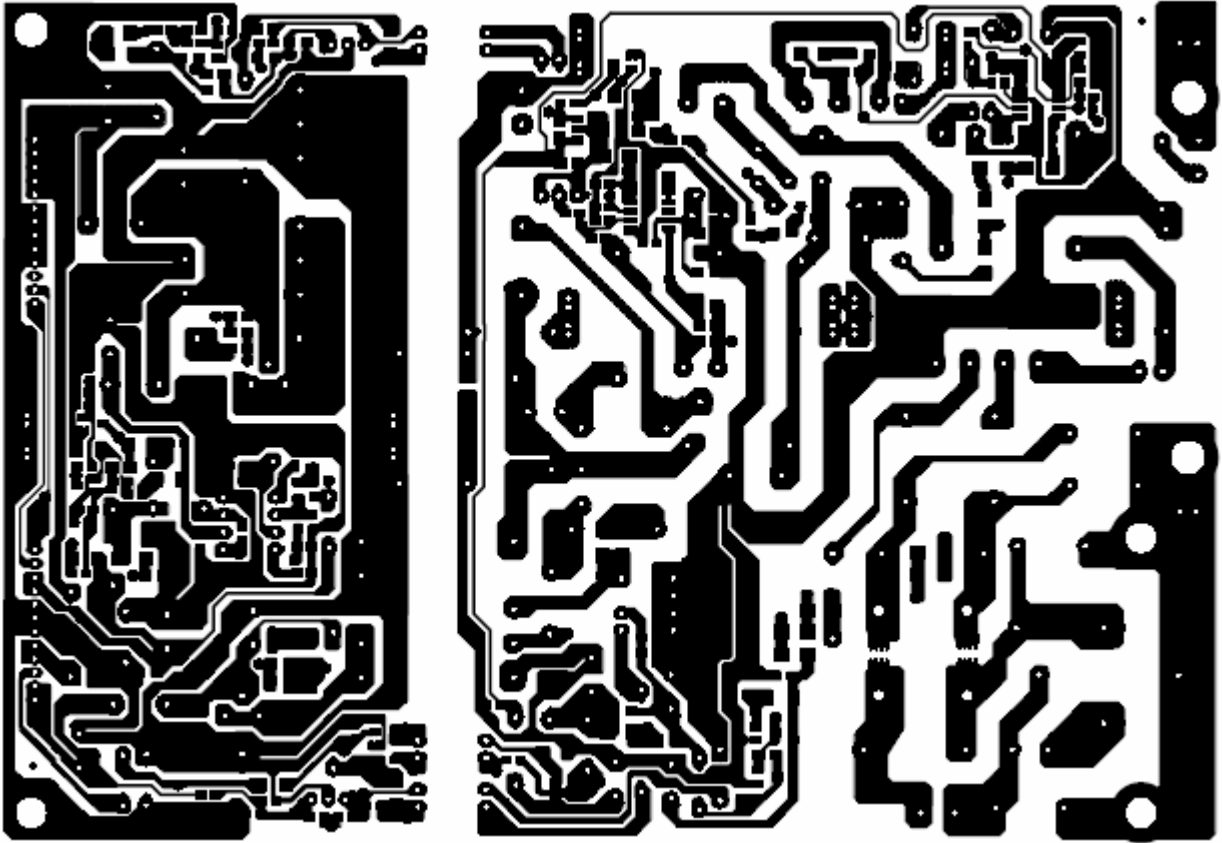


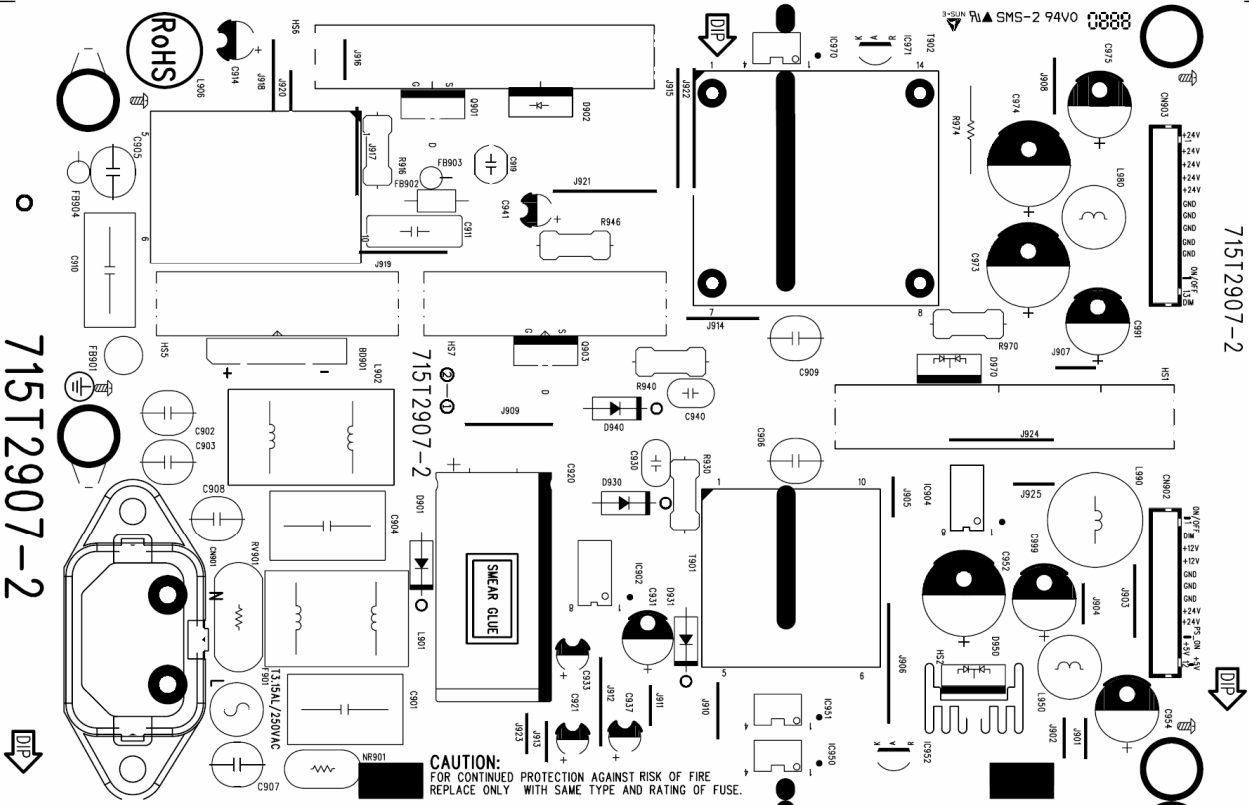

6.3 Key Board

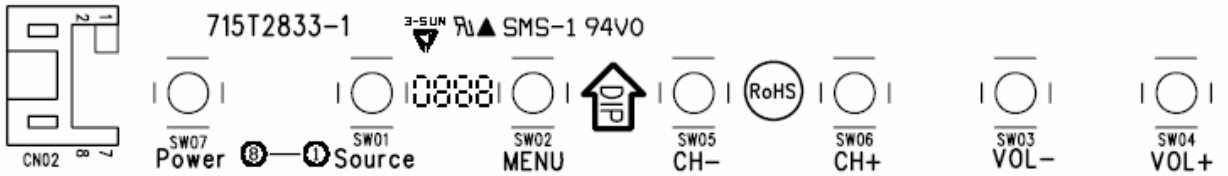

6.4 IR Board

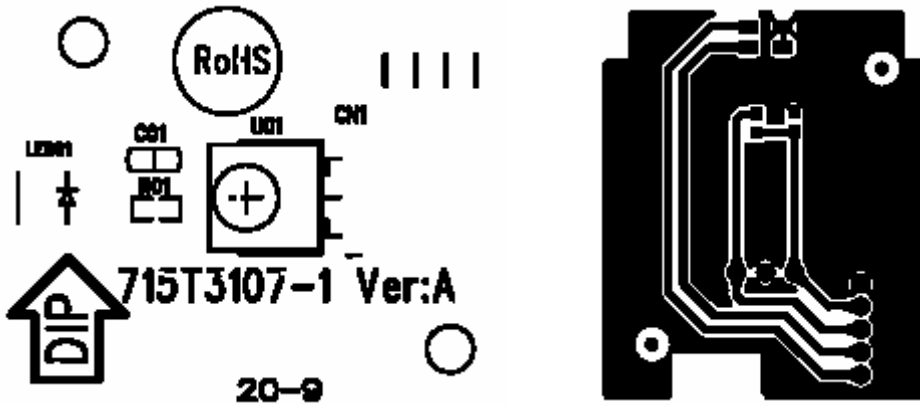


7. Adjustment

It's no need to adjust the white balance for this model .

Enter into the factory mode:


Turn on the TV, press MENU key with remote control, then press number key 1 → 9 → 9 → 9. It will achieve the factory mode.

8. Block Diagram




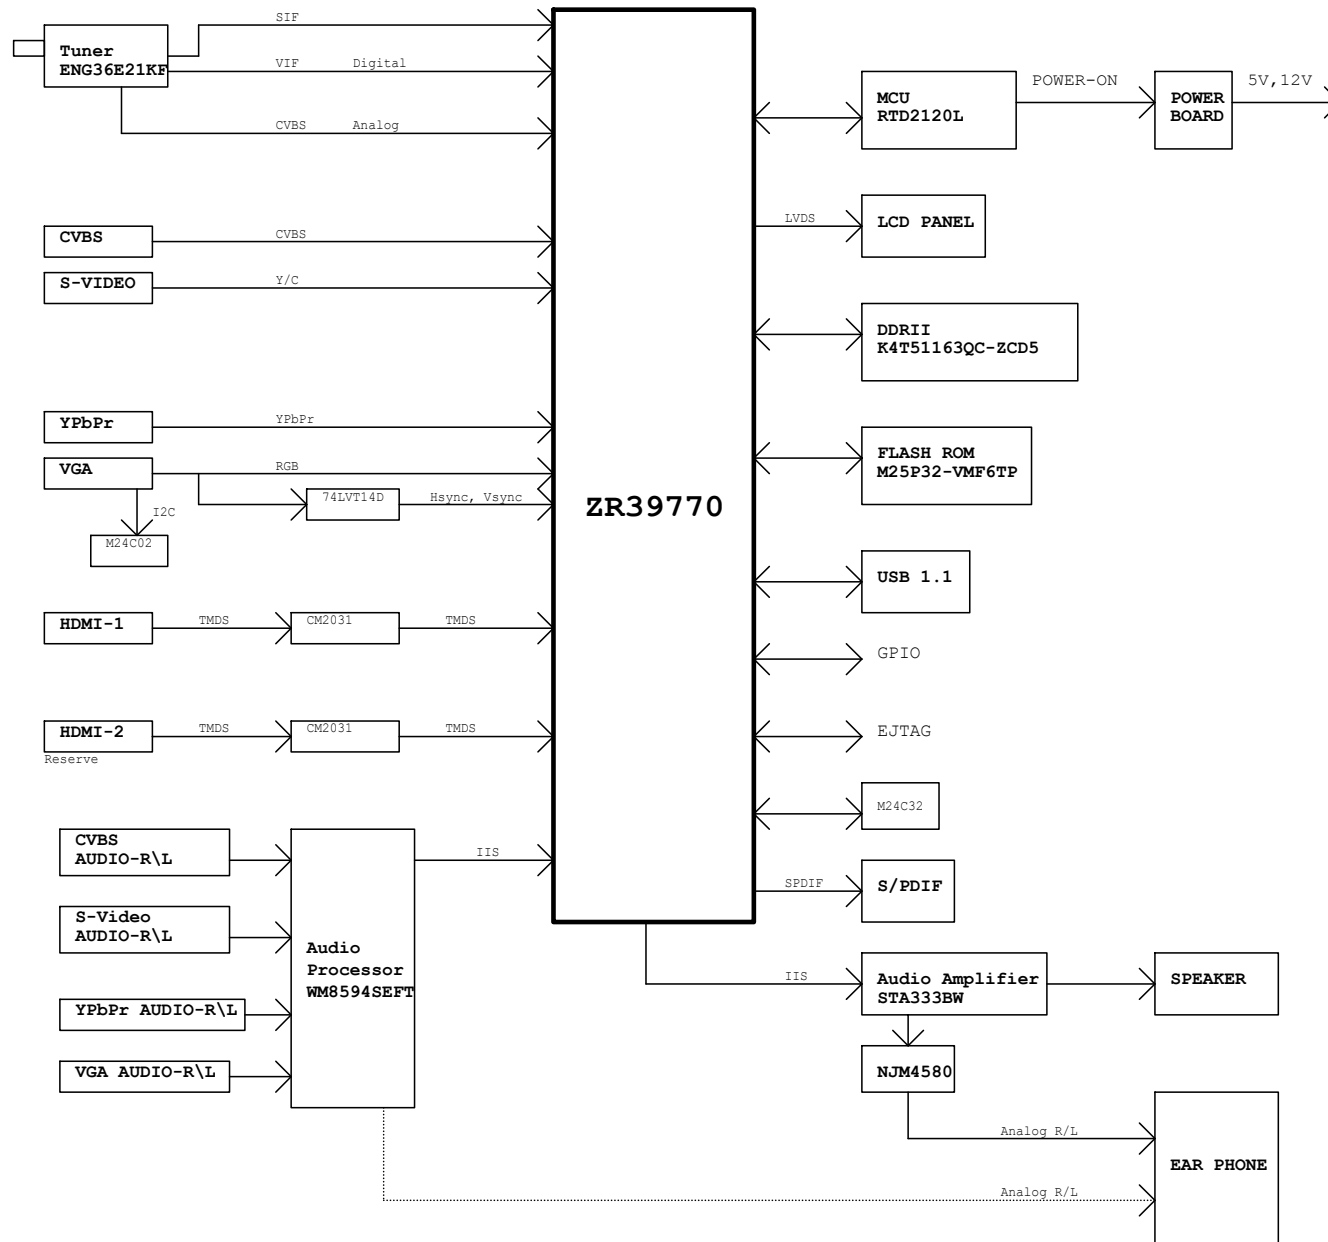


9. Schematic Diagram







9.1 Main Board

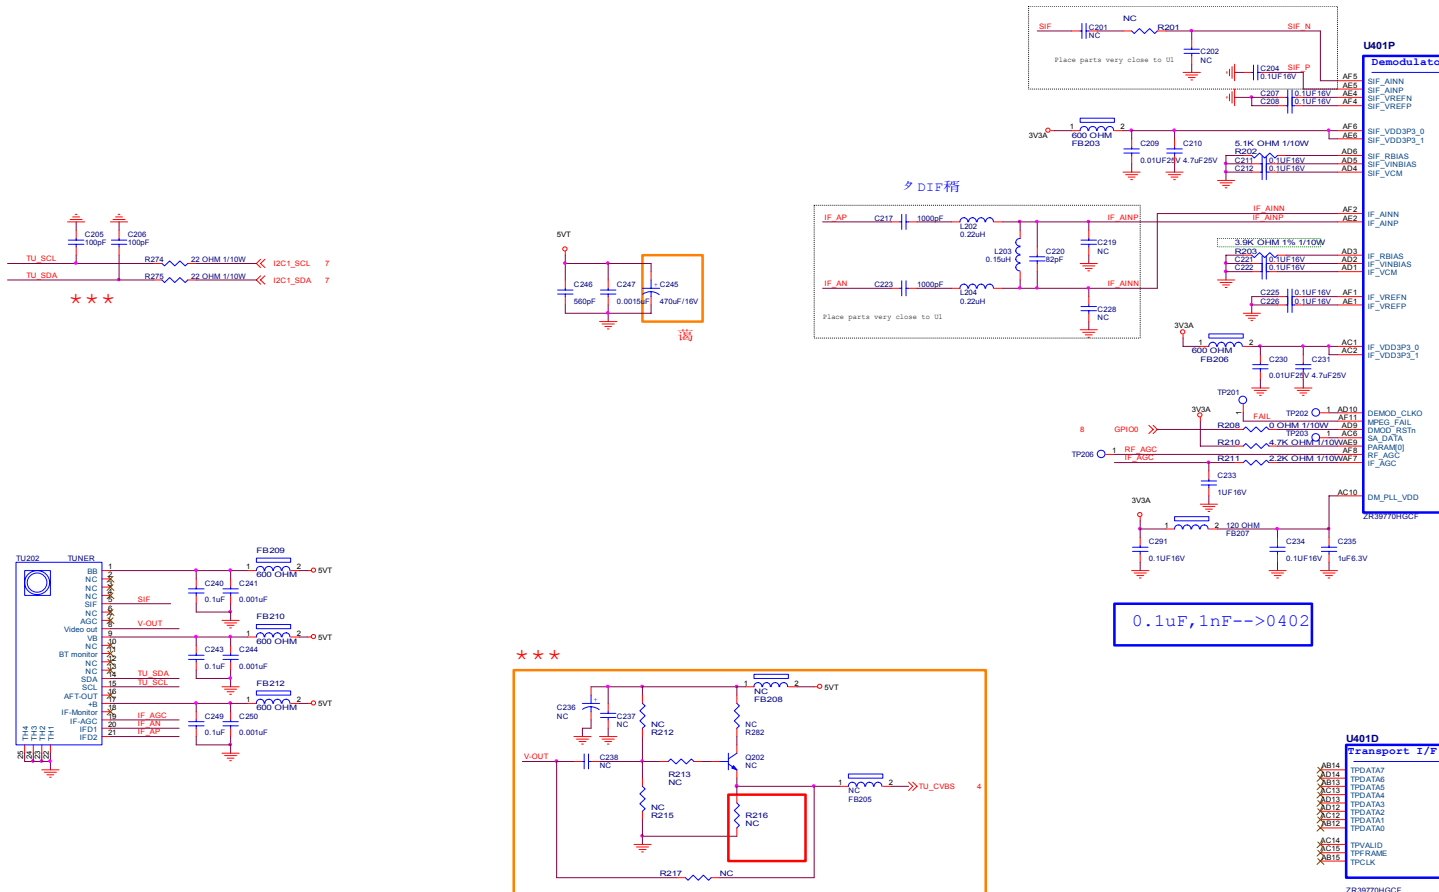






TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Viewsonic	Sim	C
Key Component	T2763-1-X-X-30-080909	TPV MODEL	E268MKNVDVAN/E268MKNKPVN	Rev
	03-Tuner	PCB NAME	715T2763	E
Date	Tuesday, September 09, 2008	Sheet	3 of 18	Rev
				<8>

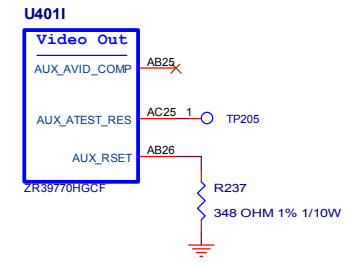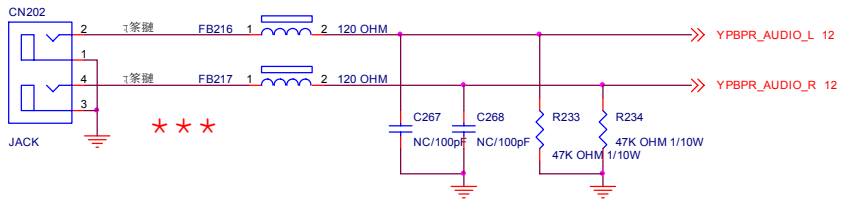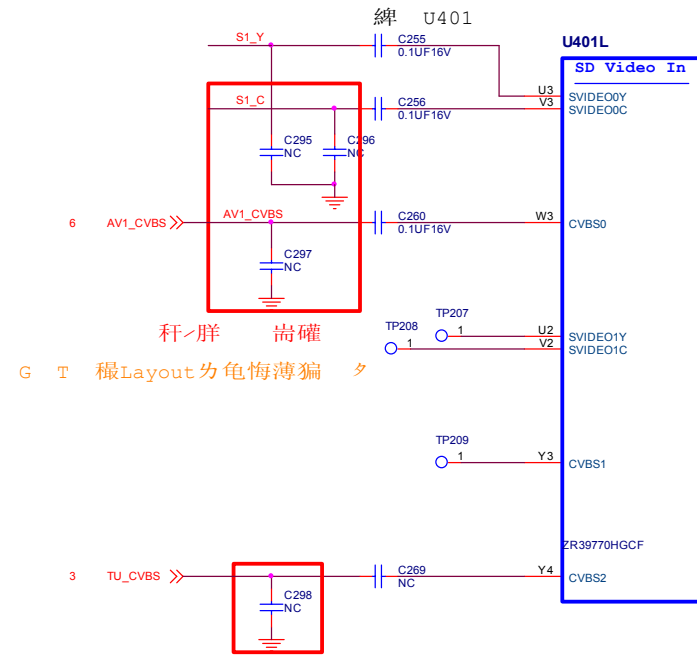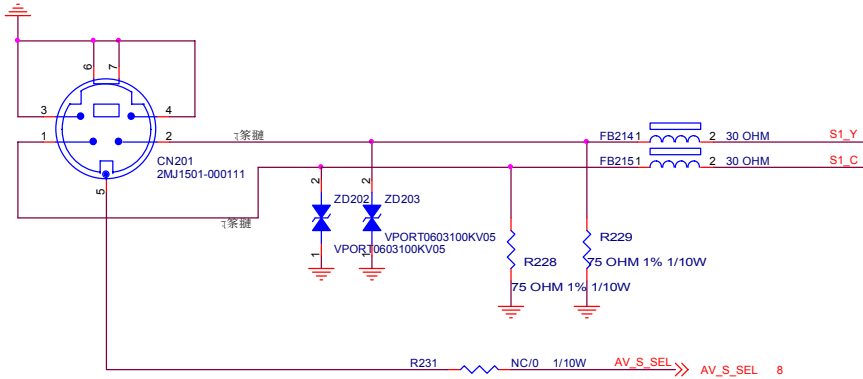




TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Viewsonic	Size	Custom
絲爾瓜網廠	T2763-1-X-X-30-080909	TPV MODEL	E268MZNKWDVAN/E268MZNKPVN	Rev
Key Component	04-AV Input	PCB NAME	715T2763	E
Date	Tuesday, September 09, 2008	Sheet	4 of 18	<修家>

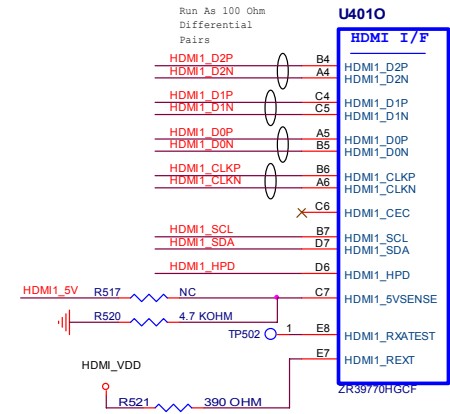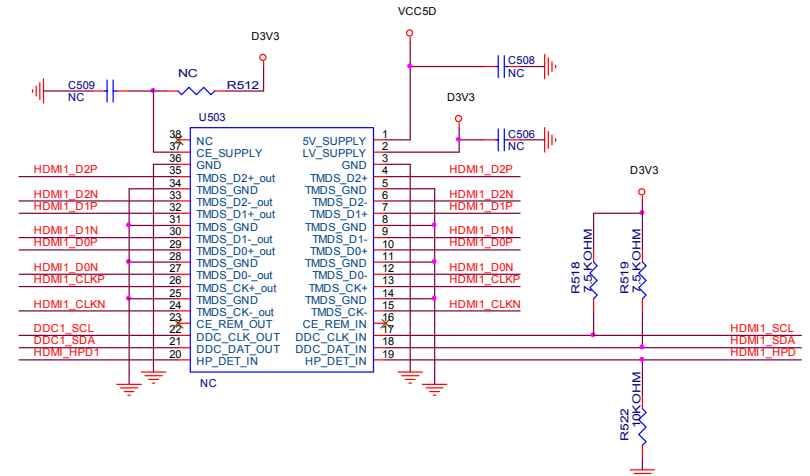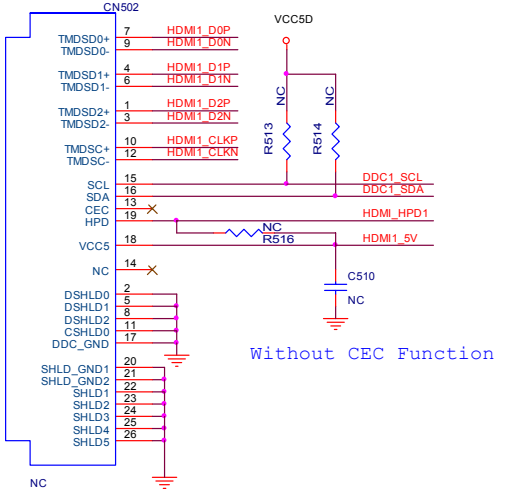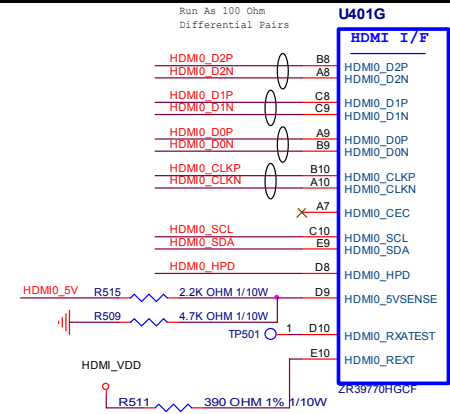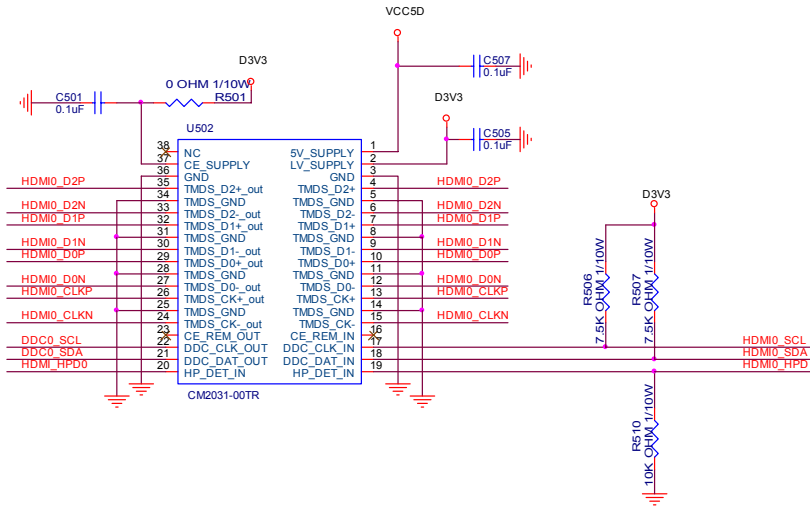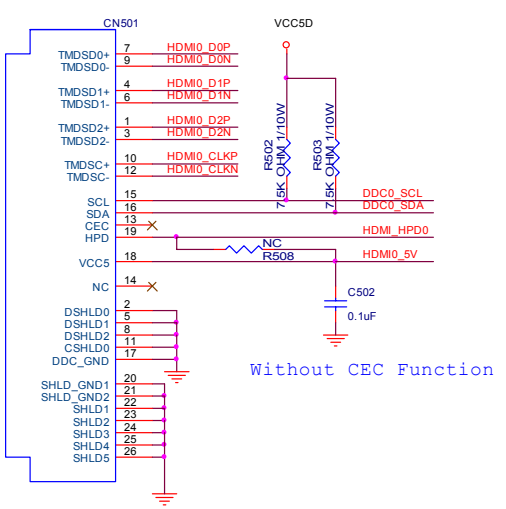

TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL Viewsonic	Size	Custom
絲隔瓜網廠 T2763-1-X-X-30-080909	TPV MODEL E268MZNKWDVAN/E268RMZNPVN	Rev	E
Key Component 05-HDMI Input	PCB NAME 715T2763	称差	<称差>
Date Tuesday, September 09, 2008	Sheet 5 of 18		

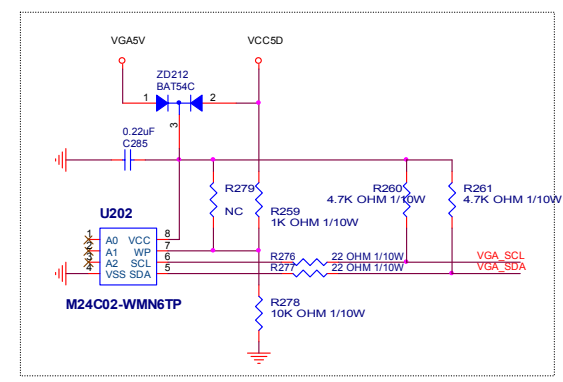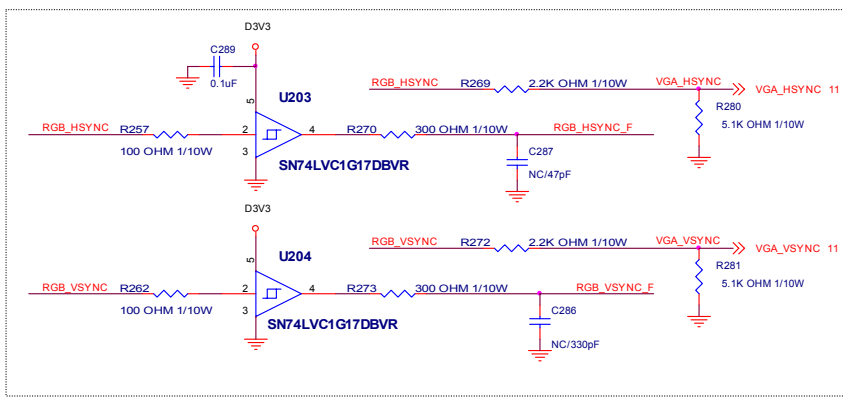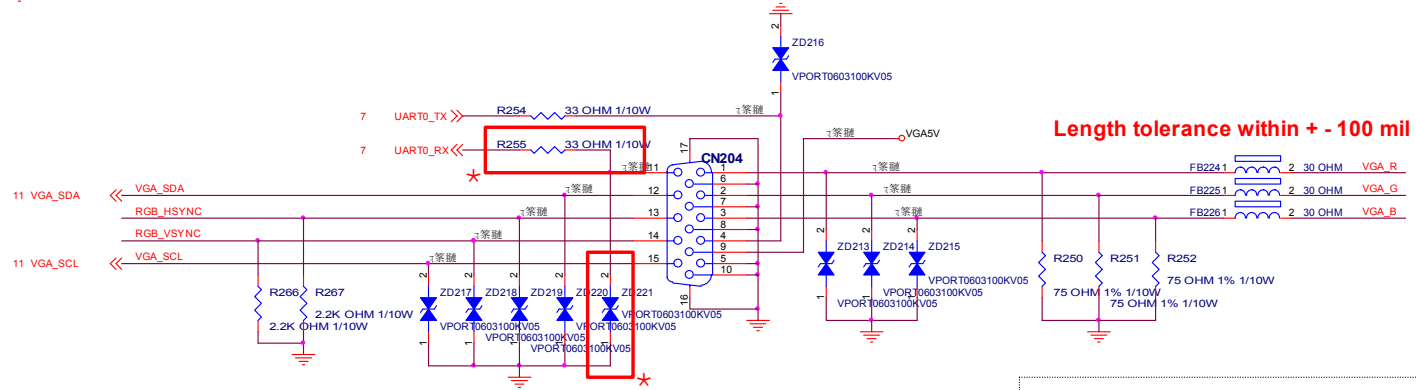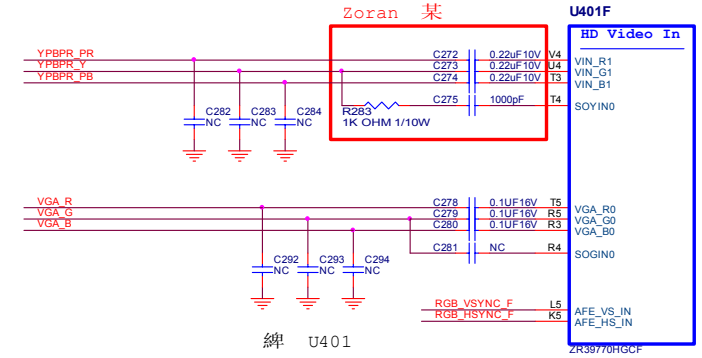
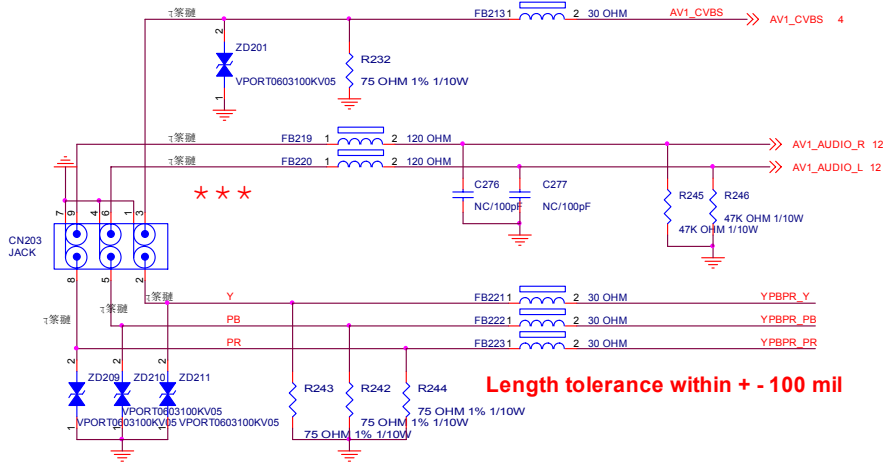


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Viewsonic	Size	Custom
插隔瓜銅膜	T2763-1-X-X-30-080909	TPV MODEL	E268MZNKWDVAN/E26RMZNPVN	Rev
Key Component	06-YPr/VGA Input	PCB NAME	715T2763	Rev
Date	Tuesday, September 09, 2008	Sheet	6 of 18	Rev

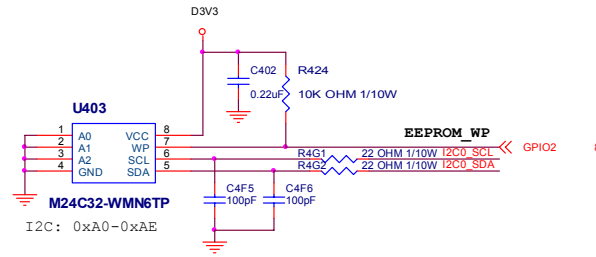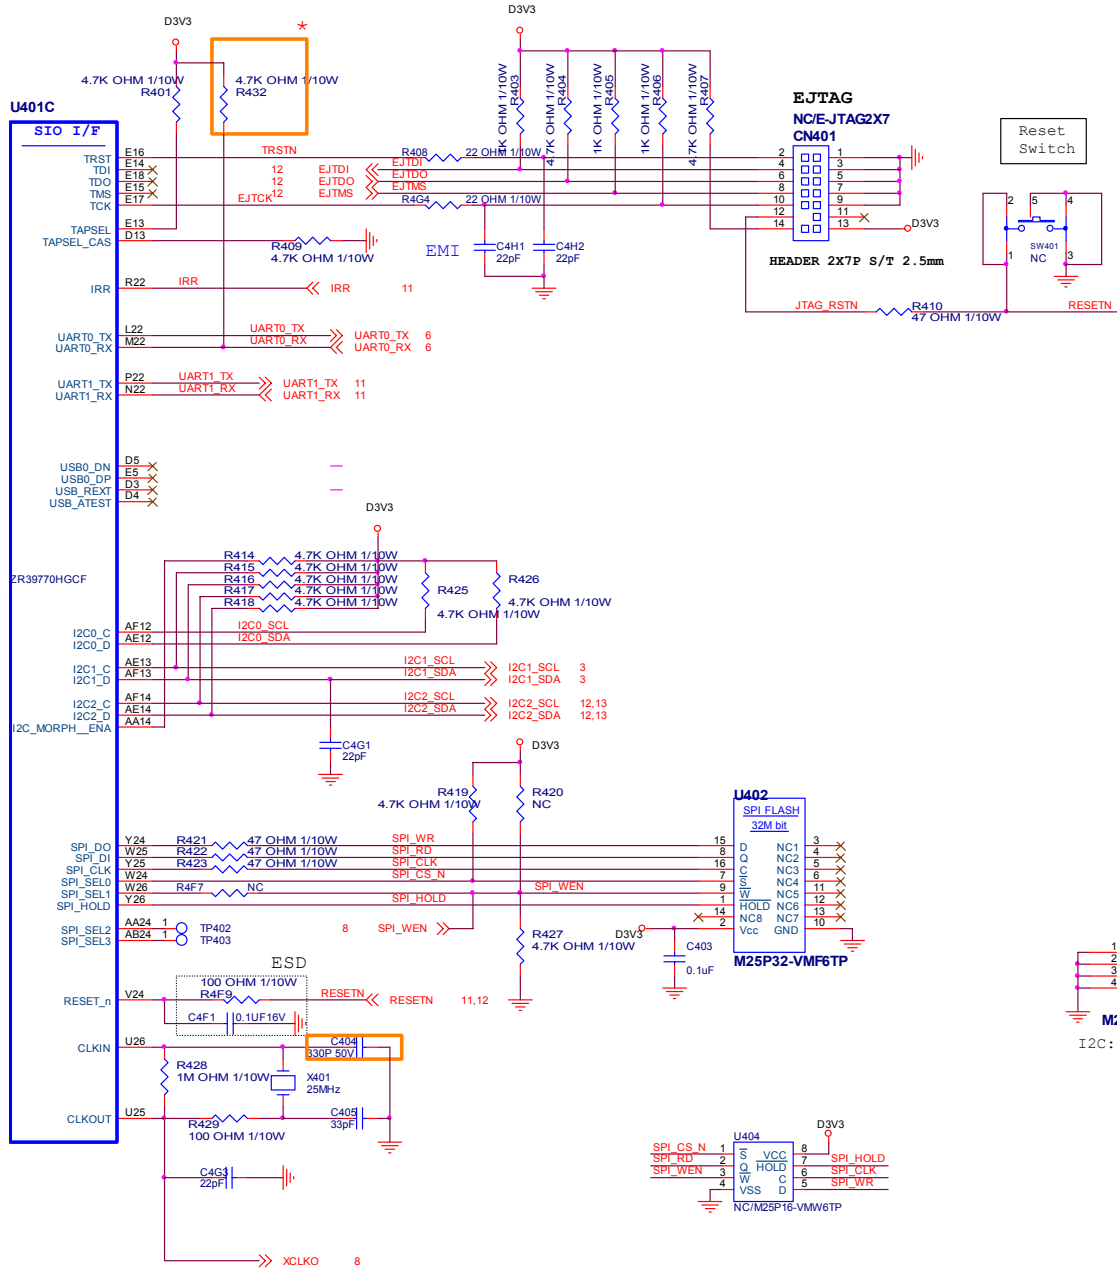


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	BBY	Size	Custom
振瑞瓜網	T2763-1-X-X-30-080909	E268MZNKWDVAN/E268MZNKPVN	Rev	E
Key Component	07-SIO I/F	PCB NAME	71512763	修審 <修審>
Date	Tuesday, September 09, 2008	Sheet	7 of 18	


U401K

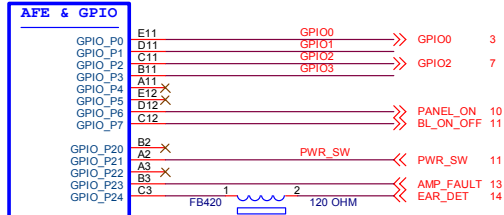

ZR39770HGCF

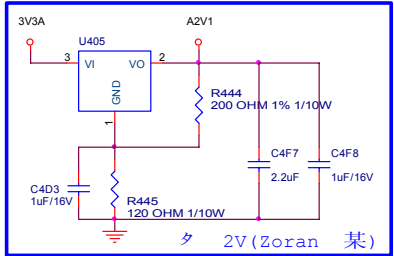


Bootstrap Configuration

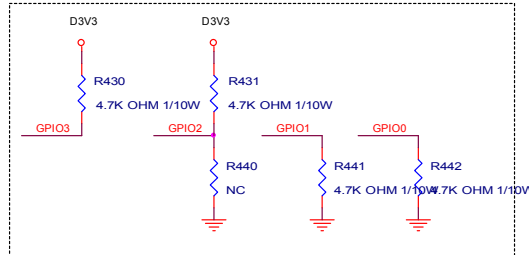


Boot Option	GPIO3	GPIO2	GPIO1	GPIO0
16-Bit NAND-Small Page	1	0	1	1
SPI	1	1	0	0
8-Bit NAND-Large Page	1	1	0	1
8-Bit NAND-Small Page	1	1	1	1


U401M

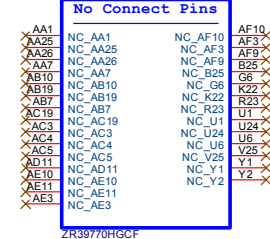



U401S

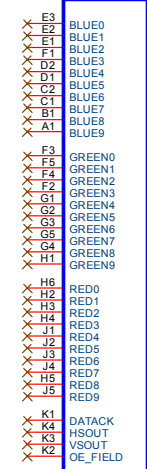



U401H

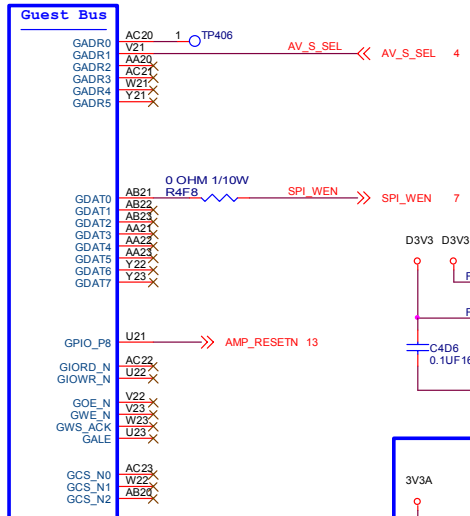


ZR39770HGCF

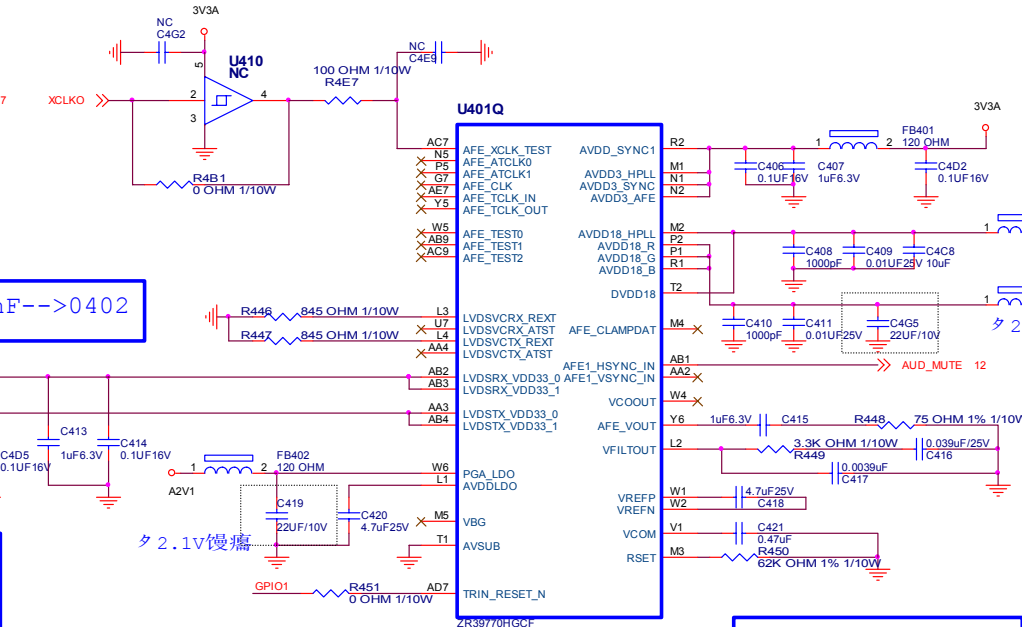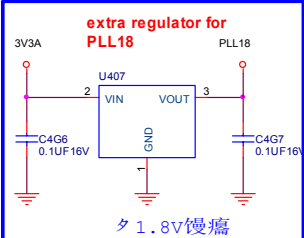






TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Viewsonic	Size	Custom
新開瓜銀期	T2763-1-X-X-30-080909	TPV MODEL	E268MZNKWDVAN/E268MZNKPVN	Rev
Key Component	08-GPIO Block	PCB NAME	715T2763	E
Date	Tuesday, September 09, 2008	Sheet	8 of 18	移參 <移參>

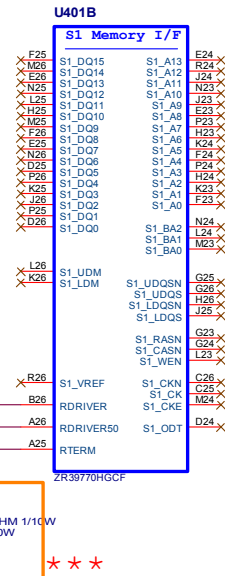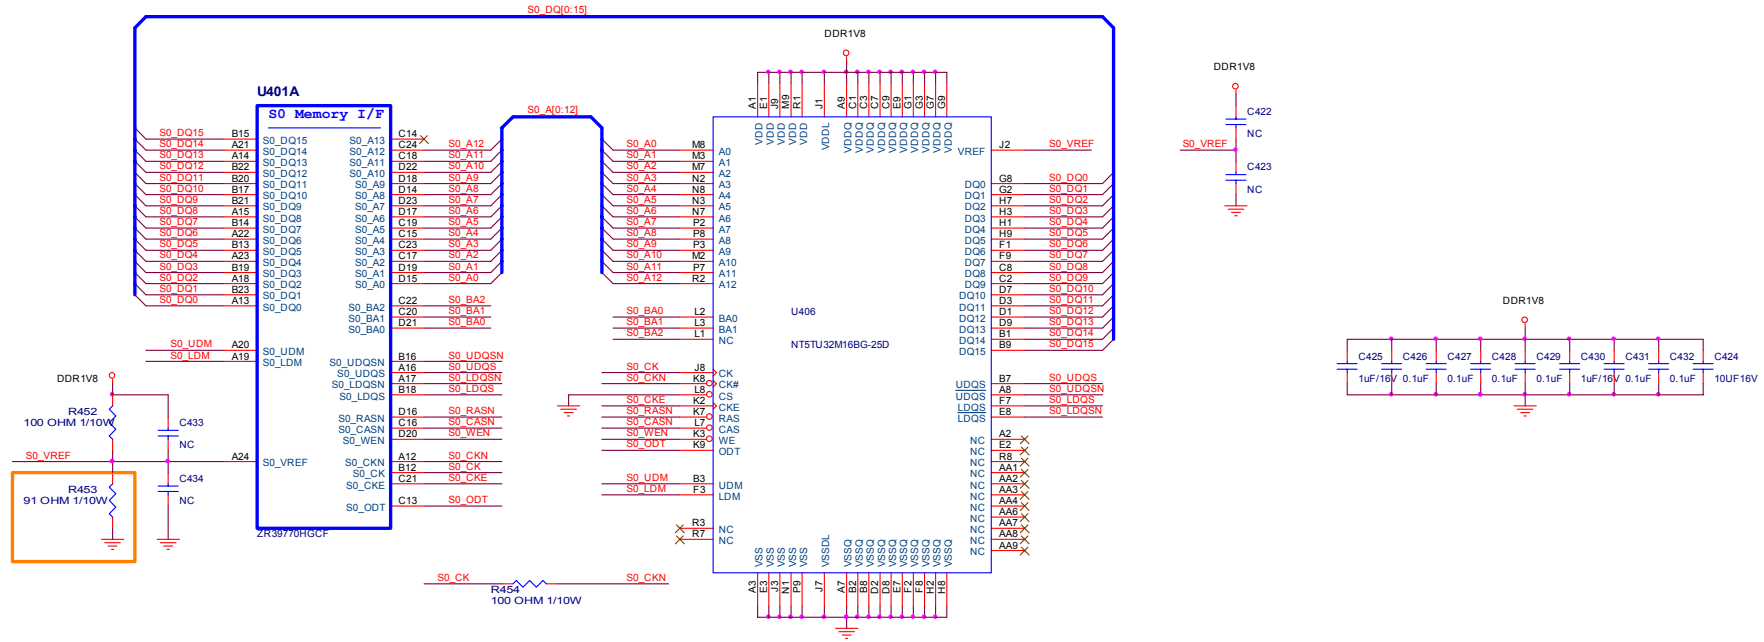

TPV (Top Victory Electronics Co., Ltd.)		OEM MODEL	Viewsonic	Size	Custom
振源成 振源		T2763-1-X-X-30-080909	TPV MODEL	E268MZNKWDVAN/E26RMZKNKPVN	Rev
Key Component		T2763-C-2-X-1-080509	PCB NAME	715T2763	E
Date	Tuesday, September 09, 2008	Sheet	9 of 18	称名	<称名>

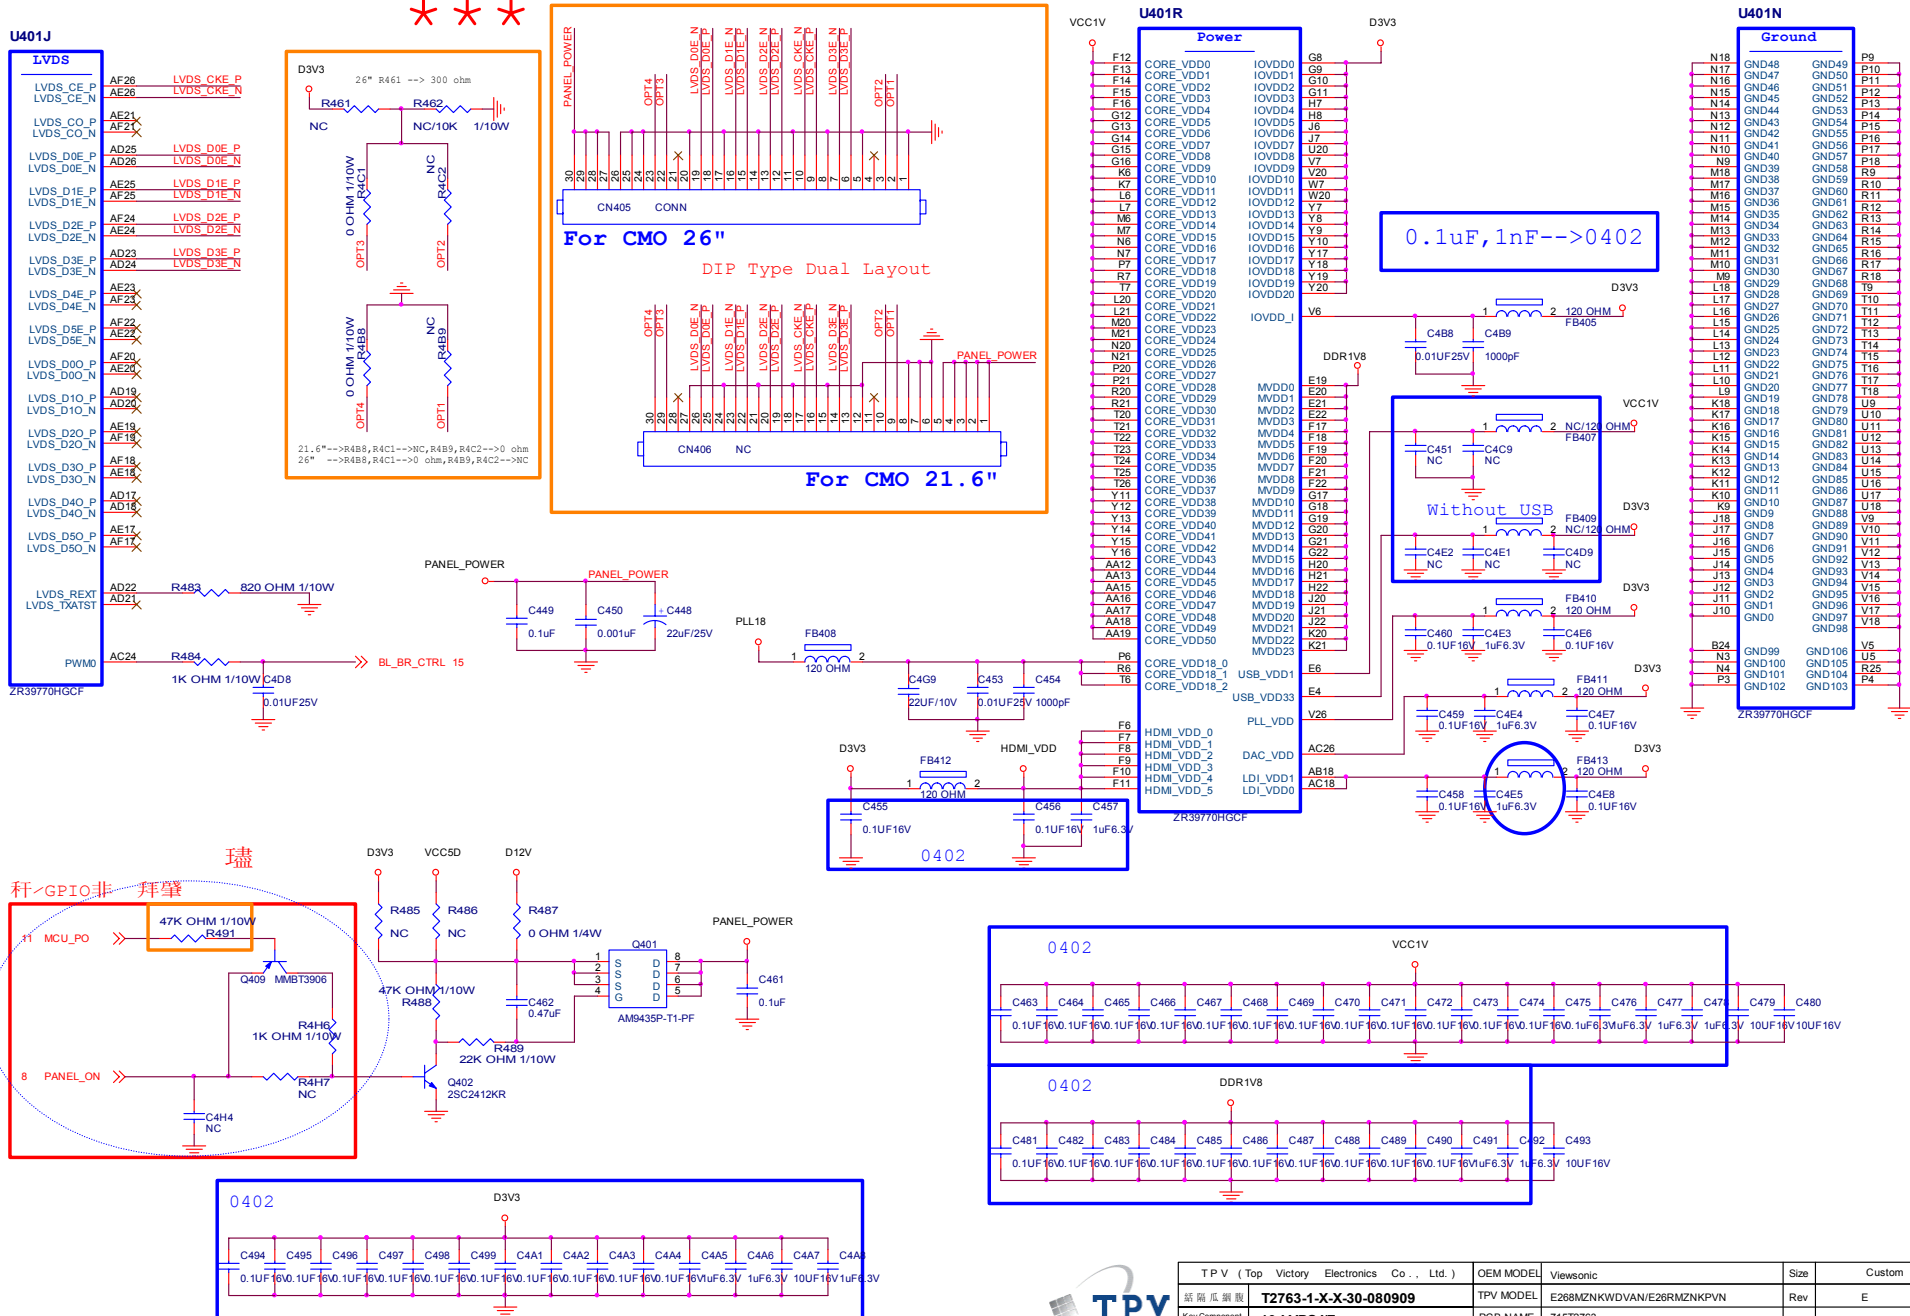


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Viewsonic	Size	Custom
紙張單號: T2763-1-X-X-30-080909	TPV MODEL	E268MZNKWDVAN/E268MZNKPVN	Rev	E
Key Component	PCB NAME	71512763	料號	<料號>
Date	Tuesday, September 09, 2008	Sheet	10 of 18	

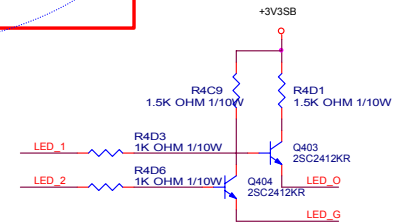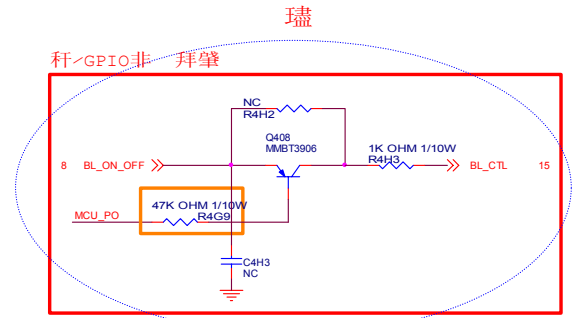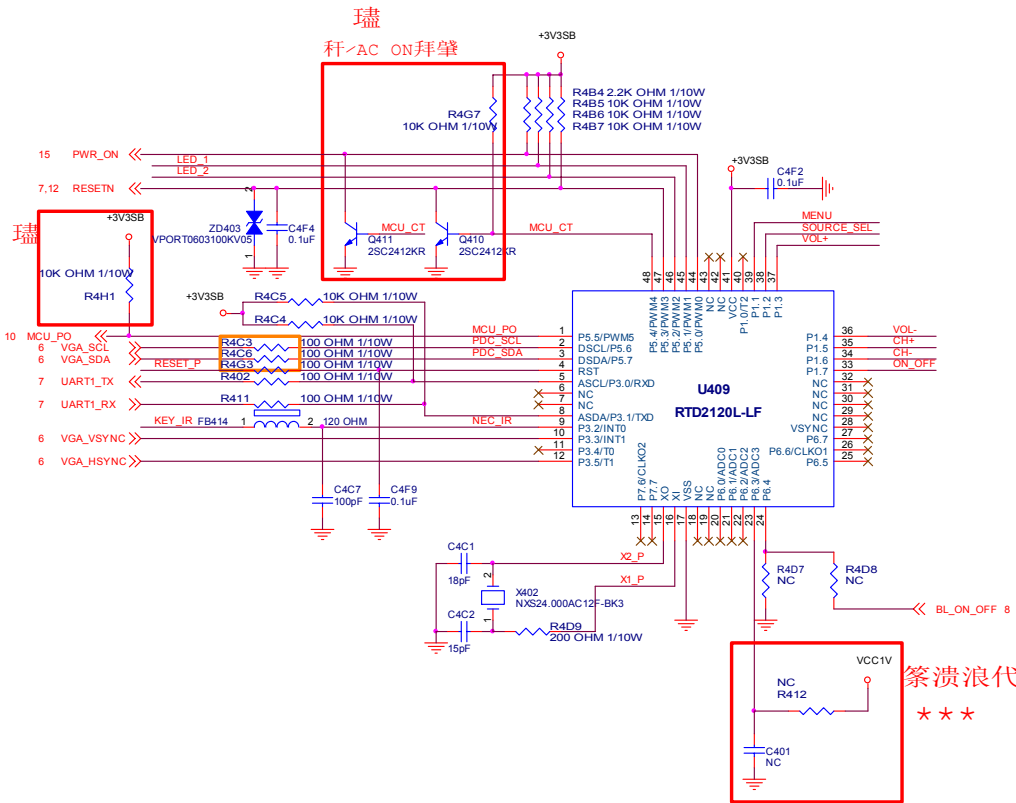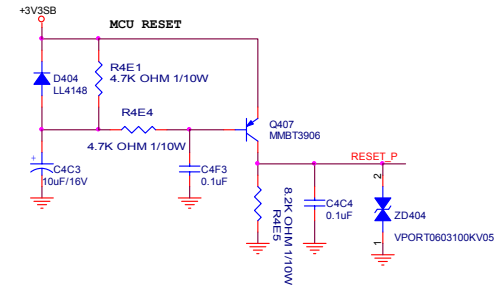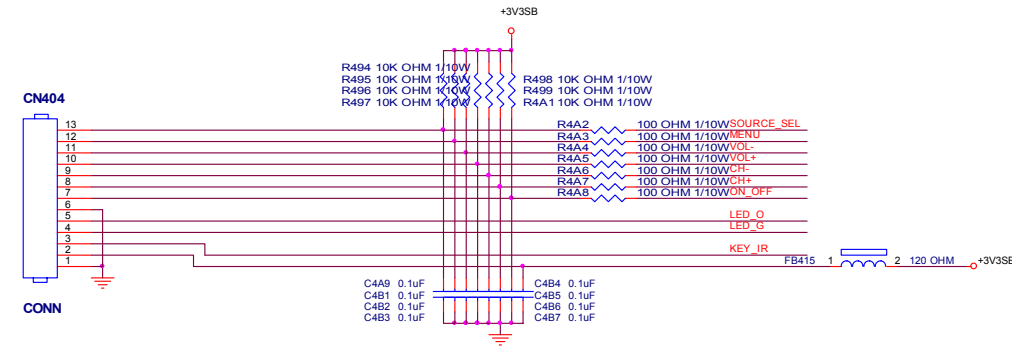


篡溃浪代




TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Viewsonic	Size	Custom
经隔瓜制	T2763-1-X-X-30-080909	TPV MODEL	E268MZNKWV/DVAN/E268MZNKPVN	Rev
Key Component	11-Standby MCU	PCB NAME	715T2763	称参
Date	Tuesday, September 09, 2008	Sheet	11 of 18	<称参>

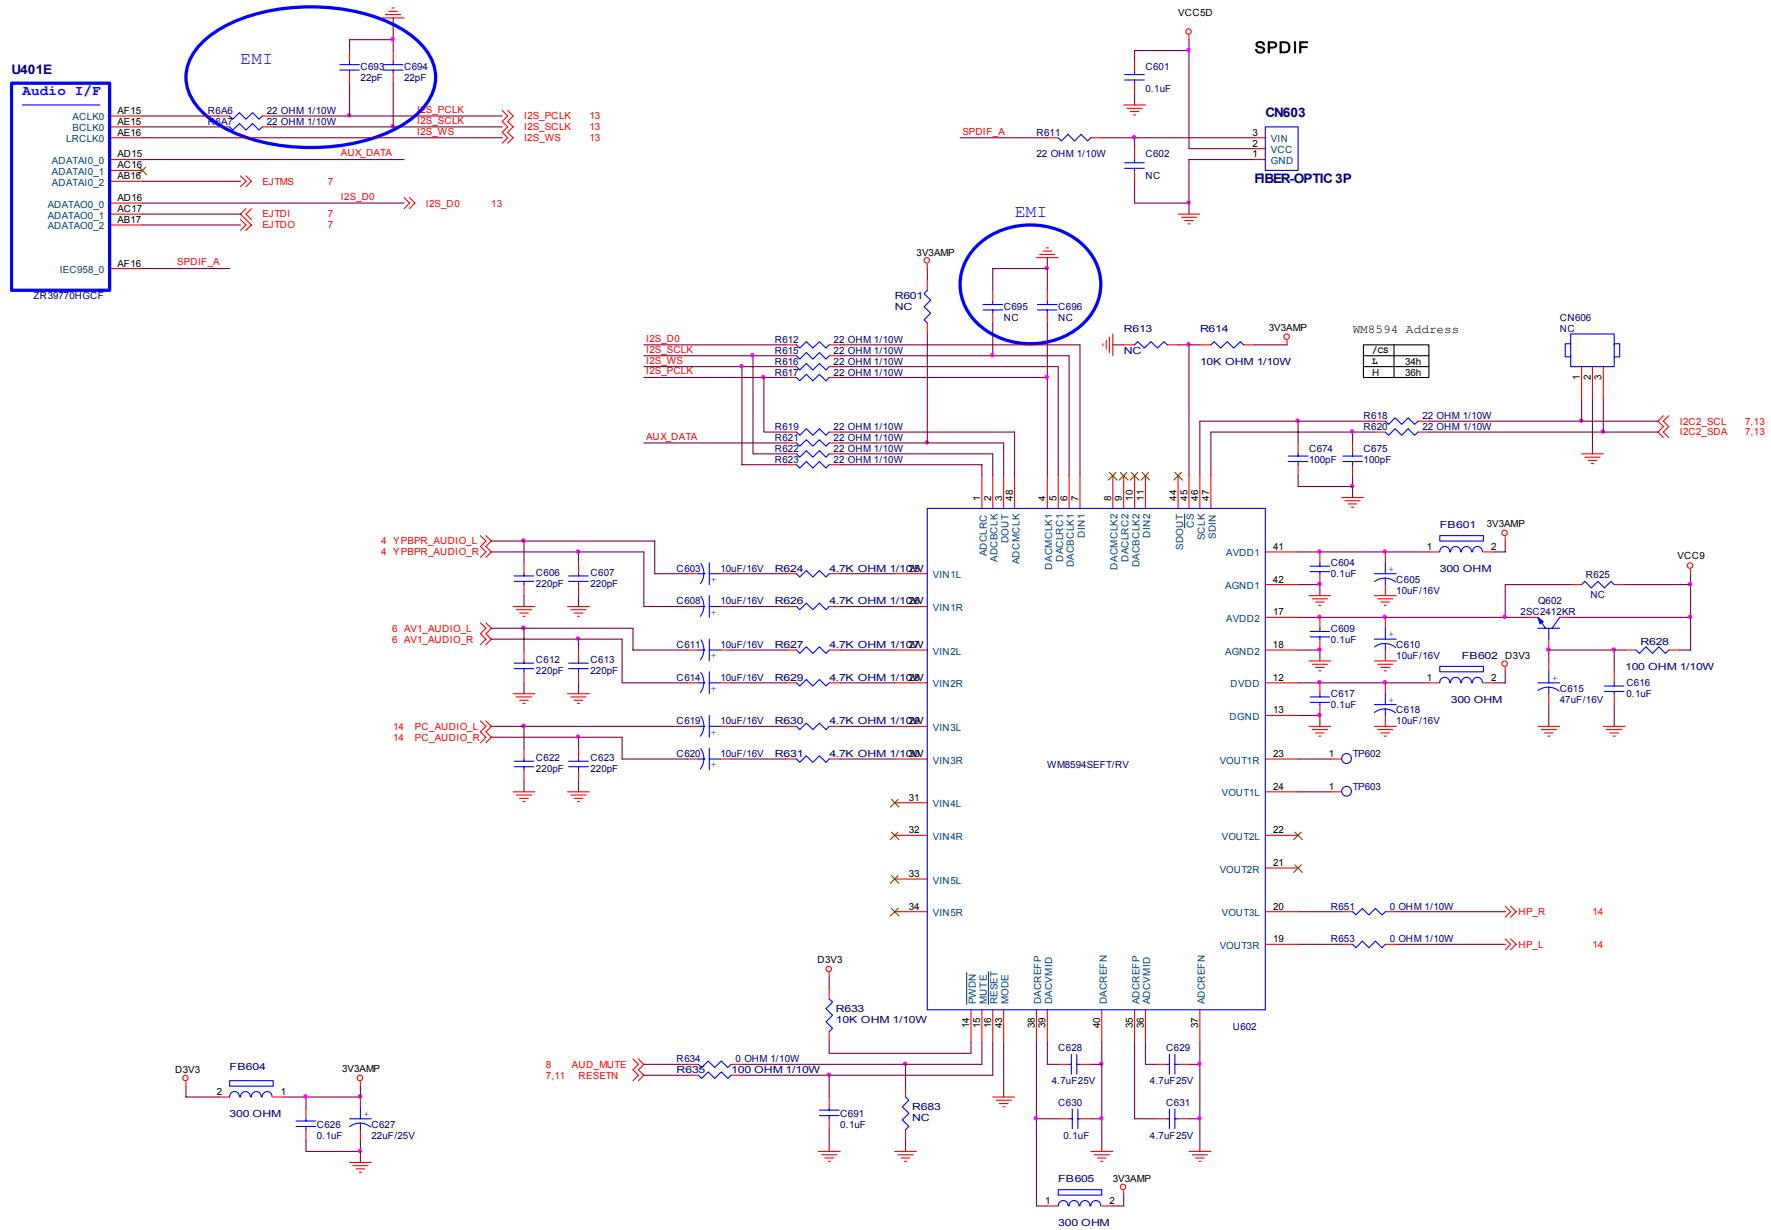











T.P.V. (Top Victory Electronics Co., Ltd.)	OEM MODEL	Viewsonic	Size	Custom	
新橋成製版	T2763-1-X-X-30-080909	TPV MODEL	E268MZNKWDVAN/E268MZNKPNV	Rev	E
Key Component	12-Audio Processor	PCB NAME	71512763	修審	<修審>
Date	Tuesday, September 09, 2008	Sheet	12 of 18		

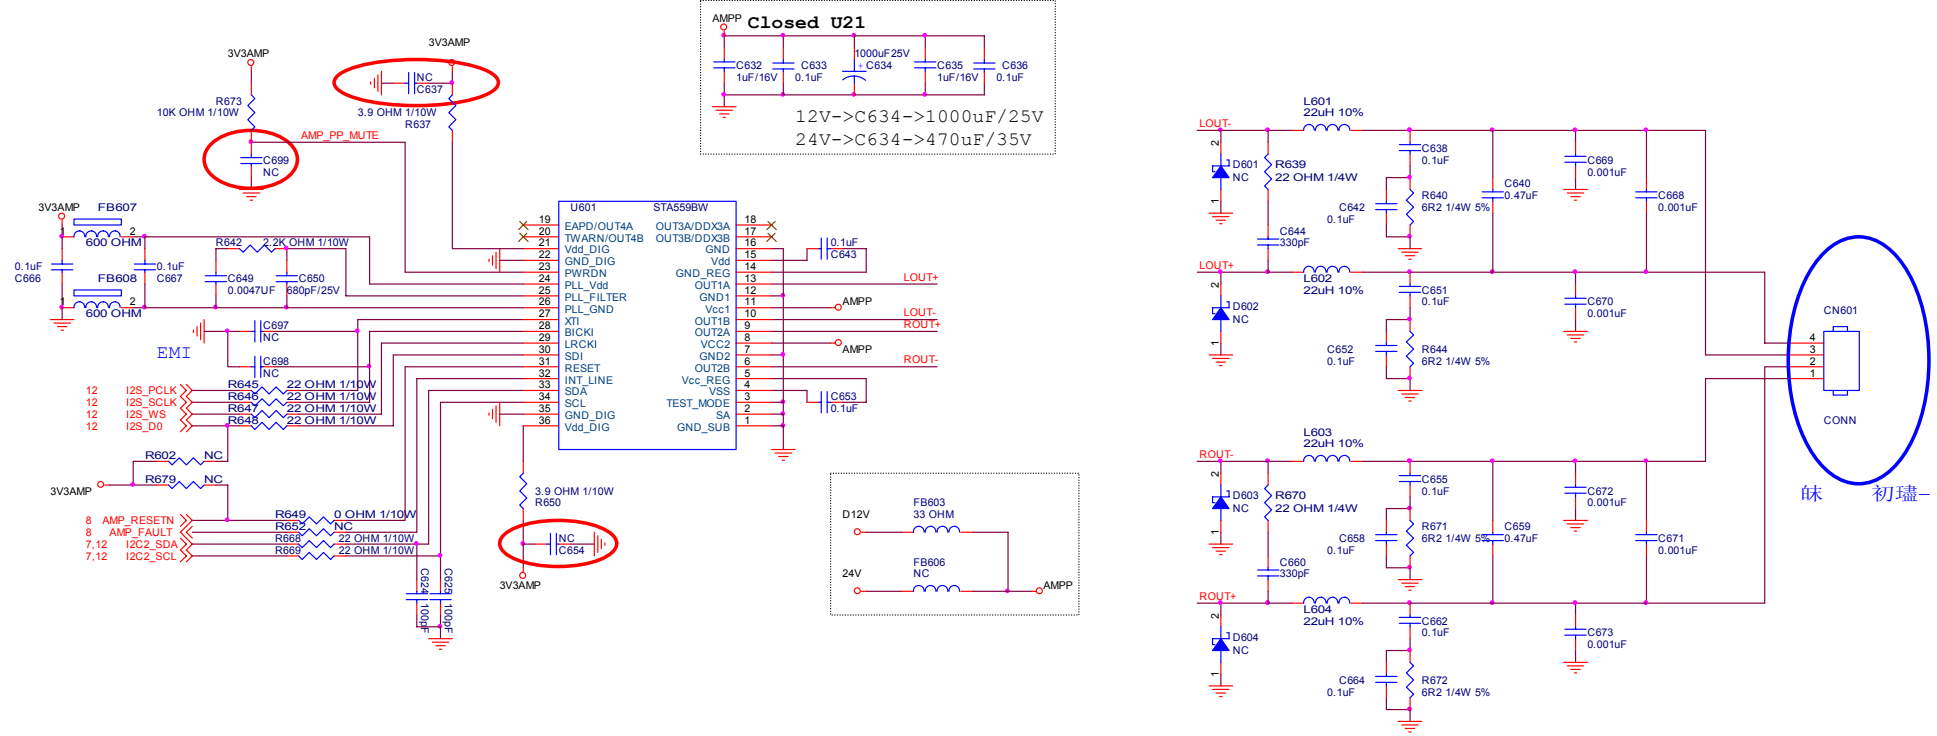

TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Viewsonic	Size	Custom
新錫瓜爾廠	T2763-1-X-X-30-080909	TPV MODEL	E268MZNKWDVAN/E268MZNKPVN	Rev
Key Component	13-Audio Amplifier	PCB NAME	715T2763	E
Date	Tuesday, September 09, 2008	Sheet	13 of 18	繪圖 <繪圖>

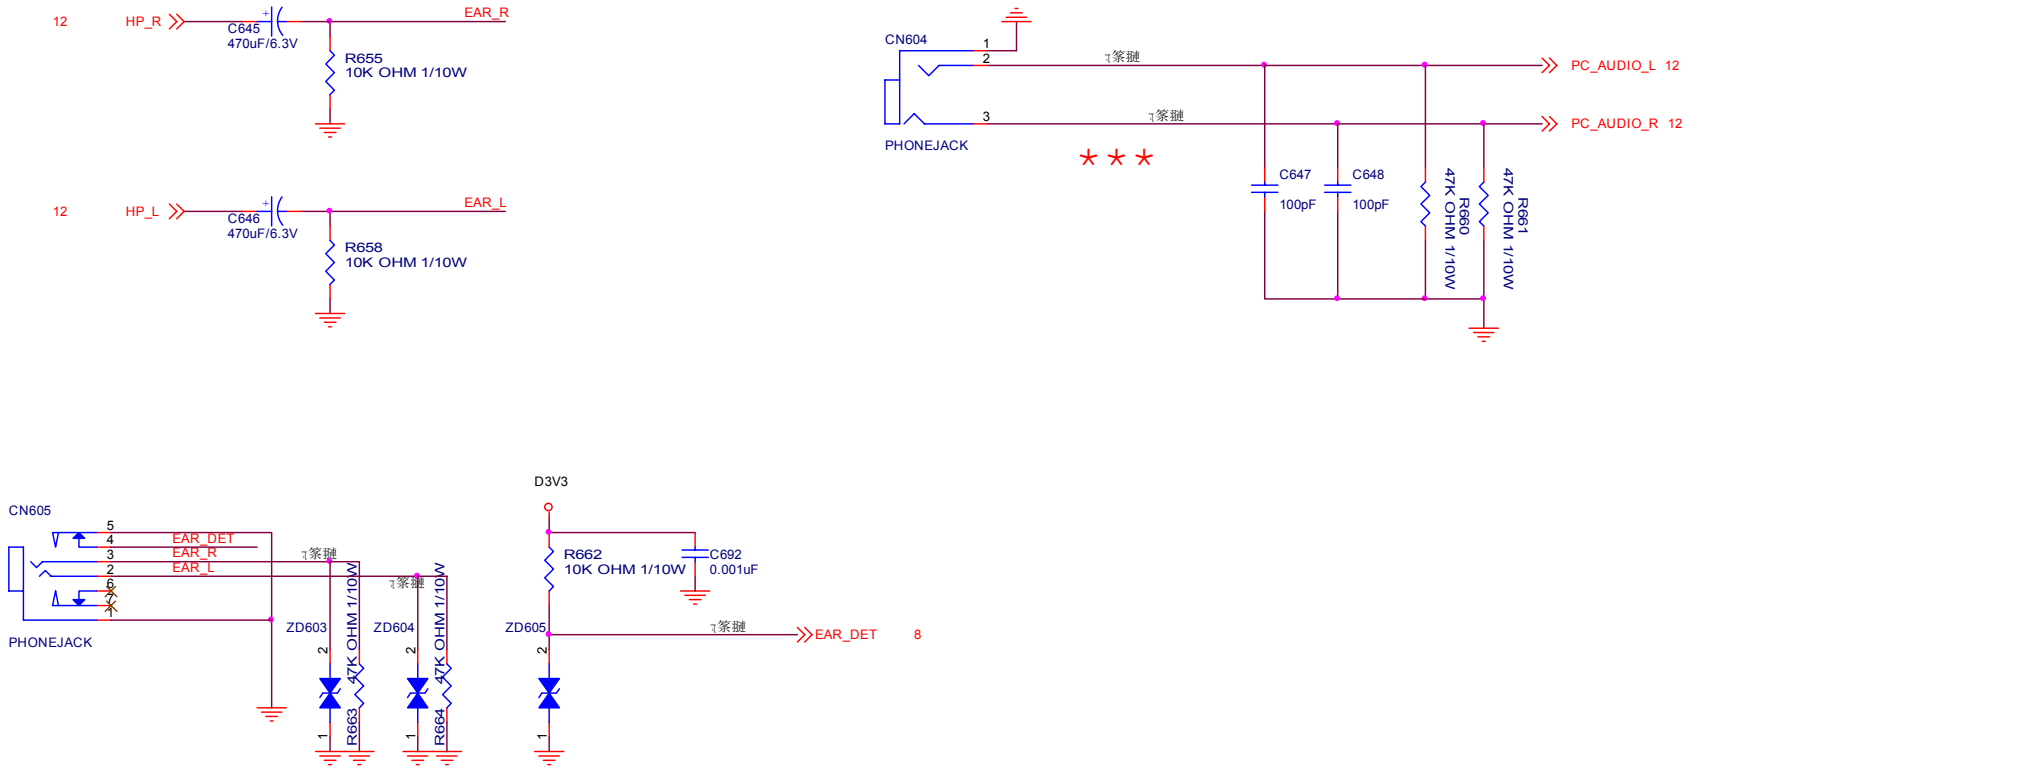

TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Viewsonic	Size	B
錫蘭瓜網膜	T2763-1-X-X-30-080909	TPV MODEL	E268MZNKWDVAN/E268MZNKFPVN	Rev
Key Component	14-Earphone/AV Output	PCB NAME	715T2763	称爹
Date	Tuesday, September 09, 2008	Sheet	14 of 18	<称爹>

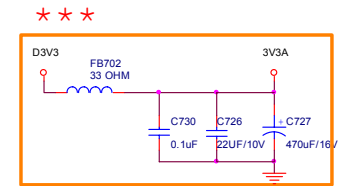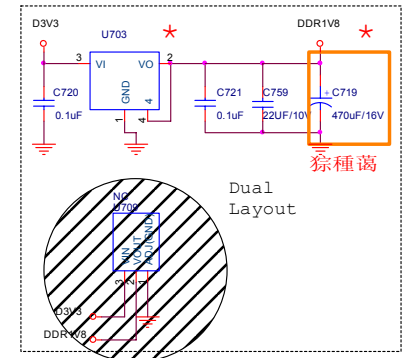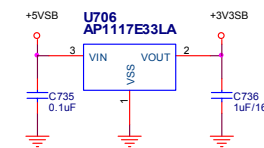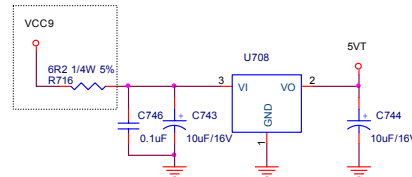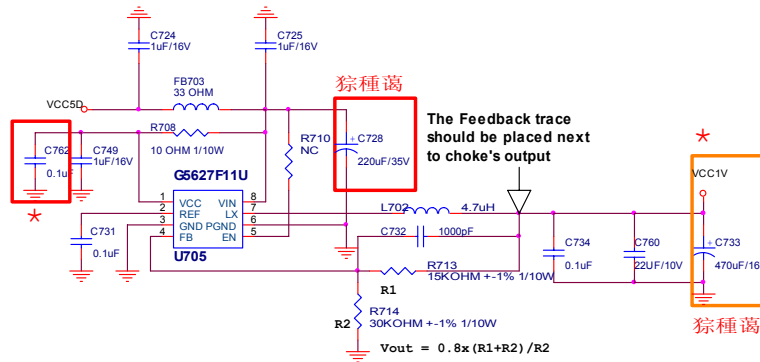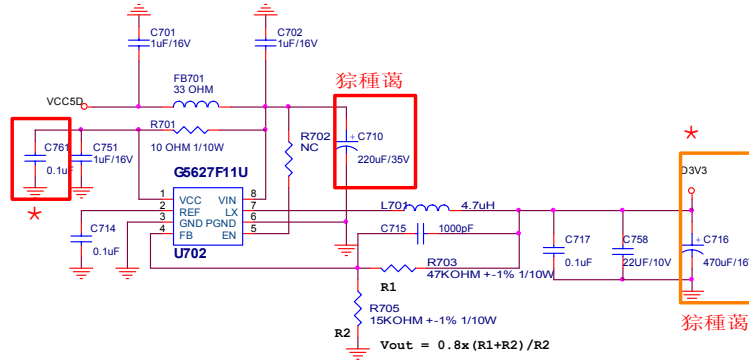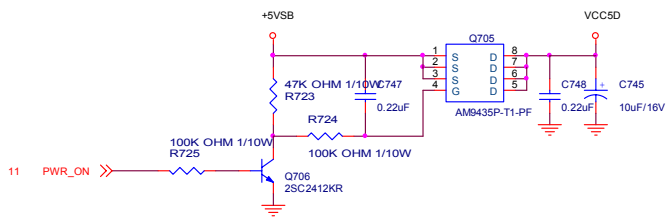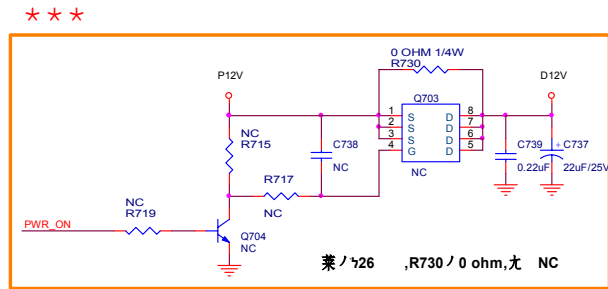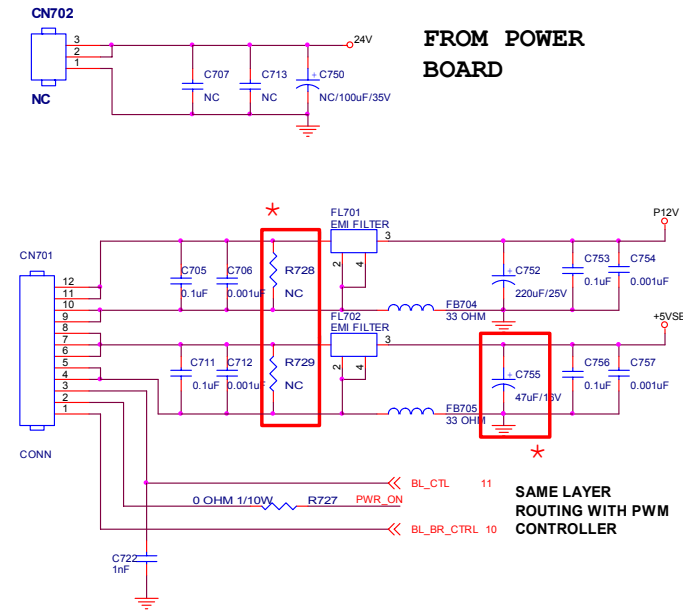

- 5,6,10,12 VCC5D
- 12 VCC9
- 3 5VT
- 11 +3V3SB
- 5,6,7,8,10,11,12,14 D3V3
- 3,8 3V3A
- 9,10 DDR1V8
- 10 VCC1V
- 13 24V




TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Viewsonic	Size	Custom
基爾瓜爾	T2763-1-X-X-30-080909	TPV MODEL	E268MZNKWDVAN/E26RMZKNPKVN	Rev
Key Component	15-Power	PCB NAME	715T2763	称
Date	Tuesday, September 09, 2008	Sheet	15 of 18	<称>



26" LCD TV

9.2 Power Board

Polaroid TLM-22601B

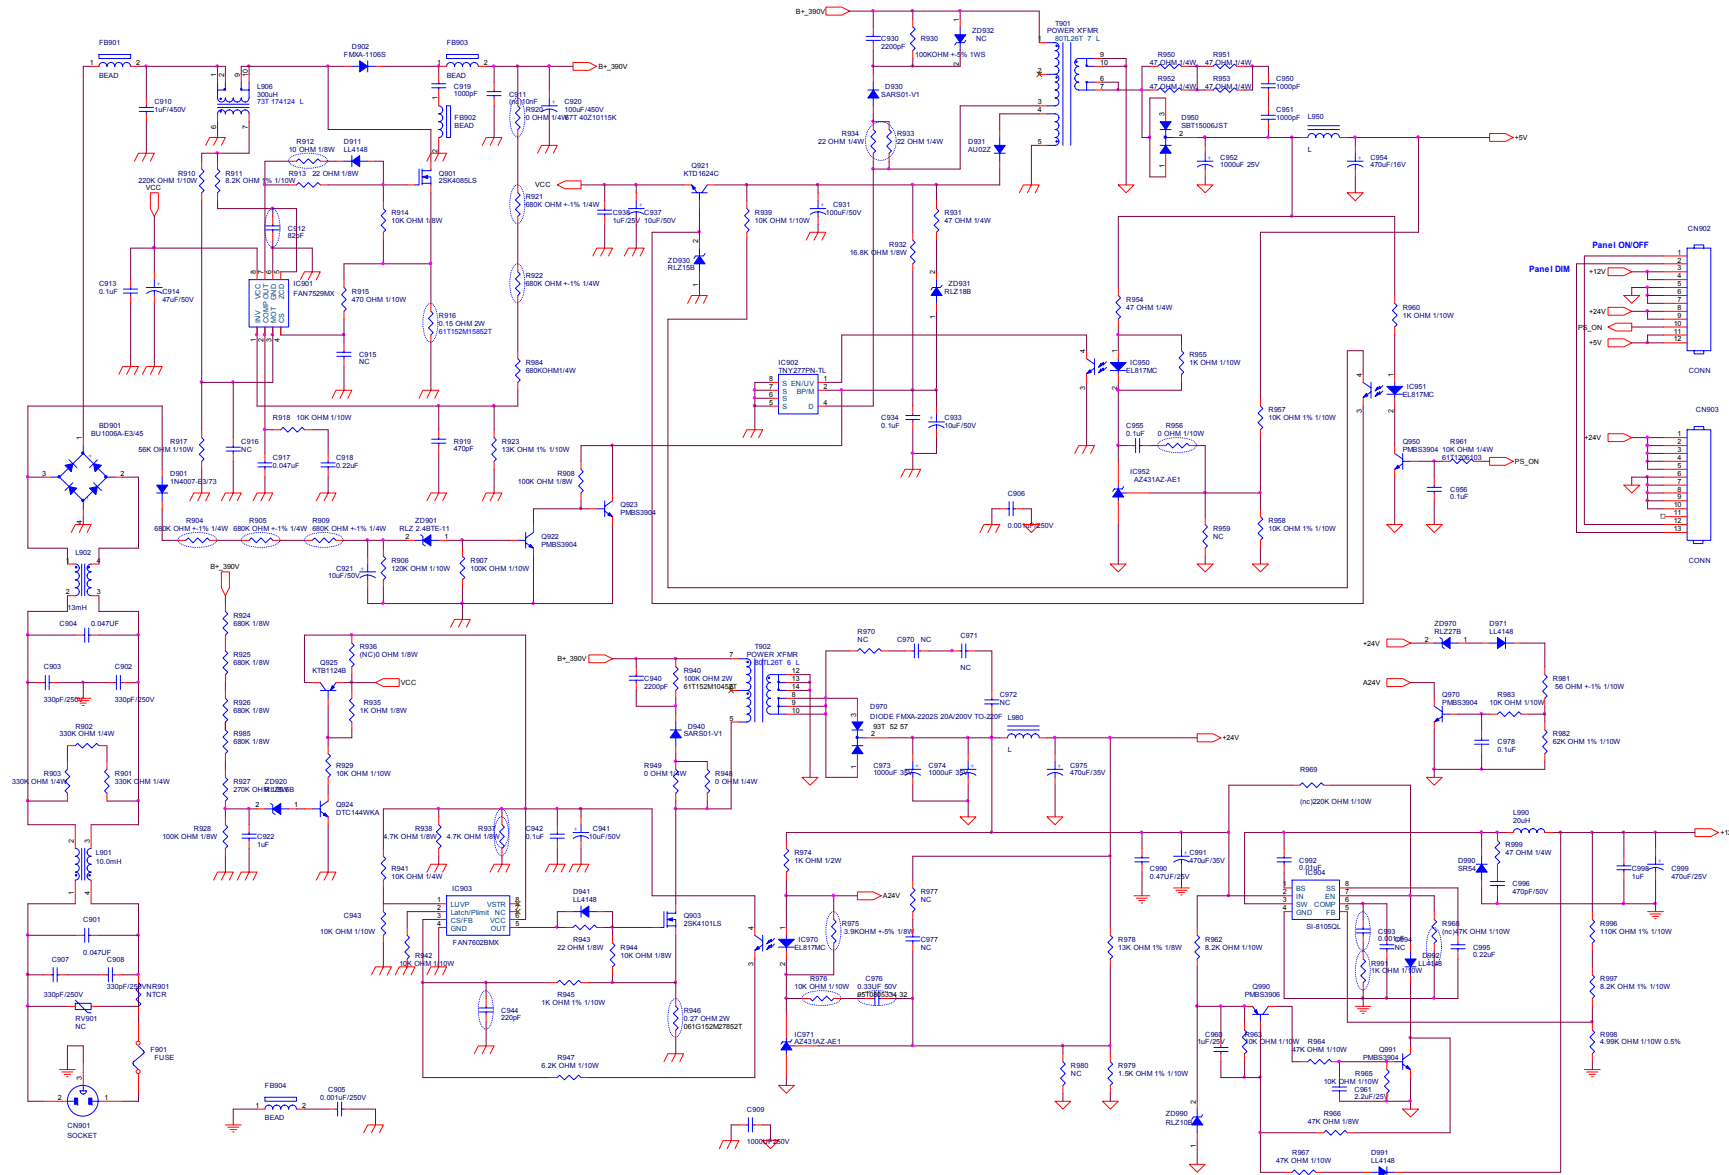


T.P.V (Top Victory Electronics Co., Ltd.)	OEM MODEL	Rev	D
品名: 电源板	TPV MODEL	Rev	A
Rev: 02 POWER	PCB NAME: 71872907_1		
Date: Thursday, January 24, 2008	Sheet: 1 of 1		

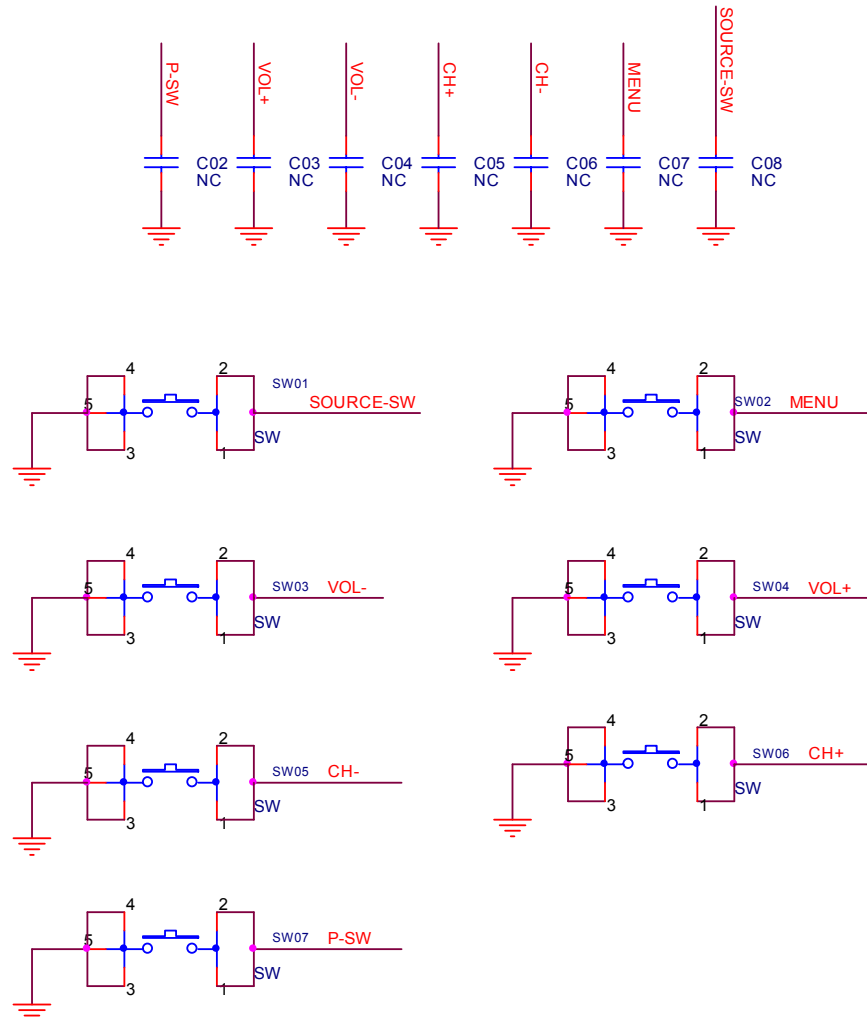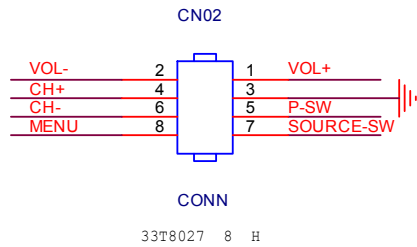

Title		
Size A	Document Number 715T2833	Rev A
Date:	Thursday, August 02, 2007	Sheet 1 of 1

10. Exploded View

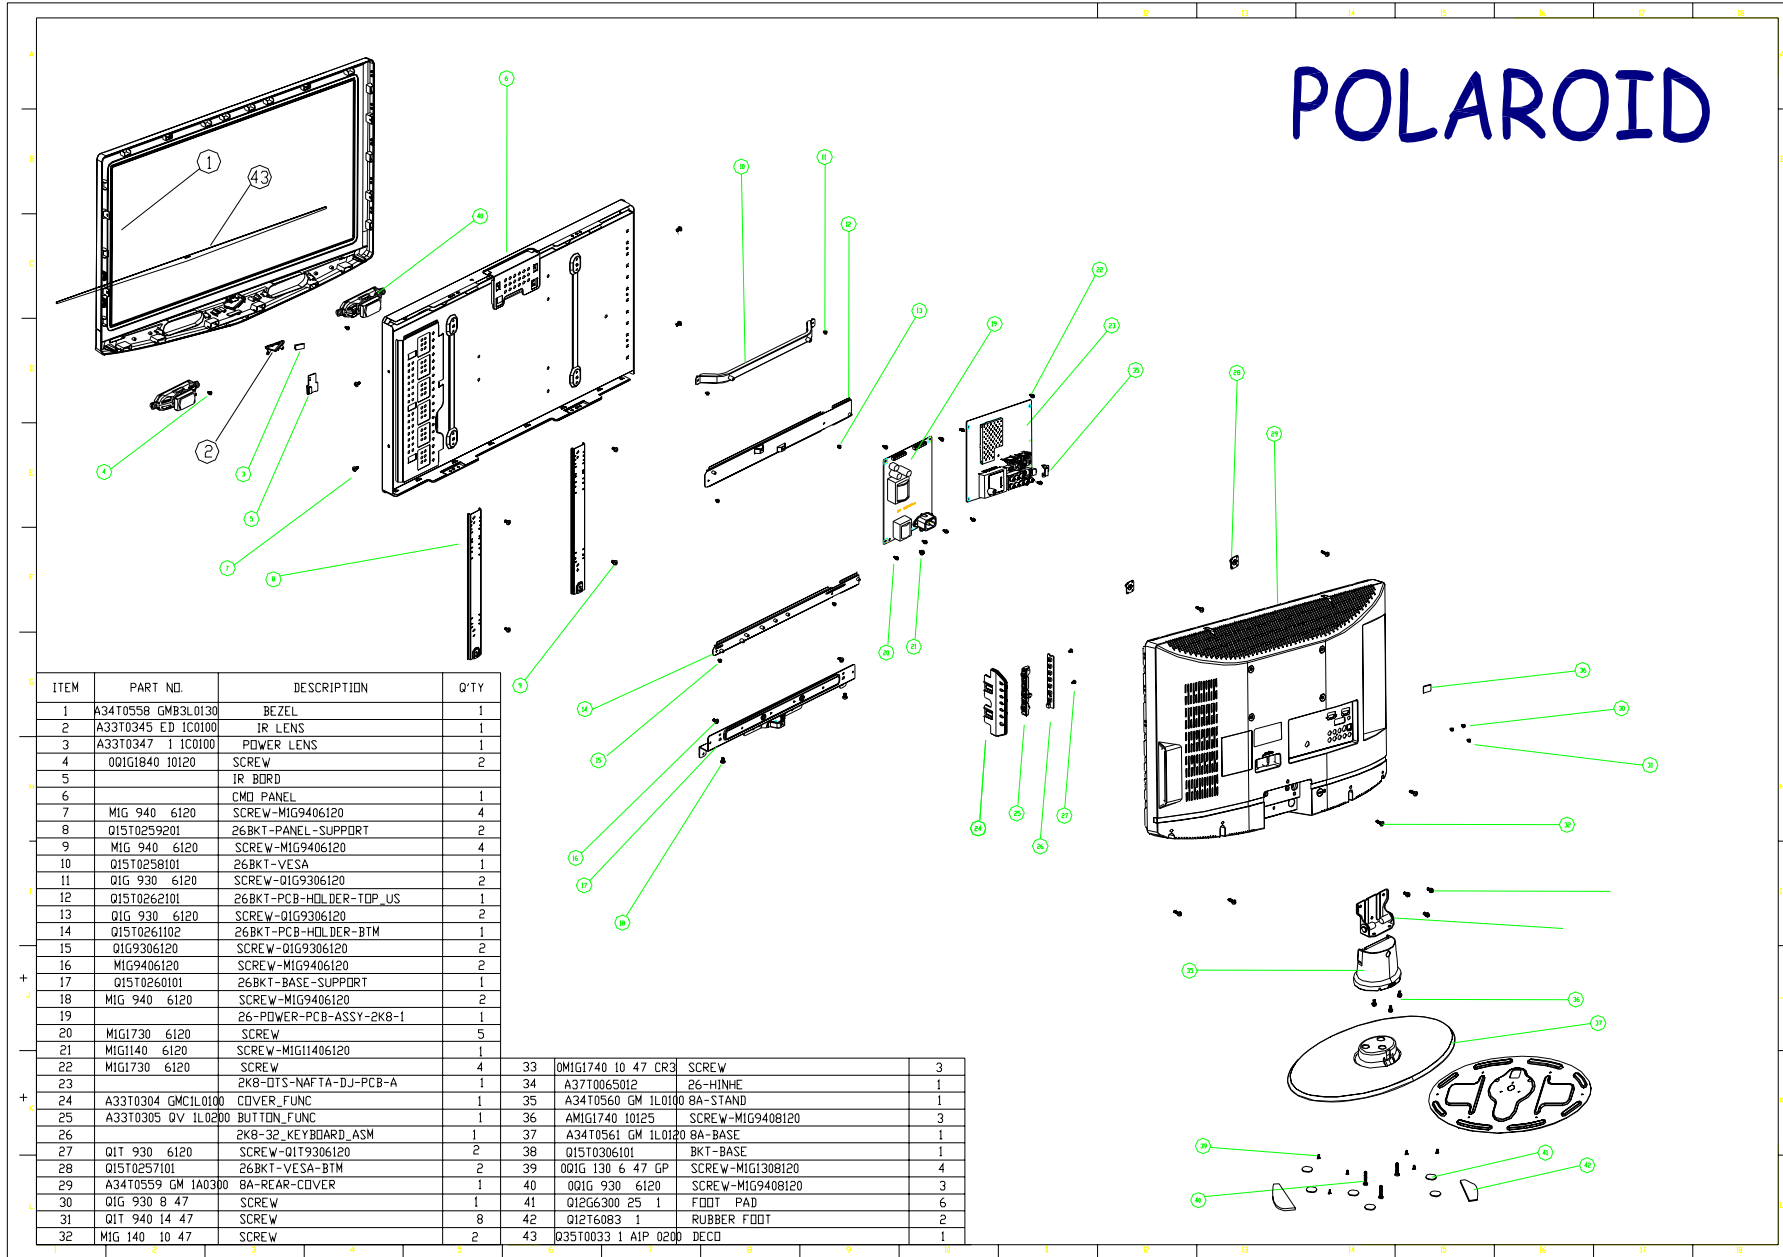

11. BOM List

E26RMZNKW9PV2N

Location	Part No.	Description	REMARK
	044G9003 3	CORNER PAPER	
	049T 51 1A	ERADICATOR	
	756TQ8CB ZK017	MAIN BAORD-CBPFRZ6KQF	
U409	056G1125701 X	IC MCU RTD2120L-LF REALTEK	
U402	056G1133103	IC M25P32-VMF6P 32M s0-16	
SMTF-U402	100TMZMF001K11	MCU ASS'Y-056G1133103	
CBPF-U409	100TMZMF002KT1	MCU ASS'Y-056G1125701 X	
	Q07T 8 5115	COMPOUND PALLET	
	Q07T 8 5116	COMPOUND PALLET	
	Q44G6002122 78	paper board	
	Q44T6002102 79	Paper board	
	Q44TE014008 2B	26" TV CARTON	
	Q50G 500518	CABLE TIE	
	040T 58162435A	LABEL	
	0Q1T 940 30 47 CR3	SCREW	
	Q41T2601008 1A	MANUAL	
	Q41T7830008 1A	stand assembly guide	
	Q41T7830008 3A	QSG	
	Q41T7830008 4A	Return Stopper Insert	
	Q41T7830008 5A	WARRANTY CARD	
	Q44G600024D 3A	carton	
	Q45G 76 28NV2 R	PE BAG FOR CLAMP	
	Q45G2007M0102A	pe bag for manual	
	040T 581654 3A	CARTON LABEL	
	Q40G 582813 3A	S/N LABEL	
	Q40T 260008 2A	RATING LABEL	
	044G6000 4 6B	SPACE PAPER	
	052G 1150 C	INSULATING TAPE	
	052G 1150 C	INSULATING TAPE	
	052G 1185 1	BIG TAPE	
	052G 1186	SMALL TAPE	
	052G 1212 A	ALUMINUM FOIL TAPE	
	052G 1213607	Conductive Tape 100mm*50mm*0.08mm	
	052G 2191 A	PAPER TAPE	
E07801	078T 495501 K	SPK 8 OHM 11w 120X30mm KUAIDA	
E07801	078T 495501 Y	SPK 8 OHM 11W 120*30mm SUNLINK	2ND SOURCE
	085T 583103	GASKET	
	089G176W30N502	FFC CABLE	
E08901	089G402A18N CX	POWER CORD	
E08901	089G402A18N IS	POWER CORD/(TPV)32-D022438	2ND SOURCE
	092TB1JX1A3WGM	BATTERY FOR ALL EXPORT MODE LR03	
	098TRABD3NEPDC	Remote control For Polaroid	
	0M1G 140 10 47 CR3	SCREW	
	0M1G 930 6 47 CR3	SCREW	
	0M1G 940 6120	SCREW (M4X6)	
	0M1G 940 6120	SCREW (M4X6)	
	0M1G1740 8125	SCREW	

	0M1G1740 10 47 CR3	SCREW	
	0Q1G 930 8 47 CR3	SCREW	
	0Q1G1840 10120	SCREW	
	0Q1T 940 14 47 CR3	SCREW	
	705TQ8SK122	SKD ASS'Y	
E09503	095T8013 4W640	HARNESS 4P-B&R+B&W	2ND SOURCE
E09503	095T8013 4X640	HARNESS 4P-B&R+B&W	
E09502	095T801312D651	WIRE HARNESS 12P(PLUG)-12P(PLUG)	2ND SOURCE
E09502	095T801312X651	WIRE HARNESS 12P(PLUG)-12P(PLUG)	
E09504	095T801413D659	WIRE HARNESS 13P-5P(300MM)+8P(400MM)	
E09504	095T801413W659	WIRE HARNESS 13P-5P(300MM)+8P(400MM)	2ND SOURCE
E09505	095T801414DH40	WIRE HARNESS 13P(PLUG)-14P	2ND SOURCE
E09505	095T801414XH40	WIRE HARNESS 13P(PLUG)-14P	
	0D1T 930 6120	SCREW	
	0D1T 930 6120	SCREW	
	0D1T 940 6120	SCREW	
	0M1G1140 6120	screw	
	0M1G1730 5120	SCREW	
	0M1G1730 8120	SCREW	
	0M1G1740 10 47 CR3	SCREW	
	0Q1T 940 14 47 CR3	SCREW	
	705TQ833036	PLASTIC ASS'Y	
	0Q1G 930 6120	SCREW 3X6MM	
	A33T0304 GMC1L0100	COVER_BUTTON	
	A33T0305 QV 1L0200	BUTTON_FUNC	
	KEPF7QAA	KEY board ASSY	
CN02	033G8027 8 H	WAFER 8P 2.0mm DIP DUAL ROWR	
SW02	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW01	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW06	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW07	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW04	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW05	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW03	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP	
	715T2833 1	KEY PCB	
	705TQ834623	BEZEL ASS'Y	
	A33T0345 ED 1C0100	ir lens-a3	
	A33T0347 1 1C0100	Power LENS-a3	
	A34T0558 GMH3L0130	BEZEL TV26W-8A3	
	705TQ834624	STAND ASS'Y	
	0Q1G 130 6 47 GP	SCREW	
	A34T0560 GM 1L0100	Stand	
	A34T0561 GM 1L0120	Base_S1	
	A37T0065012	HINGE	
	AM1G1740 10125	SCREW	
	Q12G6300 25 1	RUBBER FOOT	
	Q12T6083 1	RUBBER FOOT	
	Q15T0306101	26bkt-base_A1	
	705TQ834655	REAR COVER ASS'Y	
	A34T0559 GM	Rear Cover 26	

	1A0300		
	Q15T0257101	26bkt-vesa-btm	
	Q36T 600 18134	NONWOVEN FABRIC	
	Q36T 600 37 1 GP	NONWOVEN FABRIC	
	Q36T 600 40 1	NONWOVEN FABRIC	
	Q36T 600 40 1	NONWOVEN FABRIC	
	A15T0306101	Side Cover-NAFTA	
	ADTV82412QA1	POWER BAORD	
	040G 45762412B	CBPC LABEL	
	009T6005 1	GROUND TERMINAL	
CN902	033G380212B Y	WAFER	
CN903	033T380213B Y	CONNECTOR	
IC950	056G 139 7	IC EL817MC M-TYPE	
IC970	056G 139 7	IC EL817MC M-TYPE	
IC951	056G 139 7	IC EL817MC M-TYPE	
IC902	056G 581 7	IC TNY277PN DIP-8C	
IC904	056T 563134	IC SI-8105QL DIP-8	
NR901	061G 58030 W	NTCR 3 Ω 5A	
R970	061G152M33952T	RST MOFR 3.3 OHM +-5% 2WS	
C904	063G107K474 US	0.47UF +-10%	
C901	063G107K474 US	0.47UF +-10%	
C910	063G213J105GFA	MPF CAP	
C911	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5P	
C905	065G306M1022B2	1000pf 400vac/250vac y1	
C906	065G306M1022B2	1000pf 400vac/250vac y1	
C908	065T306K3312BP	330PF K 250VAC	
C907	065T306K3312BP	330PF K 250VAC	
C909	065T306K3312F2	Y1 330PF K 250VAC	
C903	065T306K6812BP	Y1 680PF M 250VAC	
C902	065T306K6812BP	Y1 680PF M 250VAC	
C952	067G204V331 3K	CS CAP 330uF 16V 10*12 mm	
C974	067G215A1026KV	EC 1000uF 35V 12.5*25mm	
C973	067G215A1026KV	EC 1000uF 35V 12.5*25mm	
C999	067G215A4714KV	EC 470uF 25V 10*16mm	
C991	067G215A4716KV	EC 470uF 35V M 10*16mm	
C975	067G215A4716KV	EC 470uF 35V M 10*16mm	
C920	067G215S10115N	PAG450VB100-M-L18*35.5MM	
FB901	071G 55 21	FERRITE BEAD	
FB903	071T 55 26 S	FERRITE CORE	
FB904	071T 55 26 S	FERRITE CORE	
L980	073G 253 91 V	CHOKE COIL 3.5uH+-10%	
L950	073G 253 91 V	CHOKE COIL 3.5uH+-10%	
L990	073G 253194 L	CHOKE COIL 20uH CC-008064	
L901	073T 174106 V	LINE FILTER 13mH MIN	
L902	073T 174106 V	LINE FILTER 13mH MIN	
L906	073T 174124 L	PFC CHOKE 300uH PT-009584	
T902	080TL26T 6 L	X'FMR 370uH PT-009411-1	
T901	080TL26T 7 L	X'FMR 260uH PT-009486	
CN901	087T 501 44 DL	AC SOCKET 3PIN + 2 SCREW Hole V/T	
	705TQ793028	D970 ASS'Y	
D970	093G 52 57	DIODE FMXA-2202S 20A/200V TO-220F	

	0M1G1730 8120	SCREW	
	Q90T0095 2	HEAT SINK	
	705TQ793029	BD901 ASS'Y	
	090T 425502	HEAT SINK	
BD901	093G 50460 39	BRIDGE BU1006A-E3/45 10A/600V BU	
	0M1G1730 8120	SCREW	
	705TQ793030	D950 ASS'Y	
	090G6084 1	HEAT SINK	
D950	093G 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
	0M1G1730 8120	SCREW	
	705TQ793031	Q901&D902 ASS'Y	
Q901	057G 667 55	FET 2SK4087LS 14A/600V TO-220FI(LS)	
D902	093G 220 33	DIODE FMXA-1106S	
	0M1G1730 8120	SCREW	
	Q90T0095 2	HEAT SINK	
	705TQ857008	Q903 ASS'Y	
Q903	057G 667 21	STP10NK70ZFP	
	090T 425502	HEAT SINK	
	0M1G1730 8120	SCREW	
IC901	056G 368 12	IC FAN7529MX SOP-8	
IC903	056G 379101	IC FAN7602BMX SOP-8	
Q950	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q970	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q923	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q922	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q924	057G 760 5	DTC144WKA BY ROHM SMT	
Q921	057G 761 11	TRA KTD1624C SOT-89 KEC	
Q925	057G 761 12	TRA KTB1124B SOT-89 KEC	
R956	061G0603000	RST CHIP MAX 0R05 1/10W	
R945	061G0603100 1F	RST CHIPR 1 KOHM +-1% 1/10W	
R958	061G0603100 2F	RST CHIPR 10K OHM +-1% 1/10W	
R957	061G0603100 2F	RST CHIPR 10K OHM +-1% 1/10W	
R955	061G0603102	RST CHIPR 1K OHM +-5% 1/10W	
R960	061G0603102	RST CHIPR 1K OHM +-5% 1/10W	
R991	061G0603102	RST CHIPR 1K OHM +-5% 1/10W	
R918	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R929	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R939	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R942	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R983	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R971	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R976	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R907	061G0603104	RST CHIPR 100 KOHM +-5% 1/10W	
R996	061G0603110 3F	RST CHIPR 110KOHM +-1% 1/10W	
R906	061G0603124	RST CHIPR 120 KOHM +-5% 1/10W	
R923	061G0603130 2F	RST CHIPR 13 KOHM +-1% 1/10W	
R979	061G0603150 1F	RST CHIPR 1.5 KOHM +-1% 1/10W	
R910	061G0603224	RST CHIPR 220 KOHM +-5% 1/10W	
R915	061G0603471	RST CHIPR 470 OHM +-5% 1/10W	
R998	061G0603499 1D	RST CHIPR 4.99K OHM +-0.5% 1/10W	
R981	061G0603560 9F	RST CHIPR 56 OHM +-1% 1/10W	

R917	061G0603563	RST CHIPR 56 KOHM +-5% 1/10W	
R982	061G0603620 2F	RST CHIPR 62 KOHM +-1% 1/10W	
R947	061G0603622	RST CHIPR 6.2 KOHM +-5% 1/10W	
R997	061G0603820 1F	RST CHIPR 8.2 KOHM +-1% 1/10W	
R911	061G0603820 1F	RST CHIPR 8.2 KOHM +-1% 1/10W	
R912	061G0805100	RST CHIPR 10 OHM +-5% 1/8W	
R943	061G0805101	1ST CHIPR 100 OHM +-5% 1/8W	
R935	061G0805102	RST CHIPR 1K OHM +-5% 1/8W	
R914	061G0805103	RST CHIPR 10K OHM +-5% 1/8W	
R944	061G0805103	RST CHIPR 10K OHM +-5% 1/8W	
R908	061G0805104	RST CHIPR 100K OHM +-5% 1/8W	
R928	061G0805104	RST CHIPR 100K OHM +-5% 1/8W	
R978	061G0805130 2F	RST CHIP 13K 1/8W 1%	
R913	061G0805220	RST CHIPR 22 OHM +-5% 1/8W	
R927	061G0805274	RST CHIPR 270 KOHM +-5% 1/8W	
R975	061G0805392	3.9 KOHM 1/10W	
R937	061G0805472	RST CHIPR 4.7 KOHM +-5% 1/8W	
R938	061G0805472	RST CHIPR 4.7 KOHM +-5% 1/8W	
R985	061G0805684	680K/0805	
R926	061G0805684	680K/0805	
R925	061G0805684	680K/0805	
R924	061G0805684	680K/0805	
RJ901	061G1206000	RST CHIP MAX 0R05 1/4W	
R920	061G1206000	RST CHIP MAX 0R05 1/4W	
RJ902	061G1206000	RST CHIP MAX 0R05 1/4W	
R941	061G1206103	RST CHIPR 10K OHM +-5% 1/4W	
R961	061G1206103	RST CHIPR 10K OHM +-5% 1/4W	
R933	061G1206220	RST CHIPR 22 OHM +-5% 1/4W	
R934	061G1206220	RST CHIPR 22 OHM +-5% 1/4W	
R901	061G1206334	RST CHIPR 330KOHM +-5% 1/4W	
R903	061G1206334	RST CHIPR 330KOHM +-5% 1/4W	
R902	061G1206334	RST CHIPR 330KOHM +-5% 1/4W	
R931	061G1206470	RST CHIPR 47 OHM +-5% 1/4W	
R951	061G1206470	RST CHIPR 47 OHM +-5% 1/4W	
R953	061G1206470	RST CHIPR 47 OHM +-5% 1/4W	
R999	061G1206470	RST CHIPR 47 OHM +-5% 1/4W	
R954	061G1206470	RST CHIPR 47 OHM +-5% 1/4W	
R952	061G1206470	RST CHIPR 47 OHM +-5% 1/4W	
R950	061G1206470	RST CHIPR 47 OHM +-5% 1/4W	
R984	061G1206680 3F	RST CHIPR 680KOHM +-1% 1/4W	
R922	061G1206680 3F	RST CHIPR 680KOHM +-1% 1/4W	
R921	061G1206680 3F	RST CHIPR 680KOHM +-1% 1/4W	
R909	061G1206680 3F	RST CHIPR 680KOHM +-1% 1/4W	
R905	061G1206680 3F	RST CHIPR 680KOHM +-1% 1/4W	
R904	061G1206680 3F	RST CHIPR 680KOHM +-1% 1/4W	
R932	061T0805168 2F	CHIP 16.8K OHM 1/8W 1%	
C993	065G0603102 31	CHIP 1000PF 50V NPO	
C978	065G0603104 32	CHIP 0.1UF 50V X7R	
C956	065G0603104 32	CHIP 0.1UF 50V X7R	
C955	065G0603104 32	CHIP 0.1UF 50V X7R	
C942	065G0603104 32	CHIP 0.1UF 50V X7R	

C934	065G0603104 32	CHIP 0.1UF 50V X7R	
C913	065G0603104 32	CHIP 0.1UF 50V X7R	
C944	065G0603221 31	CER1 0603 NP0 50V 220P P	
C995	065G0603224 32	CHIP 0.22UF 50V X7R	
C918	065G0603224 32	CHIP 0.22UF 50V X7R	
R919	065G0603471 31	CAP:CER 470PF 5%50V SMT 0603	
C917	065G0603473 32	CHIP 0.047UF 50V X7R	
C943	065G0603473 32	CHIP 0.047UF 50V X7R	
C912	065G0603820 31	0603 82PF +-5%, 50V NPO	
C951	065G0805102 31	CAP CHIP 0805 1000PF J 50V NPO	
C950	065G0805102 31	CAP CHIP 0805 1000PF J 50V NPO	
C992	065G0805103 32	CAP CHIP 0805 10NF K 50V X7R	
C998	065G0805105 37	CHIP 1UF 50V Y5V	
C922	065G0805105 37	CHIP 1UF 50V Y5V	
C976	065G0805334 32	CHIP 0.33UF 50V X7R	
C996	065G0805471 31	CHIP 470PF 50V NPO	
C990	065G0805474 32	0.47UF +-10% 50V X7R	
C938	065T0603105 25	CHIP 1uF 25V X5R	
C970	065T080533242H	CAP CHIP 0805 3300pF K 100V X7R	
C971	065T080533242H	CAP CHIP 0805 3300pF K 100V X7R	
C972	065T080533242H	CAP CHIP 0805 3300pF K 100V X7R	
D911	093G 6432V	LL4148-GSO8	
D971	093G 6432V	LL4148-GSO8	
D941	093G 6432V	LL4148-GSO8	
ZD930	093G 39S 15 T	RLZ15B LLDS	
ZD920	093G 39S 24 T	RLZ 5.6B LLDS	
ZD970	093G 39S 42 T	RLZ27B LLDS	
ZD931	093G 39S 44 T	RLZ18B LLDS	
ZD901	093G 39S103 T	DIODE RLZ 2.4BTE-11 500mW/2.4V LL-34	
D990	093G5004 1	SR54 T0-214AA	
T902	006G 31 4	1.7MM RIVET	
CN901	006G 31501	EYELET	
IC971	056G 158 10 T	IC AS431AZTR-E1 TO-92	
IC952	056G 158 10 T	IC AS431AZTR-E1 TO-92	
R940	061G152M10452T	RST MOFR 100KOHM +-5% 2WS	
R946	061G152M27852T	RST MOFR 0.27 OHM +-5% 2WS	
R974	061G175L10252T	1KOHM +-5% 1/2W	
R930	061G208M10452T	RST MOF 100K 5% 1W	
R916	061T152M15852T	RST MOFR 0.15 OHM +-5% 2WS	
C940	065G 1K222 5T6213	CER CAP 2200PF K 1KV TDK	
C930	065G 1K222 5T6213	CER CAP 2200PF K 1KV TDK	
C941	067G215A1007KT	EC 10uF 50V M 5*11mm	
C937	067G215A1007KT	EC 10uF 50V M 5*11mm	
C921	067G215A1007KT	EC 10uF 50V M 5*11mm	
C931	067G215A1017KT	EC 100uF 50V 8*12mm	
C914	067G215A4707KT	EC 47uF 50V 6.3*11mm	
C954	067G215A4712KT	EC 470uF 10V 8*12.5mm	
F901	084G 55 7 B	FUSE 3.15A 250V BUSSMANN	
D901	093G 52 1552T	DIODE 1N4007-E3/54 1A/1000V DO-41	
D931	093G 5250S52T	DIODE AU02Z-V1 SANKEN	
D940	093T1080 252T	diode sarso1-v1 sanken	

D930	093T1080 252T	diode sarso1-v1 sanken	
	715T2907 2	POWER PCB	
	006G 31 4	1.7MM RIVET	
	Q51G 6 4509	GLUE_RTV	
	040T 457624 1B	CPU LABEL	
	040T 45762412B	CBPC LABEL	
	012G6051 2	THERMAL PAD	
CN601	033G3278 4	4P PLUG B4B-XHA/JST	
CN405	033G801930F CH JS	CONNECTOR	
CN701	033T327812D	WAFER 12P PLUG	
CN404	033T380213B Y L	CONNECTOR 13P 2.0	
C634	067G215S1024KV	EC 105°C CAP 1000UF M 25V	
CN605	088G 30211K	PHONE JACK 5PIN	
CN202	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN203	088T 78 V6 C	RCA JACK 2*3 VERTICAL TYPE	
CN604	088T 30252C	PHONE JACK 3.5mm 3p V/A GREEN	
CN204	088T 35315FVSD	D-SUB 15PIN VERTICAL CONNECTOR	
CN603	088T 359 5 JT	FIBER-OPTIC 3P V/T JST1227	
CN201	088T100Z 5A CL	5 PIN MINI DIN JACK	
X402	093G 2245B J1	XTL NXS24.000AC12F-KAB3 12pf 30ppm	
X401	093T 2262B J	CRYSTAL NXS25.000 AC 20PF HC-49/US NSK	
TU202	094TNTAT MA 7M	TUNER NTSC+ATSC ENV56R01D8F	
C659	064G701J4740AT	0.47uF 50V	
C640	064G701J4740AT	0.47uF 50V	
C733	067G 2046812KT	CS CAP 680uF 10V 8*11 mm	
C719	067G 2046812KT	CS CAP 680uF 10V 8*11 mm	
C716	067G 2046812KT	CS CAP 680uF 10V 8*11 mm	
C744	067G 305100 3T	10UF 16V	
C743	067G 305100 3T	10UF 16V	
C620	067G 305100 3T	10UF 16V	
C619	067G 305100 3T	10UF 16V	
C618	067G 305100 3T	10UF 16V	
C614	067G 305100 3T	10UF 16V	
C611	067G 305100 3T	10UF 16V	
C610	067G 305100 3T	10UF 16V	
C608	067G 305100 3T	10UF 16V	
C605	067G 305100 3T	10UF 16V	
C603	067G 305100 3T	10UF 16V	
C4C3	067G 305100 3T	10UF 16V	
C627	067G 305220 4T	105°C 22UF, +-20% 25V	
C737	067G 305220 4T	105°C 22UF, +-20% 25V	
C745	067G 305220 4T	105°C 22UF, +-20% 25V	
C448	067G 305220 4T	105°C 22UF, +-20% 25V	
C615	067G 305470 3T	47UF +-20% 16V	
C755	067G 305470 3T	47UF +-20% 16V	
C645	067G 305471 1T	105°C RADIAL E-CAPACTOR 470uF 6.3V	
C646	067G 305471 1T	105°C RADIAL E-CAPACTOR 470uF 6.3V	
C727	067G 305471 1T	105°C RADIAL E-CAPACTOR 470uF 6.3V	
C245	067G 305471 3T	105°C 470UF +-20% 16V	
C752	067G215B221 4T	105°C RADIAL E-CAPACTOR 220uF 25V	

C728	067G215B221 4T	105°C RADIAL E-CAPACTOR 220uF 25V	
C710	067G215B221 4T	105°C RADIAL E-CAPACTOR 220uF 25V	
L601	073G 259901 T	CHOKE 22uH 10% TSL0808RA-220K1R7	
L602	073G 259901 T	CHOKE 22uH 10% TSL0808RA-220K1R7	
L603	073G 259901 T	CHOKE 22uH 10% TSL0808RA-220K1R7	
L604	073G 259901 T	CHOKE 22uH 10% TSL0808RA-220K1R7	
FL701	053T 43 1	FILTER BULLWILL	
FL702	053T 43 1	FILTER BULLWILL	
U705	056G 379 92	IC G5627F11U SOP-8(FD)	
U702	056G 379 92	IC G5627F11U SOP-8(FD)	
U703	056G 563113	IC G1117-18T63Uf 1A/1.8V SOT-223	
U407	056G 563135	IC G952T24Uf SOT-89	
U708	056G 585 9	IC AP1117E50LA ANACHIP	
U405	056G 585 10	IC AP1117ELA-ADJ	
U706	056G 585 4A	IC AP1117E33L-13	
U406	056G 615 67	IC NT5TU32M16CG-25C 512MB BGA-84	
U602	056G 647 23	IC WM8594SEFT/RV TQFP-48	
U502	056G 662 11	IC CM2031-A0TR TSSOP-38	
U409	056G1125701 X	IC MCU RTD2120L-LF REALTEK	
U202	056G1133 34	M24C02-WMN6TP	
U402	056G1133103	IC M25P32-VMF6P 32M s0-16	
U403	056G113353A	IC M24C32-WMN6T SO-8 ST	
U204	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U203	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U707	056T 133 23 R	BA17809FP-E2	
U601	056T 593 31	IC STA559BW13TR PowerSSO36	
U401	056T1126 32	IC ZR39770BGCF BGA-632	
Q409	057G 417512	MMBT3906	
Q408	057G 417512	MMBT3906	
Q407	057G 417512	MMBT3906	
Q705	057G 763 3B	AM9435P.T1-PF SO-8	
Q401	057G 763 3B	AM9435P.T1-PF SO-8	
Q402	057G 765 1	2SC2412K	
Q403	057G 765 1	2SC2412K	
Q404	057G 765 1	2SC2412K	
Q410	057G 765 1	2SC2412K	
Q411	057G 765 1	2SC2412K	
Q602	057G 765 1	2SC2412K	
Q706	057G 765 1	2SC2412K	
R4C1	061G0603000	RST CHIP MAX 0R05 1/10W	
R4B8	061G0603000	RST CHIP MAX 0R05 1/10W	
R727	061G0603000	RST CHIP MAX 0R05 1/10W	
R653	061G0603000	RST CHIP MAX 0R05 1/10W	
R651	061G0603000	RST CHIP MAX 0R05 1/10W	
R649	061G0603000	RST CHIP MAX 0R05 1/10W	
R634	061G0603000	RST CHIP MAX 0R05 1/10W	
R501	061G0603000	RST CHIP MAX 0R05 1/10W	
R4F8	061G0603000	RST CHIP MAX 0R05 1/10W	
R4B1	061G0603000	RST CHIP MAX 0R05 1/10W	
R451	061G0603000	RST CHIP MAX 0R05 1/10W	
R208	061G0603000	RST CHIP MAX 0R05 1/10W	

R701	061G0603100	RST CHIPR 10 OHM +5% 1/10W	
R708	061G0603100	RST CHIPR 10 OHM +5% 1/10W	
R257	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4A2	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R402	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R452	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R429	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R411	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R262	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R454	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4A3	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4A4	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4A5	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4A6	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R412	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R635	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R628	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4G3	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4F9	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4E7	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4C6	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4C3	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4A8	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R4A7	061G0603101	RST CHIPR 100 OHM +5% 1/10W	
R259	061G0603102	RST CHIPR 1K OHM +5% 1/10W	
R283	061G0603102	RST CHIPR 1K OHM +5% 1/10W	
R403	061G0603102	RST CHIPR 1K OHM +5% 1/10W	
R405	061G0603102	RST CHIPR 1K OHM +5% 1/10W	
R406	061G0603102	RST CHIPR 1K OHM +5% 1/10W	
R484	061G0603102	RST CHIPR 1K OHM +5% 1/10W	
R4D3	061G0603102	RST CHIPR 1K OHM +5% 1/10W	
R4D6	061G0603102	RST CHIPR 1K OHM +5% 1/10W	
R4H3	061G0603102	RST CHIPR 1K OHM +5% 1/10W	
R4H6	061G0603102	RST CHIPR 1K OHM +5% 1/10W	
R4B7	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R4B6	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R4B5	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R4A1	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R499	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R498	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R497	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R496	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R495	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R494	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R424	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R278	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R673	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R662	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R658	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R655	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	
R633	061G0603103	RST CHIPR 10 KOHM +5% 1/10W	

R614	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R522	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R510	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R4H1	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R4G7	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R4C5	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R4C4	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R724	061G0603104	RST CHIPR 100 KOHM +-5% 1/10W	
R725	061G0603104	RST CHIPR 100 KOHM +-5% 1/10W	
R428	061G0603105	RST CHIPR 1M OHM +-5% 1/10W	
R445	061G0603120 0F	RST CHIPR 120 OHM +-1% 1/10W	
R713	061G0603150 2F	RST CHIPR 15 KOHM +-1% 1/10W	
R705	061G0603150 2F	RST CHIPR 15 KOHM +-1% 1/10W	
R4C9	061G0603152	RST CHIPR 1.5 KOHM +-5% 1/10W	
R4D1	061G0603152	RST CHIPR 1.5 KOHM +-5% 1/10W	
R444	061G0603200 0F	RST CHIPR 200 OHM +-1% 1/10W	
R4D9	061G0603201	RST CHIPR 200 OHM +-5% 1/10W	
R274	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R275	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R276	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R277	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R408	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R4G1	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R4G2	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R4G4	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R611	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R647	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R648	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R668	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R669	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R6A6	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R6A7	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R646	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R645	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R623	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R622	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R621	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R620	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R619	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R618	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R617	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R616	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R615	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R612	061G0603220	RST CHIPR 22 OHM +-5% 1/10W	
R642	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W	
R515	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W	
R4B4	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W	
R272	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W	
R269	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W	
R267	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W	
R266	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W	

R211	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W	
R489	061G0603223	RST CHIPR 22 KOHM +-5% 1/10W	
R714	061G0603300 2F	RST CHIPR 30 KOHM +-1% 1/10W	
R270	061G0603301	RST CHIPR 300 OHM +-5% 1/10W	
R273	061G0603301	RST CHIPR 300 OHM +-5% 1/10W	
R254	061G0603330	RST CHIPR 33 OHM +-5% 1/10W	
R255	061G0603330	RST CHIPR 33 OHM +-5% 1/10W	
R449	061G0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R637	061G0603339	RST CHIPR 3.3 OHM +-5% 1/10W	
R650	061G0603339	RST CHIPR 3.3 OHM +-5% 1/10W	
R521	061G0603390 0F	RST CHIPR 390 OHM +-1% 1/10W	
R511	061G0603390 0F	RST CHIPR 390 OHM +-1% 1/10W	
R203	061G0603390 1F	RST CHIPR 3.9 KOHM +-1% 1/10W	
R410	061G0603470	RST CHIPR 47 OHM +-5% 1/10W	
R421	061G0603470	RST CHIPR 47 OHM +-5% 1/10W	
R422	061G0603470	RST CHIPR 47 OHM +-5% 1/10W	
R423	061G0603470	RST CHIPR 47 OHM +-5% 1/10W	
R703	061G0603470 2F	RST CHIPR 47 KOHM +-1% 1/10W	
R426	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R425	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R419	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R418	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R417	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R416	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R415	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R414	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R409	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R407	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R404	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R401	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R261	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R260	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R210	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R432	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R631	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R630	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R629	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R627	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R626	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R624	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R520	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R4E1	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R4B2	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R4A9	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R442	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R441	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R431	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R430	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R427	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R4E4	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	
R509	061G0603472	RST CHIPR 4.7K OHM +-5% 1/10W	

R233	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R234	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R245	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R246	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R488	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R491	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R4G9	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R660	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R661	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R663	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R664	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R723	061G0603473	RST CHIPR 47 KOHM +-5% 1/10W	
R459	061G0603510 0F	RST CHIPR 510OHM +-1% 1/10W	
R202	061G0603512	RST CHIPR 5.1 KOHM +-5% 1/10W	
R280	061G0603512	RST CHIPR 5.1 KOHM +-5% 1/10W	
R281	061G0603512	RST CHIPR 5.1 KOHM +-5% 1/10W	
R450	061G0603620 2F	RST CHIPR 62 KOHM +-1% 1/10W	
R250	061G0603750 9F	RST CHIPR 75 OHM +-1% 1/10W	
R244	061G0603750 9F	RST CHIPR 75 OHM +-1% 1/10W	
R243	061G0603750 9F	RST CHIPR 75 OHM +-1% 1/10W	
R242	061G0603750 9F	RST CHIPR 75 OHM +-1% 1/10W	
R232	061G0603750 9F	RST CHIPR 75 OHM +-1% 1/10W	
R229	061G0603750 9F	RST CHIPR 75 OHM +-1% 1/10W	
R228	061G0603750 9F	RST CHIPR 75 OHM +-1% 1/10W	
R251	061G0603750 9F	RST CHIPR 75 OHM +-1% 1/10W	
R252	061G0603750 9F	RST CHIPR 75 OHM +-1% 1/10W	
R448	061G0603750 9F	RST CHIPR 75 OHM +-1% 1/10W	
R503	061G0603752	RST CHIPR 7.5 KOHM +-5% 1/10W	
R507	061G0603752	RST CHIPR 7.5 KOHM +-5% 1/10W	
R519	061G0603752	RST CHIPR 7.5 KOHM +-5% 1/10W	
R518	061G0603752	RST CHIPR 7.5 KOHM +-5% 1/10W	
R506	061G0603752	RST CHIPR 7.5 KOHM +-5% 1/10W	
R502	061G0603752	RST CHIPR 7.5 KOHM +-5% 1/10W	
R483	061G0603821	RST CHIPR 820 OHM +-5% 1/10W	
R4E5	061G0603822	RST CHIPR 8.2 KOHM +-5% 1/10W	
R446	061G0603845 0F	RST CHIP 845R 1/10W 1%	
R447	061G0603845 0F	RST CHIP 845R 1/10W 1%	
R487	061G1206000	RST CHIP MAX 0R05 1/4W	
R730	061G1206000	RST CHIP MAX 0R05 1/4W	
R639	061G1206220	RST CHIPR 22 OHM +-5% 1/4W	
R670	061G1206220	RST CHIPR 22 OHM +-5% 1/4W	
R640	061G1206629	RST CHIP 6R2 1/4W 5%	
R644	061G1206629	RST CHIP 6R2 1/4W 5%	
R671	061G1206629	RST CHIP 6R2 1/4W 5%	
R716	061G1206629	RST CHIP 6R2 1/4W 5%	
R672	061G1206629	RST CHIP 6R2 1/4W 5%	
R237	061T0603348 0F	RST CHIPR 348 OHM +-1% 1/10W	
R457	061T0603619 9F	RST CHIPR 61.9 OHM +-1% 1/10W	
R458	061T0603619 9F	RST CHIPR 61.9 OHM +-1% 1/10W	
R453	061T0603910	RST CHIPR 91 OHM +-5% 1/10W	
C732	065G0402102 32	1000PF +-10% 50V X7R	

C715	065G0402102 32	1000PF +-10% 50V X7R	
C4B9	065G0402102 32	1000PF +-10% 50V X7R	
C454	065G0402102 32	1000PF +-10% 50V X7R	
C410	065G0402102 32	1000PF +-10% 50V X7R	
C408	065G0402102 32	1000PF +-10% 50V X7R	
C281	065G0402102 32	1000PF +-10% 50V X7R	
C275	065G0402102 32	1000PF +-10% 50V X7R	
C223	065G0402102 32	1000PF +-10% 50V X7R	
C217	065G0402102 32	1000PF +-10% 50V X7R	
C4D8	065G0402103 22	CHIP 0.01UF 25V X7R	
C4B8	065G0402103 22	CHIP 0.01UF 25V X7R	
C453	065G0402103 22	CHIP 0.01UF 25V X7R	
C411	065G0402103 22	CHIP 0.01UF 25V X7R	
C409	065G0402103 22	CHIP 0.01UF 25V X7R	
C230	065G0402103 22	CHIP 0.01UF 25V X7R	
C209	065G0402103 22	CHIP 0.01UF 25V X7R	
C485	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C484	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C483	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C482	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C481	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C478	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C477	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C476	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C460	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C463	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C464	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C465	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C466	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C467	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C468	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C469	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C470	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C471	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C472	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C473	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C474	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C475	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4A5	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4E6	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4D7	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4D6	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4D5	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4D2	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4A8	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4A6	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C486	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C487	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C488	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C489	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C490	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	

C491	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C492	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4G7	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4A4	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4A3	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4A2	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4A1	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C499	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C498	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C497	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C496	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C495	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C494	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4E7	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4E8	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4F1	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C4G6	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C459	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C204	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C207	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C208	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C211	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C212	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C221	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C222	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C225	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C226	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C234	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C255	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C458	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C456	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C455	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C414	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C406	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C291	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C280	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C279	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C278	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C260	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C256	065G0402104 12	CAP CHIP 0402 0.1UF 16V X7R	
C235	065G0402105 05	MLCC 0402 1μF 6.3V X5R	
C407	065G0402105 05	MLCC 0402 1μF 6.3V X5R	
C413	065G0402105 05	MLCC 0402 1μF 6.3V X5R	
C415	065G0402105 05	MLCC 0402 1μF 6.3V X5R	
C457	065G0402105 05	MLCC 0402 1μF 6.3V X5R	
C4D4	065G0402105 05	MLCC 0402 1μF 6.3V X5R	
C4E3	065G0402105 05	MLCC 0402 1μF 6.3V X5R	
C4E4	065G0402105 05	MLCC 0402 1μF 6.3V X5R	
C4E5	065G0402105 05	MLCC 0402 1μF 6.3V X5R	
C675	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	
C674	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	

C648	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	
C647	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	
C625	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	
C624	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	
C4F6	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	
C4F5	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	
C4C7	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	
C206	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	
C205	065G0603101 31	CER1 0603 NP0 50V 100P PM5 R	
C241	065G0603102 31	CHIP 1000PF 50V NPO	
C244	065G0603102 31	CHIP 1000PF 50V NPO	
C250	065G0603102 31	CHIP 1000PF 50V NPO	
C450	065G0603102 31	CHIP 1000PF 50V NPO	
C668	065G0603102 31	CHIP 1000PF 50V NPO	
C669	065G0603102 31	CHIP 1000PF 50V NPO	
C670	065G0603102 31	CHIP 1000PF 50V NPO	
C671	065G0603102 31	CHIP 1000PF 50V NPO	
C672	065G0603102 31	CHIP 1000PF 50V NPO	
C673	065G0603102 31	CHIP 1000PF 50V NPO	
C692	065G0603102 31	CHIP 1000PF 50V NPO	
C706	065G0603102 31	CHIP 1000PF 50V NPO	
C754	065G0603102 31	CHIP 1000PF 50V NPO	
C757	065G0603102 31	CHIP 1000PF 50V NPO	
C722	065G0603102 31	CHIP 1000PF 50V NPO	
C712	065G0603102 32	1000PF +-10% 50V X7R	
C616	065G0603104 32	CHIP 0.1UF 50V X7R	
C617	065G0603104 32	CHIP 0.1UF 50V X7R	
C626	065G0603104 32	CHIP 0.1UF 50V X7R	
C630	065G0603104 32	CHIP 0.1UF 50V X7R	
C633	065G0603104 32	CHIP 0.1UF 50V X7R	
C636	065G0603104 32	CHIP 0.1UF 50V X7R	
C638	065G0603104 32	CHIP 0.1UF 50V X7R	
C734	065G0603104 32	CHIP 0.1UF 50V X7R	
C735	065G0603104 32	CHIP 0.1UF 50V X7R	
C740	065G0603104 32	CHIP 0.1UF 50V X7R	
C742	065G0603104 32	CHIP 0.1UF 50V X7R	
C609	065G0603104 32	CHIP 0.1UF 50V X7R	
C4B7	065G0603104 32	CHIP 0.1UF 50V X7R	
C4C4	065G0603104 32	CHIP 0.1UF 50V X7R	
C4F2	065G0603104 32	CHIP 0.1UF 50V X7R	
C4F3	065G0603104 32	CHIP 0.1UF 50V X7R	
C4F4	065G0603104 32	CHIP 0.1UF 50V X7R	
C4F9	065G0603104 32	CHIP 0.1UF 50V X7R	
C501	065G0603104 32	CHIP 0.1UF 50V X7R	
C502	065G0603104 32	CHIP 0.1UF 50V X7R	
C505	065G0603104 32	CHIP 0.1UF 50V X7R	
C507	065G0603104 32	CHIP 0.1UF 50V X7R	
C601	065G0603104 32	CHIP 0.1UF 50V X7R	
C604	065G0603104 32	CHIP 0.1UF 50V X7R	
C746	065G0603104 32	CHIP 0.1UF 50V X7R	
C705	065G0603104 32	CHIP 0.1UF 50V X7R	

C711	065G0603104 32	CHIP 0.1UF 50V X7R	
C714	065G0603104 32	CHIP 0.1UF 50V X7R	
C717	065G0603104 32	CHIP 0.1UF 50V X7R	
C720	065G0603104 32	CHIP 0.1UF 50V X7R	
C721	065G0603104 32	CHIP 0.1UF 50V X7R	
C730	065G0603104 32	CHIP 0.1UF 50V X7R	
C731	065G0603104 32	CHIP 0.1UF 50V X7R	
C642	065G0603104 32	CHIP 0.1UF 50V X7R	
C643	065G0603104 32	CHIP 0.1UF 50V X7R	
C651	065G0603104 32	CHIP 0.1UF 50V X7R	
C652	065G0603104 32	CHIP 0.1UF 50V X7R	
C691	065G0603104 32	CHIP 0.1UF 50V X7R	
C753	065G0603104 32	CHIP 0.1UF 50V X7R	
C756	065G0603104 32	CHIP 0.1UF 50V X7R	
C401	065G0603104 32	CHIP 0.1UF 50V X7R	
C761	065G0603104 32	CHIP 0.1UF 50V X7R	
C762	065G0603104 32	CHIP 0.1UF 50V X7R	
C664	065G0603104 32	CHIP 0.1UF 50V X7R	
C662	065G0603104 32	CHIP 0.1UF 50V X7R	
C658	065G0603104 32	CHIP 0.1UF 50V X7R	
C655	065G0603104 32	CHIP 0.1UF 50V X7R	
C653	065G0603104 32	CHIP 0.1UF 50V X7R	
C666	065G0603104 32	CHIP 0.1UF 50V X7R	
C667	065G0603104 32	CHIP 0.1UF 50V X7R	
C240	065G0603104 32	CHIP 0.1UF 50V X7R	
C243	065G0603104 32	CHIP 0.1UF 50V X7R	
C249	065G0603104 32	CHIP 0.1UF 50V X7R	
C289	065G0603104 32	CHIP 0.1UF 50V X7R	
C403	065G0603104 32	CHIP 0.1UF 50V X7R	
C426	065G0603104 32	CHIP 0.1UF 50V X7R	
C427	065G0603104 32	CHIP 0.1UF 50V X7R	
C428	065G0603104 32	CHIP 0.1UF 50V X7R	
C429	065G0603104 32	CHIP 0.1UF 50V X7R	
C431	065G0603104 32	CHIP 0.1UF 50V X7R	
C4B6	065G0603104 32	CHIP 0.1UF 50V X7R	
C4B5	065G0603104 32	CHIP 0.1UF 50V X7R	
C4B4	065G0603104 32	CHIP 0.1UF 50V X7R	
C4B3	065G0603104 32	CHIP 0.1UF 50V X7R	
C4B2	065G0603104 32	CHIP 0.1UF 50V X7R	
C4B1	065G0603104 32	CHIP 0.1UF 50V X7R	
C4A9	065G0603104 32	CHIP 0.1UF 50V X7R	
C461	065G0603104 32	CHIP 0.1UF 50V X7R	
C449	065G0603104 32	CHIP 0.1UF 50V X7R	
C432	065G0603104 32	CHIP 0.1UF 50V X7R	
C635	065G0603105 12	CHIP 1UF 16VX7R 0603	
C632	065G0603105 12	CHIP 1UF 16VX7R 0603	
C751	065G0603105 17	1UF 16V Y5V	
C749	065G0603105 17	1UF 16V Y5V	
C736	065G0603105 17	1UF 16V Y5V	
C725	065G0603105 17	1UF 16V Y5V	
C724	065G0603105 17	1UF 16V Y5V	

C702	065G0603105 17	1UF 16V Y5V	
C701	065G0603105 17	1UF 16V Y5V	
C4F8	065G0603105 17	1UF 16V Y5V	
C4D3	065G0603105 17	1UF 16V Y5V	
C425	065G0603105 17	1UF 16V Y5V	
C430	065G0603105 17	1UF 16V Y5V	
C4C2	065G0603150 31	CHIP 15PF 50V NPO	
C247	065G0603152 32	1500PF +-10% 50V X7R 06	
C4C1	065G0603180 31	CAP CC 18PF 50V J NPO 0603	
C4G1	065G0603220 31	CER1 0603 NP0 50V 22P PM	
C693	065G0603220 31	CER1 0603 NP0 50V 22P PM	
C4H2	065G0603220 31	CER1 0603 NP0 50V 22P PM	
C4H1	065G0603220 31	CER1 0603 NP0 50V 22P PM	
C4G3	065G0603220 31	CER1 0603 NP0 50V 22P PM	
C694	065G0603220 31	CER1 0603 NP0 50V 22P PM	
C606	065G0603221 32	CHIP 220PF 50V X7R	
C607	065G0603221 32	CHIP 220PF 50V X7R	
C612	065G0603221 32	CHIP 220PF 50V X7R	
C613	065G0603221 32	CHIP 220PF 50V X7R	
C622	065G0603221 32	CHIP 220PF 50V X7R	
C623	065G0603221 32	CHIP 220PF 50V X7R	
C285	065G0603224 32	CHIP 0.22UF 50V X7R	
C402	065G0603224 32	CHIP 0.22UF 50V X7R	
C739	065G0603224 32	CHIP 0.22UF 50V X7R	
C747	065G0603224 32	CHIP 0.22UF 50V X7R	
C748	065G0603224 32	CHIP 0.22UF 50V X7R	
C4F7	065G0603225 A5	CHIP 2.2uF 10V X5R	
C404	065G0603330 31 GP	33PF+-5% 50V NPO	
C405	065G0603330 31 GP	33PF+-5% 50V NPO	
C644	065G0603331 32	CHIP 330PF 50V X7R	
C660	065G0603331 32	CHIP 330PF 50V X7R	
C417	065G0603392 32	CHIP 3900PF 50V X7R	
C416	065G0603393 32	CHIP 0.039UF 50V X7R	
C649	065G0603472 32 GP	CHIP 4700PF 50V NPO	
C421	065G0603474 12	MLCC 0603 0.47UF K 16V X7R	
C462	065G0603474 27	CHIP 0.47UF 25V Y5V	
C246	065G0603561 31	CAP:CER 560PF 5%50V SMT 0603	
C220	065G0603820 31	0603 82PF +-5%, 50V NPO	
C4C8	065G1206106 15	CHIP 10UF 16V X5R	
C4A7	065G120610612K 3	CHIP 10uF 16V X7R 10%	
C493	065G120610612K 3	CHIP 10uF 16V X7R 10%	
C480	065G120610612K 3	CHIP 10uF 16V X7R 10%	
C479	065G120610612K 3	CHIP 10uF 16V X7R 10%	
C424	065G120610612K 3	CHIP 10uF 16V X7R 10%	
C210	065G1206475 22	4.7U/25V X7R	
C231	065G1206475 22	4.7U/25V X7R	

C418	065G1206475 22	4.7U/25V X7R	
C420	065G1206475 22	4.7U/25V X7R	
C628	065G1206475 22	4.7U/25V X7R	
C629	065G1206475 22	4.7U/25V X7R	
C631	065G1206475 22	4.7U/25V X7R	
C233	065T0402105 02	MLCC 0402 1UF K 6.3V X7R	
C272	065T0402224 A7	CAP 0402 0.22UF Z 10V	
C273	065T0402224 A7	CAP 0402 0.22UF Z 10V	
C274	065T0402224 A7	CAP 0402 0.22UF Z 10V	
C650	065T0603681 21	CHIP 680PF 25V NPO	
C760	065T1206226 A5	CHIP 22UF 10V X5R	
C759	065T1206226 A5	CHIP 22UF 10V X5R	
C758	065T1206226 A5	CHIP 22UF 10V X5R	
C726	065T1206226 A5	CHIP 22UF 10V X5R	
C4G9	065T1206226 A5	CHIP 22UF 10V X5R	
C4G5	065T1206226 A5	CHIP 22UF 10V X5R	
C419	065T1206226 A5	CHIP 22UF 10V X5R	
FB601	071G 56G301 EA	BEAD 300 欧	
FB602	071G 56G301 EA	BEAD 300 欧	
FB604	071G 56G301 EA	BEAD 300 欧	
FB605	071G 56G301 EA	BEAD 300 欧	
FB420	071G 59B121	TB160808B	
FB417	071G 59B121	TB160808B	
FB416	071G 59B121	TB160808B	
FB415	071G 59B121	TB160808B	
FB414	071G 59B121	TB160808B	
FB412	071G 59B121	TB160808B	
FB411	071G 59B121	TB160808B	
FB410	071G 59B121	TB160808B	
FB408	071G 59B121	TB160808B	
FB405	071G 59B121	TB160808B	
FB404	071G 59B121	TB160808B	
FB402	071G 59B121	TB160808B	
FB220	071G 59B121	TB160808B	
FB219	071G 59B121	TB160808B	
FB217	071G 59B121	TB160808B	
FB216	071G 59B121	TB160808B	
FB207	071G 59B121	TB160808B	
FB203	071G 59B601 EA	CHIP BEAD 600 OHM	
FB206	071G 59B601 EA	CHIP BEAD 600 OHM	
FB209	071G 59B601 EA	CHIP BEAD 600 OHM	
FB210	071G 59B601 EA	CHIP BEAD 600 OHM	
FB212	071G 59B601 EA	CHIP BEAD 600 OHM	
FB607	071G 59B601 EA	CHIP BEAD 600 OHM	
FB608	071G 59B601 EA	CHIP BEAD 600 OHM	
FB413	071G 59C121 B	FCM1608C-121T03 SMD	
FB213	071G 59K300 B	CHIP BEAD FCB1608KF-300T07 bullwill	
FB214	071G 59K300 B	CHIP BEAD FCB1608KF-300T07 bullwill	
FB215	071G 59K300 B	CHIP BEAD FCB1608KF-300T07 bullwill	
FB221	071G 59K300 B	CHIP BEAD FCB1608KF-300T07 bullwill	
FB222	071G 59K300 B	CHIP BEAD FCB1608KF-300T07 bullwill	

FB223	071G 59K300 B	CHIP BEAD FCB1608KF-300T07 bullwill	
FB224	071G 59K300 B	CHIP BEAD FCB1608KF-300T07 bullwill	
FB225	071G 59K300 B	CHIP BEAD FCB1608KF-300T07 bullwill	
FB226	071G 59K300 B	CHIP BEAD FCB1608KF-300T07 bullwill	
FB403	071T 59B121 J	CHIP BEAD 121 OHM	
FB401	071T 59B121 J	CHIP BEAD 121 OHM	
FB702	071T3216330 6Y	CHIP BEAD 1206 33ohm 6A	
FB705	071T3216330 6Y	CHIP BEAD 1206 33ohm 6A	
FB704	071T3216330 6Y	CHIP BEAD 1206 33ohm 6A	
FB703	071T3216330 6Y	CHIP BEAD 1206 33ohm 6A	
FB701	071T3216330 6Y	CHIP BEAD 1206 33ohm 6A	
FB603	071T3216330 6Y	CHIP BEAD 1206 33ohm 6A	
L203	073G 8515810K	CHIP INDUCTOR 0.15uH 10% 0805	
L702	073G253S 46 B	SMD CHOKE TP0504-4R7M 4.7uH	
L701	073G253S 46 B	SMD CHOKE TP0504-4R7M 4.7uH	
L204	073T 57228	chip inductor 0805 0.22uH+-10% JKMT	
L202	073T 57228	chip inductor 0805 0.22uH+-10% JKMT	
CN501	088T 340 21 VA	HDMI HEADER 21P V/T	
ZD212	093G 60505	DIO SIG SM BAT54C(PHSE)R	
ZD403	093G 64 37 N	VPOR0603100KV05	
ZD404	093G 64 37 N	VPOR0603100KV05	
ZD603	093G 64 37 N	VPOR0603100KV05	
ZD604	093G 64 37 N	VPOR0603100KV05	
ZD605	093G 64 37 N	VPOR0603100KV05	
ZD221	093G 64 37 N	VPOR0603100KV05	
ZD214	093G 64 37 N	VPOR0603100KV05	
ZD211	093G 64 37 N	VPOR0603100KV05	
ZD209	093G 64 37 N	VPOR0603100KV05	
ZD202	093G 64 37 N	VPOR0603100KV05	
ZD201	093G 64 37 N	VPOR0603100KV05	
ZD203	093G 64 37 N	VPOR0603100KV05	
ZD210	093G 64 37 N	VPOR0603100KV05	
ZD213	093G 64 37 N	VPOR0603100KV05	
ZD215	093G 64 37 N	VPOR0603100KV05	
ZD216	093G 64 37 N	VPOR0603100KV05	
ZD217	093G 64 37 N	VPOR0603100KV05	
ZD218	093G 64 37 N	VPOR0603100KV05	
ZD219	093G 64 37 N	VPOR0603100KV05	
ZD220	093G 64 37 N	VPOR0603100KV05	
D401	093G 6432P	LL4148	
D404	093G 6432P	LL4148	
	715T2763 1 2	Main PCB	
	Q85T0090101 S	BBY TOP SHIELD	
	Q85T0091101 S	BBY BTM SHIELD	
	IRPF8QB3	IR BOARD	
CN01	033G3802 5B YH	CONNECTOR 5PIN 2.0PITCH	
U01	056T 627 33 1	IR 37.9KHZ KSM-603TM2E	
R01	061G0603153	RST CHIPR 15KOHM +-5% 1/10W	
C01	065G0603104 32	CHIP 0.1UF 50V X7R	
LED01	081G 14 24 EL	CHIP LED BLUE/DARK RED	
	715T3107 1	IR PCB	

	Q11T5005 1 GP	WIRE SADDLE	
	Q12T6101 1	FOOT PAD	
	Q15T0258101	26bkt-vesa	
	Q15T0259201	BKT-CMO-PANEL-SUPPORT	
	Q15T0260101	26bkt-base-support	
	Q15T0261102	26bkt-pcb-holder-btm	
	Q15T0262101	26bkt-pcb-holder-top_us	
	Q35T0033 1A1P0200	DECO_BEZEL	
	Q36T 600 18134	NONWOVEN FABRIC	
	Q36T 600 28 3 GP	NONWOVEN FABRIC	
	Q40T000297615A	BLACK LABEL	
	Q44TE021101	EPS CUSHION	
	Q44TE021201	EPS CUSHION	
	Q44TE021301	EPS CUSHION	
	Q45G 99609 78	EPE BAG FOR MONITOR	
	Q45T 99609 79	EPE COVER FOR BASE	
	Q50T 500523	CABLE TIE	
	Q07G 8 1 11	COMPOUND PALLET	
	Q40G000162410A	S/N LABEL	
	Q40G582C786 1A	Carton label	
	Q40T0001008 1A	CARTON LABEL	
	Q40T0002008 5A	POP LABEL	
	Q40T0002008 6A	POP LABEL	
	Q44G600027V 9A	Carton	
	Q44TE014BLO001	paper sheet	
	Q45G 77 5	PE PACKING	