



ALPHANUMERIC INDEX — CROSS-REFERENCE

The following table represents an index and cross-reference guide for all low-frequency power transistors which are either manufactured directly by Motorola or for which Motorola manufactures a suitable equivalent. Where the Motorola part num-

ber differs from the industry part number, the Motorola device is a "form, fit and function" replacement for the industry type number — however, subtle differences in characteristics and/or specifications may exist.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number	Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
1S110A-100		MJ16018	3-782	2N3441	2N3441		3-13
2N1487		2N5877	3-120	2N3442	2N3442		3-15
2N1488		2N5878	3-120	2N3445	2N3447		3-18
2N1489		2N5877	3-120	2N3446	2N3448		3-18
2N1490		2N5878	3-120	2N3447	2N3447		3-18
2N1702		2N5877	3-120	2N3448	2N3448		3-18
2N3016		2N5337	3-97	2N3583	2N3583		3-20
2N3021		2N3789	3-56	2N3584	2N3584		3-20
2N3022		2N3789	3-56	2N3585	2N3585		3-20
2N3023		2N3789	3-56	2N3667		2N5881	3-123
2N3024		2N3791	3-56	2N3713		2N5881	3-123
2N3025		2N3791	3-56	2N3714	2N3714		3-26
2N3026		2N3791	3-56	2N3715	2N3715		3-26
2N3054	2N3054		3-2	2N3715JAN	2N3715JAN		3-26
2N3054A	2N3054A		3-2	2N3715JTX	2N3715JTX		3-26
2N3055	2N3055		3-6	2N3715JTXV	2N3715JTXV		3-26
2N3055A	2N3055A		3-9	2N3716	2N3716		3-26
2N3055H		2N3055A	3-9	2N3716JAN	2N3716JAN		3-26
2N3055H		2N5302JAN	3-93	2N3716JTX	2N3716JTX		3-26
2N3055JAN		2N3055A	3-9	2N3716JTXV	2N3716JTXV		3-26
2N3055SD							
2N3055SUB		2N3055A	3-9	2N3719	2N3719		3-32
2N3076		2N6249	3-164	2N3720	2N3720		3-32
2N3079		2N6308	3-181	2N3738	2N3738		3-37
2N3080		2N6543	3-215	2N3739	2N3739		3-37
2N3171		2N3789	3-56	2N3739JAN	2N3739JAN		3-37
2N3172		2N3789	3-56	2N3739JTX	2N3739JTX		3-37
2N3173		2N3790	3-56	2N3739JTXV	2N3739JTXV		3-37
2N3174		MJ15016	3-9	2N3740	2N3740		3-41
2N3183		2N3789	3-56	2N3740A		2N3740	3-41
2N3184		2N3789	3-56	2N3740JAN	2N3740JAN		3-41
2N3185		2N3790	3-56	2N3740JTX	2N3740JTX		3-41
2N3186		MJ15016	3-9	2N3740JTXV	2N3740JTXV		3-41
2N3195		2N3789	3-56	2N3741	2N3741		3-41
2N3196		2N3790	3-56	2N3741A	2N3741A		3-41
2N3198		MJ15016	3-9	2N3741JAN	2N3741JAN		3-41
2N3202		2N3719	3-32	2N3741JTX	2N3741JTX		3-41
2N3203		2N3720	3-32	2N3741JTXV	2N3741JTXV		3-41
2N3204		2N6303	3-32	2N3766	2N3766		3-44
2N3232		2N5877	3-120	2N3766JAN	2N3766JAN		3-44
2N3233		2N5882	3-123	2N3766JTX	2N3766JTX		3-44
2N3234		2N5760	3-116	2N3766JTXV	2N3766JTXV		3-44
2N3235		2N3055	3-6	2N3767	2N3767		3-44
2N3236		2N5882	3-123	2N3767JAN	2N3767JAN		3-44
2N3237		2N5302	3-93	2N3767JTX	2N3767JTX		3-44
2N3238		2N5882	3-123	2N3767JTXV	2N3767JTXV		3-44
2N3239		2N5882	3-123	2N3771	2N3771		3-48
2N3240		2N5882	3-123	2N3772	2N3772		3-48
2N3419		2N5336	3-97	2N3773	2N3773		3-52
2N3420		2N5336	3-97	2N3788		2N6543	3-215
2N3421		2N5336	3-97	2N3789	2N3789		3-56

TABLE 3 — METAL TO-213 (Formerly TO-66)



STYLE 1:
 PIN 1. BASE
 2. EMITTER
 CASE. COLLECTOR

CASE 80-02 (TO-213AA)

I _C Cont Amps Max	V _{CE0} (sus) Volts Min	Device Type		hFE Min/Max	@ I _C Amp	Resistive Switching			f _T MHz Min	P _D (Case) Watts @ 25°C	
		NPN	PNP			t _s μs Max	t _f μs Max	@ I _C Amp			
1	80	2N4912		20/100	0.5	0.6 typ	0.3 typ	0.5	3	25	
	175	2N3583	2N6420	40/200	0.5	2 typ	0.23 typ	0.5	10	35	
	225	2N3738		40/200	0.1	3 typ	0.3 typ	0.1	10	20	
	300	2N3739		40/200	0.1	3 typ	0.3 typ	0.1	10	20	
2	225		2N6211	10/100	1	2.5	0.6	1	20	35	
	250	2N3584	2N6421	25/100	1	4	3	1	10	35	
	300		2N6212	2N6422	10/100	1	2.5	0.6	1	20	35
			2N3585		25/100	1	4	3	1	10	35
			2N4240		30/150	0.75	6	3	0.75	15	35
350		2N6213	10/100	1	2.5	0.6	1	20	35		
3	140	2N3441		25/100	0.5				0.2	25	
4	60	2N3054.A 2N3766 2N6294##	2N3740	30/100	0.25	1.3 typ	0.27 typ	0.25	4	25	
				25/100	0.5	1 typ	0.3 typ	0.5	3	75	
				40/160	0.5	0.9 typ	0.09 typ	0.5	10	20	
				750/18k	2	0.9 typ	0.7 typ	2	4#	50	
	80	2N3767 2N6295##	2N3741	30/100	0.25	1.3 typ	0.27 typ	0.25	4	25	
				40/160	0.5	0.9 typ	0.09 typ	0.5	10	20	
			750/18k	2	0.9 typ	0.7 typ	2	4	50		
5	80	2N4233A		25/100	1.5	0.5 typ	0.2 typ	1.5	4	75	
7	60		2N6317	20/100	2.5	1	0.8	2.5	4	90	
	80	2N5428		60/240	2	2	0.2	2	30	40	
			2N6318	20/100	2.5	1	0.8	2.5	4	90	
	100	2N5429 2N5430		30/120 60/240	2 2	2 2	0.2 0.2	2 2	30 30	40 40	
8	60	2N6300##	2N6298##	750/18k	4	1.5 typ	1.5 typ	4	4#	75	
	80	2N6301##	2N6299##	750/18k	4	1.5 typ	1.5 typ	4	4#	75	

|h_{FE}| @ 1 MHz, ## Darlington

JAN, JTX, JTXV Available

2

2N3740
2N3741,A

MEDIUM-POWER PNP TRANSISTORS


... ideal for use as drivers, switches and medium-power amplifier applications. These devices feature:

- Low Saturation Voltage – $0.6 V_{CE(sat)}$ @ $I_C = 1.0$ Amp
- High Gain Characteristics – h_{FE} @ $I_C = 250$ mA: 30–100
- Excellent Safe Area Limits (See Figure 2)
- Low Collector Cutoff Current – 100 nA (Max) 2N3740, 2N3741A
- Complementary to NPN 2N3766 (2N3740) and 2N3767 (2N3741)

POWER TRANSISTORS

PNP SILICON


60–80 VOLTS
25 WATTS



***MAXIMUM RATINGS**


Rating	Symbol	2N3740	2N3741 2N3741A	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	7.0	7.0	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Collector Current – Continuous – Peak (Note 1)	I_C	4.0 10		Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	25 0.143		Watts W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		$^\circ\text{C}$

Note 1: See Figure 2

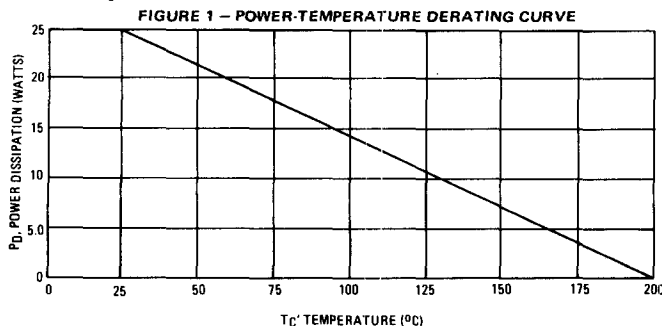

Safe Area Curves are indicated by Figure 2.
 Both limits are applicable and must be observed.

*Indicates JEDEC Registered Data.

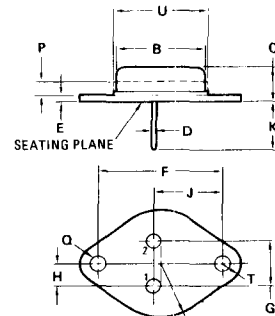

STYLE 1:
 PIN 1: BASE
 2: EMITTER
 CASE: COLLECTOR

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and Notes Apply.

CASE 80-02
TO-213AA
(TO-66)

2N3740, 2N3741,A

*ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage ^① ($I_C = 100 \text{ mAdc}$, $I_B = 0$)	$V_{CE0(sus)}$ ^①	60 80	—	Vdc
Emitter Base Cutoff Current ($V_{EB} = 7.0 \text{ Vdc}$)	I_{EBO}	—	0.5 100	mAdc nAdc
Collector Cutoff Current ($V_{CE} = 60 \text{ Vdc}$, $V_{BE(off)} = 1.5 \text{ Vdc}$)	I_{CEX}	—	100	μAdc
($V_{CE} = 80 \text{ Vdc}$, $V_{BE(off)} = 1.5 \text{ Vdc}$)		—	100	nAdc
($V_{CE} = 40 \text{ Vdc}$, $V_{BE(off)} = 1.5 \text{ Vdc}$, $T_C = 150^\circ\text{C}$)		—	100	μAdc
($V_{CE} = 60 \text{ Vdc}$, $V_{BE(off)} = 1.5 \text{ Vdc}$, $T_C = 150^\circ\text{C}$)		—	1.0 0.5	mAdc
Collector-Emitter Cutoff Current ($V_{CE} = 40 \text{ Vdc}$, $I_B = 0$)	I_{CEO}	—	1.0	mAdc
($V_{CE} = 60 \text{ Vdc}$, $I_B = 0$)		—	1.0 1.0	μAdc mAdc
Collector Base Cutoff Current ($V_{CB} = 60 \text{ Vdc}$, $I_E = 0$)	I_{CBO}	—	100	μAdc
($V_{CB} = 80 \text{ Vdc}$, $I_E = 0$)		—	100 100	nAdc μAdc

ON CHARACTERISTICS

DC Current Gain ($I_C = 100 \text{ mAdc}$, $V_{CE} = 1.0 \text{ Vdc}$) ($I_C = 250 \text{ mAdc}$, $V_{CE} = 1.0 \text{ Vdc}$) ($I_C = 500 \text{ mAdc}$, $V_{CE} = 1.0 \text{ Vdc}$) ($I_C = 1.0 \text{ Adc}$, $V_{CE} = 1.0 \text{ Vdc}$)	h_{FE} ^①	40 30 20 10	— 100 — —	—
Collector-Emitter Saturation Voltage ($I_C = 1.0 \text{ Adc}$, $I_B = 125 \text{ mAdc}$)	$V_{CE(sat)}$ ^①	—	0.6	Vdc
Base-Emitter Voltage ($I_C = 250 \text{ mAdc}$, $V_{CE} = 1.0 \text{ Vdc}$)	V_{BE} ^①	—	1.0	Vdc

TRANSIENT CHARACTERISTICS


Current-Gain-Bandwidth Product ($I_C = 100 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$, $f = 1.0 \text{ MHz}$)	f_T	3.0 4.0 [†]	—	MHz
Common Base Output Capacitance ($V_{CB} = 10 \text{ Vdc}$, $I_C = 0$, $f = 100 \text{ kHz}$)	C_{ob}	—	100	pF
Small-Signal Current Gain ($I_C = 50 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$, $f = 1.0 \text{ kHz}$)	h_{fe}	25	—	—

*Indicates JEDEC Registered Data.

†Motorola guarantees this value in addition to the JEDEC registered data shown.

① Pulse Test: Pulse Width $\leq 300 \mu\text{s}$, Duty Cycle $\leq 2.0\%$.


FIGURE 2 — ACTIVE REGION SAFE OPERATING AREA

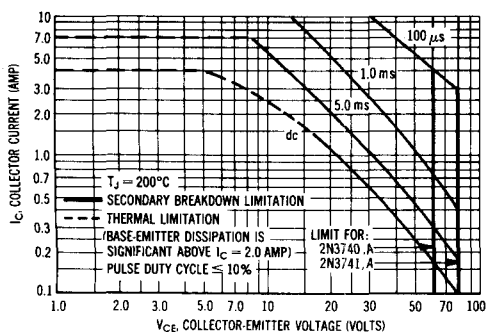


The Safe Operating Area Curves indicate $I_C - V_{CE}$ limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J , power-temperature derating must be observed for both steady state and pulse power conditions.

2N3740, 2N3741,A

FIGURE 3 – CURRENT GAIN

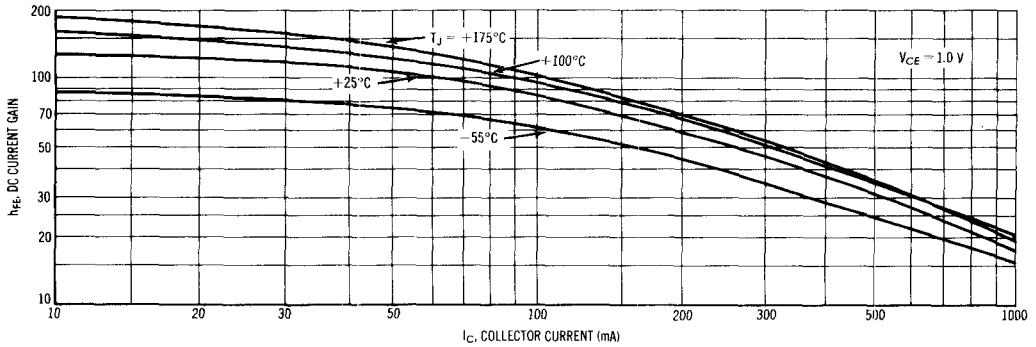

SATURATION REGION CHARACTERISTICS
FIGURE 4 – COLLECTOR SATURATION REGION

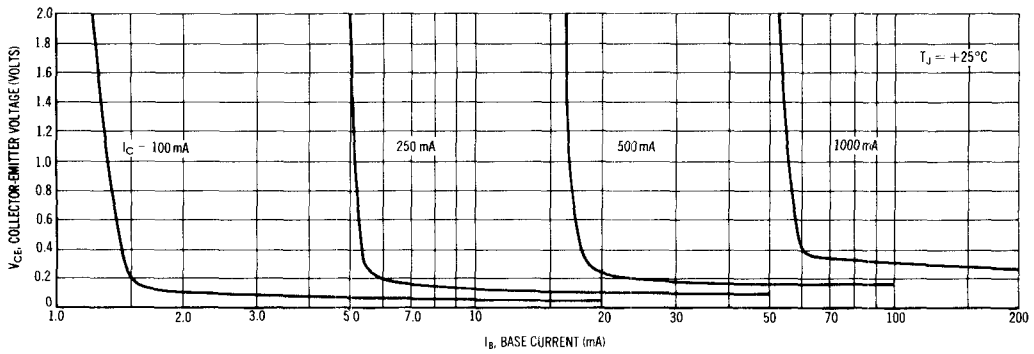

3

FIGURE 5 – "ON" VOLTAGES

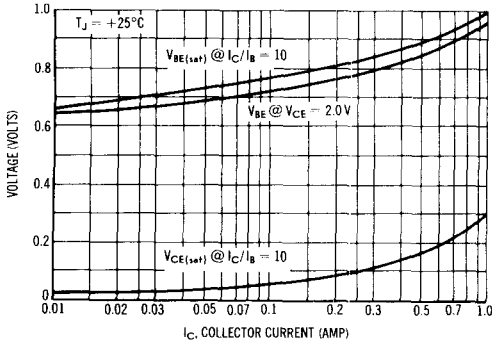


FIGURE 6 – TEMPERATURE COEFFICIENTS

