



ALPHANUMERIC INDEX — CROSS-REFERENCE

The following table represents an index and cross-reference guide for all low-frequency power transistors which are either manufactured directly by Motorola or for which Motorola manufactures a suitable equivalent. Where the Motorola part num-

ber differs from the industry part number, the Motorola device is a "form, fit and function" replacement for the industry type number — however, subtle differences in characteristics and/or specifications may exist.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number	Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
1S110A-100		MJ16018	3-782	2N3441	2N3441		3-13
2N1487		2N5877	3-120	2N3442	2N3442		3-15
2N1488		2N5878	3-120	2N3445	2N3447		3-18
2N1489		2N5877	3-120	2N3446	2N3448		3-18
2N1490		2N5878	3-120	2N3447	2N3447		3-18
2N1702		2N5877	3-120	2N3448	2N3448		3-18
2N3016		2N5337	3-97	2N3583	2N3583		3-20
2N3021		2N3789	3-56	2N3584	2N3584		3-20
2N3022		2N3789	3-56	2N3585	2N3585		3-20
2N3023		2N3789	3-56	2N3667		2N5881	3-123
2N3024		2N3791	3-56	2N3713		2N5881	3-123
2N3025		2N3791	3-56	2N3714	2N3714		3-26
2N3026		2N3791	3-56	2N3715	2N3715		3-26
2N3054	2N3054		3-2	2N3715JAN	2N3715JAN		3-26
2N3054A	2N3054A		3-2	2N3715JTX	2N3715JTX		3-26
2N3055	2N3055		3-6	2N3715JTXV	2N3715JTXV		3-26
2N3055A	2N3055A		3-9	2N3716	2N3716		3-26
2N3055H		2N3055A	3-9	2N3716JAN	2N3716JAN		3-26
2N3055H		2N3055A	3-9	2N3716JTX	2N3716JTX		3-26
2N3055JAN		2N5302JAN	3-93	2N3716JTXV	2N3716JTXV		3-26
2N3055SD		2N3055A	3-9				
2N3055SUB		2N3055A	3-9	2N3719	2N3719		3-32
2N3076		2N6249	3-164	2N3720	2N3720		3-32
2N3079		2N6308	3-181	2N3738	2N3738		3-37
2N3080		2N6543	3-215	2N3739	2N3739		3-37
2N3171		2N3789	3-56	2N3739JAN	2N3739JAN		3-37
2N3172		2N3789	3-56	2N3739JTX	2N3739JTX		3-37
2N3173		2N3790	3-56	2N3739JTXV	2N3739JTXV		3-37
2N3174		MJ15016	3-9	2N3740	2N3740		3-41
2N3183		2N3789	3-56	2N3740A		2N3740	3-41
2N3184		2N3789	3-56	2N3740JAN	2N3740JAN		3-41
2N3185		2N3790	3-56	2N3740JTX	2N3740JTX		3-41
2N3186		MJ15016	3-9	2N3740JTXV	2N3740JTXV		3-41
2N3195		2N3789	3-56	2N3741	2N3741		3-41
2N3196		2N3790	3-56	2N3741A	2N3741A		3-41
2N3198		MJ15016	3-9	2N3741JAN	2N3741JAN		3-41
2N3202		2N3719	3-32	2N3741JTX	2N3741JTX		3-41
2N3203		2N3720	3-32	2N3741JTXV	2N3741JTXV		3-41
2N3204		2N6303	3-32	2N3766	2N3766		3-44
2N3232		2N5877	3-120	2N3766JAN	2N3766JAN		3-44
2N3233		2N5882	3-123	2N3766JTX	2N3766JTX		3-44
2N3234		2N5760	3-116	2N3766JTXV	2N3766JTXV		3-44
2N3235		2N3055	3-6	2N3767	2N3767		3-44
2N3236		2N5882	3-123	2N3767JAN	2N3767JAN		3-44
2N3237		2N5302	3-93	2N3767JTX	2N3767JTX		3-44
2N3238		2N5882	3-123	2N3767JTXV	2N3767JTXV		3-44
2N3239		2N5882	3-123	2N3771	2N3771		3-48
2N3240		2N5882	3-123	2N3772	2N3772		3-48
2N3419		2N5336	3-97	2N3773	2N3773		3-52
2N3420		2N5336	3-97	2N3788		2N6543	3-215
2N3421		2N5336	3-97	2N3789	2N3789		3-56

TABLE 3 — METAL TO-213 (Formerly TO-66)



STYLE 1:
 PIN 1. BASE
 2. EMITTER
 CASE. COLLECTOR

CASE 80-02 (TO-213AA)

I _C Cont Amps Max	V _{CE0} (sus) Volts Min	Device Type		hFE Min/Max	@ I _C Amp	Resistive Switching			f _T MHz Min	P _D (Case) Watts @ 25°C
		NPN	PNP			t _s μs Max	t _f μs Max	@ I _C Amp		
1	80	2N4912		20/100	0.5	0.6 typ	0.3 typ	0.5	3	25
	175	2N3583	2N6420	40/200	0.5	2 typ	0.23 typ	0.5	10	35
	225	2N3738		40/200	0.1	3 typ	0.3 typ	0.1	10	20
	300	2N3739		40/200	0.1	3 typ	0.3 typ	0.1	10	20
2	225		2N6211	10/100	1	2.5	0.6	1	20	35
	250	2N3584	2N6421	25/100	1	4	3	1	10	35
	300		2N6212	10/100	1	2.5	0.6	1	20	35
			2N3585 2N4240	2N6422	25/100 30/150	1 0.75	4 6	3 3	1 0.75	10 15
350		2N6213	10/100	1	2.5	0.6	1	20	35	
3	140	2N3441		25/100	0.5				0.2	25
4	60		2N3740	30/100	0.25	1.3 typ	0.27 typ	0.25	4	25
			2N3054.A	25/100	0.5	1 typ	0.3 typ	0.5	3	75
			2N3766	40/160	0.5	0.9 typ	0.09 typ	0.5	10	20
			2N6294##	2N6296##	750/18k	2	0.9 typ	0.7 typ	2	4#
	80		2N3741	30/100	0.25	1.3 typ	0.27 typ	0.25	4	25
			2N3767 2N6295##	2N6297##	40/160 750/18k	0.5 2	0.9 typ 0.9 typ	0.09 typ 0.7 typ	0.5 2	10 4
5	80	2N4233A		25/100	1.5	0.5 typ	0.2 typ	1.5	4	75
7	60		2N6317	20/100	2.5	1	0.8	2.5	4	90
	80	2N5428		60/240	2	2	0.2	2	30	40
			2N6318		20/100	2.5	1	0.8	2.5	4
	100	2N5429 2N5430		30/120 60/240	2 2	2 2	0.2 0.2	2 2	30 30	40 40
8	60	2N6300##	2N6298##	750/18k	4	1.5 typ	1.5 typ	4	4#	75
	80	2N6301##	2N6299##	750/18k	4	1.5 typ	1.5 typ	4	4#	75

|h_{FE}| @ 1 MHz, ## Darlington

JAN, JTX, JTXV Available

2

2N3740
2N3741,A

MEDIUM-POWER PNP TRANSISTORS


... ideal for use as drivers, switches and medium-power amplifier applications. These devices feature:

- Low Saturation Voltage – $0.6 V_{CE(sat)}$ @ $I_C = 1.0$ Amp
- High Gain Characteristics – h_{FE} @ $I_C = 250$ mA: 30–100
- Excellent Safe Area Limits (See Figure 2)
- Low Collector Cutoff Current – 100 nA (Max) 2N3740, 2N3741A
- Complementary to NPN 2N3766 (2N3740) and 2N3767 (2N3741)

POWER TRANSISTORS

PNP SILICON


60–80 VOLTS
25 WATTS



***MAXIMUM RATINGS**


Rating	Symbol	2N3740	2N3741 2N3741A	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	7.0	7.0	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Collector Current – Continuous – Peak (Note 1)	I_C	4.0 10		Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	25 0.143		Watts W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		$^\circ\text{C}$

Note 1: See Figure 2

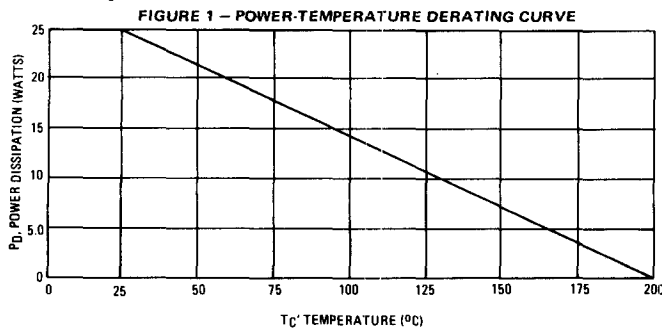

Safe Area Curves are indicated by Figure 2.
 Both limits are applicable and must be observed.

*Indicates JEDEC Registered Data.

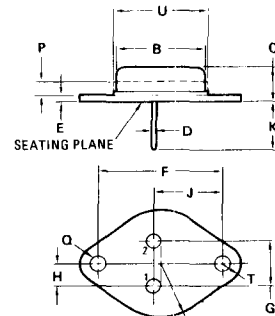

STYLE 1:
 PIN 1. BASE
 2. EMITTER
 CASE: COLLECTOR


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and Notes Apply.

CASE 80-02
TO-213AA
(TO-66)


2N3740, 2N3741,A

FIGURE 3 – CURRENT GAIN

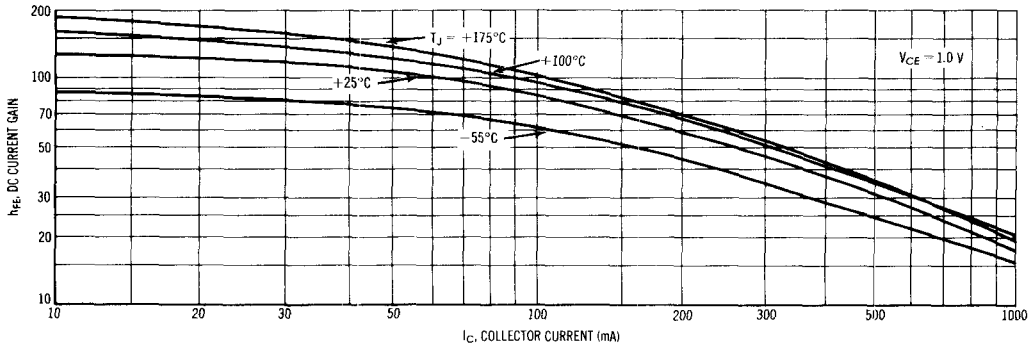

SATURATION REGION CHARACTERISTICS

FIGURE 4 – COLLECTOR SATURATION REGION

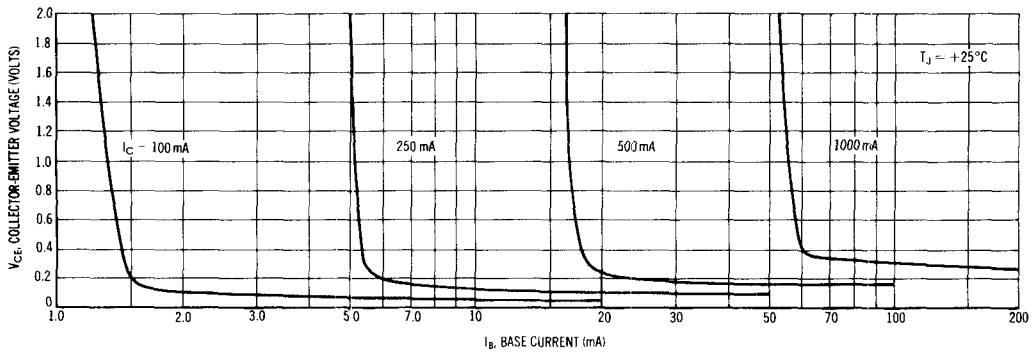

3

FIGURE 5 – "ON" VOLTAGES

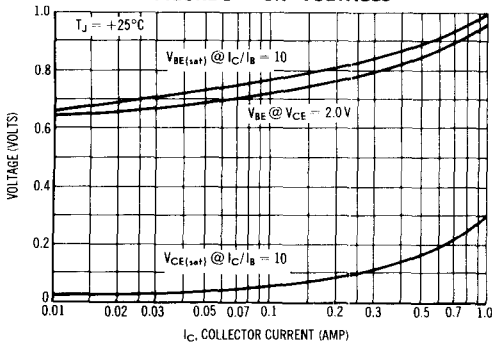


FIGURE 6 – TEMPERATURE COEFFICIENTS

