
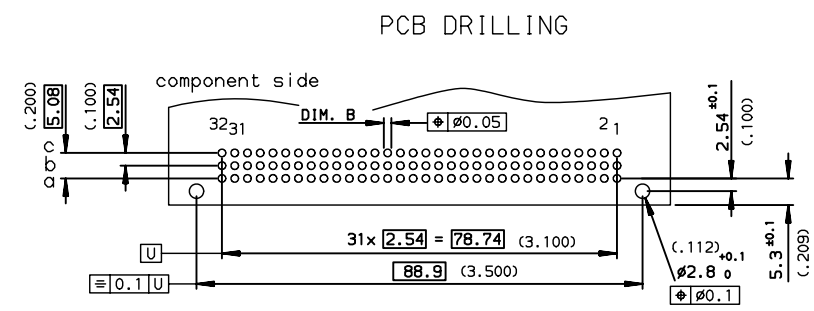


DIMENSIONS mm (inches)

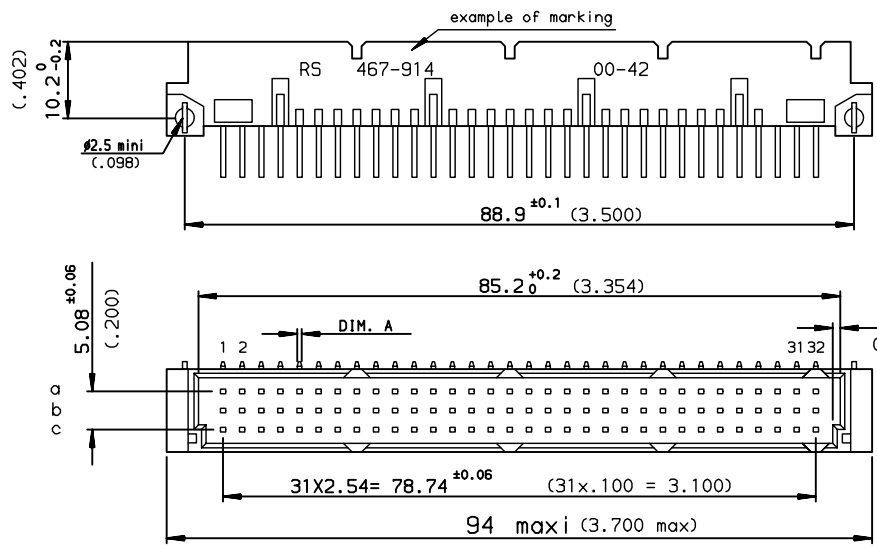

PART NUMBER	8609	<input type="checkbox"/>	<input type="checkbox"/>	71	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	5	<input type="checkbox"/>
PIN OUT									
rows a-b-c				3	96				
rows a-c				4	64				
NUMBER OF CONTACTS									
TERMINATION									
L = 2.75 ±0.15 (.108)				A = $\phi 0.6^{+0.08}_0$	B = $\phi 0.8^{+0.3}_0$			13	
OPTIONS									
no option									7
with harpoons								for PCB thickness 1.6 mm	H
PERFORMANCE CLASS									
DIN 41612 class 3									4
DIN 41612 class 2									5
DIN 41612 class 1									6
TERMINATION TYPE									
TIN LEAD									-485E1
LEAD FREE									-ATLF

SPECIFICATION 485 or ATLF

specific marking : customer part number + date code

GENERAL CHARACTERISTICS and ROHS INFORMATIONS
SEE DRAWING C-8609-0000A

European Views

rev	ecn no	dr	date
A	-	ROU	2000/11/20
B	LS07-0130	HLE	2007/06/04
C	LS07-0211	HLE	2007/08/09
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302 <input checked="" type="checkbox"/>	tolerance std ISO 406 ISO 1101	projection 	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 1.5
0.XX' ±2'		0.XX	±0.1	ECN LS07-0211	
0.XXX		0.XXX	±0.1	Spec ref -	
Dr	ROUILLARD	2000/11/20			
Eng	ROUILLARD	2000/11/20			
Chr	LEGARE	2000/11/20			
Appr	LEGARE	2000/11/20			
Product family		DIN		Spec ref -	
	title RIGHT ANGLE MALE STYLE C SOLDER TO BOARD			dwg no C-8609-0849	Rev. C
catalog no	SEE TABLE	CUSTOMER	sheet 1 of 1		