

Surface Mount Schottky Barrier Diodes Arrays

* “G” Lead(Pb)-Free


Features:

- * Extremely Fast Switching Speed.
- * Low Forward Voltage.
- * Very Small Conduction Losses.
- * PN Junction Guard Ring for Transient and ESD Protection.

Mechanical Data:

- * Case: SOT-363, Molded plastic.
- * Terminals: Solderable per MIL-STD-202, Method 208.
- * Marking: See Diagrams Below & Page 3.
- * Weight: 0.006 grams(approx).




SMALL SIGNAL
SCHOTTKY DIODES
200m AMPERES
30 VOLTS



SOT-363(SC-88)

SOT-363 Outline Dimensions

Unit:mm

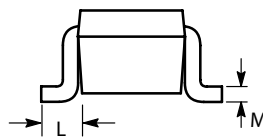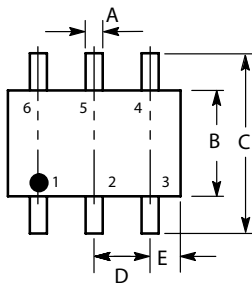

SOT-363		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 REF	
E	0.30	0.40
H	1.80	2.20
J	-	0.10
K	0.80	1.10
L	0.25	0.40
M	0.10	0.25

Maximum Ratings ($T_A=25^{\circ}\text{C}$ Unless otherwise noted)


Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	VRRM VRMW VR	30	V
Average Rectifier Forward Current	IF(AV)	200	mA
Peak Repetitive Forward Current Rated V_R , Square Wave, 20KHz	IFRM	300	mA
Non-Repetitive Forward Current ($t \leq 1.0\text{s}$)	IFSM	600	mA
Power Dissipation	Pd	200	mw
Thermal Resistance, Junction to Ambient Air	R θ JA	625	$^{\circ}\text{C/W}$
Operating Junction Temperature Range	TJ	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	Tstg	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ Unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Breakdown Voltage ($I_R=10\mu\text{A}$)	V(BR)R	30			Volts
Forward Voltage IF=0.1mA IF=1.0mA IF=10mA IF=30mA IF=100mA	VF		0.22 0.29 0.35 0.41 0.52	0.24 0.32 0.40 0.50 1.00	Volts
Total Capacitance ($V_R=1.0\text{V}$, $f=1.0\text{MHz}$)	CT		7.6	10	Pf
Reverse Leakage $V_R=25\text{V}$	IR		0.5	2.0	μA_{dc}
Reverse Recover Time IF=IR=10mA, IR(Rec)=1.0mA	Trr			5.0	nS

Device Marking

Item	Marking	Equivalent Circuit diagram
BAT54TDW	KL5	
BAT54ADW	KL6	
BAT54CDW	KL7	
BAT54SDW	KL8	

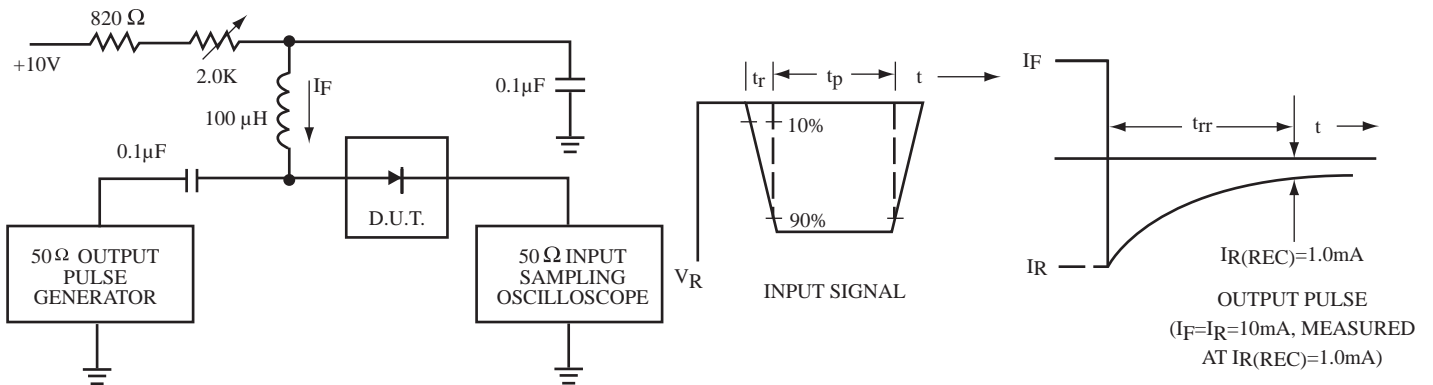

- Notes: 1. A 2.0 kΩ variable resistor for a Forward Current (I_F) of 10 mA
 2. Input pulses is adjusted so $I_R(\text{peak})$ is equal to 10 mA
 3. $t_p \gg t_{rr}$

FIG.1 Recovery Time Equivalent Test Circuit

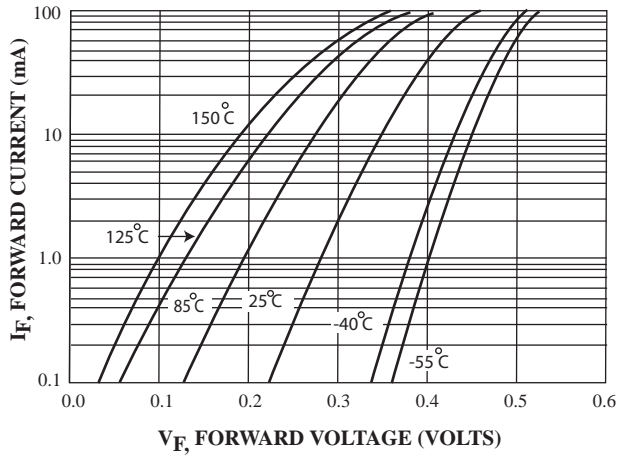


FIG.2 Forward Voltage

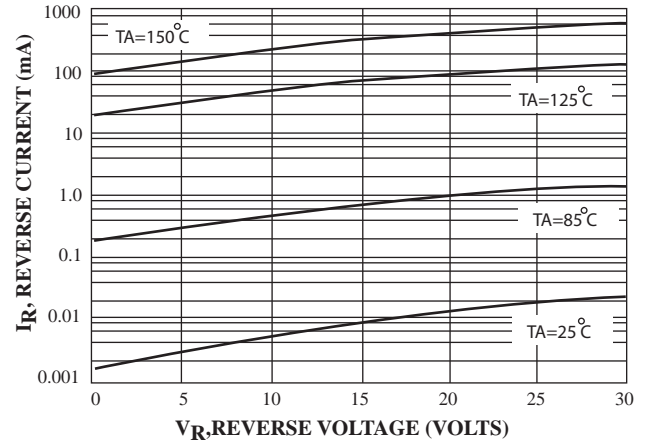


FIG.3 Leakage Current

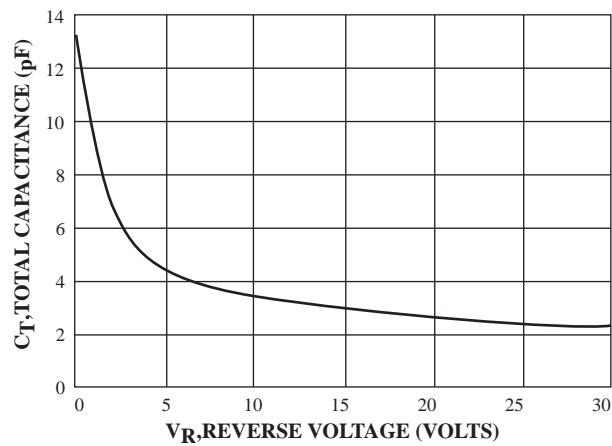


FIG.4 Total Capacitance