


## Single-Phase Bridge Rectifier

### Major Ratings and Characteristics

$I_{F(AV)}$	6 A
$V_{RRM}$	50 V to 1000 V
$I_{FSM}$	200 A
$I_R$	5 $\mu$ A
$V_F$	1.0 V
$T_j$ max.	150 °C

Case Style KBU

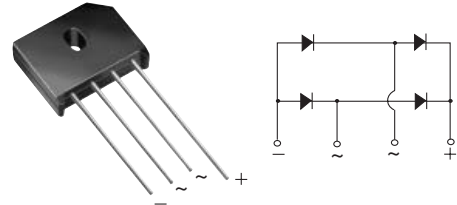

### Features

- UL Recognition file number E54214
- Ideal for printed circuit boards
- High surge current capability
- High case dielectric strength of 1500  $V_{RMS}$
- Meets MSL level 1, per J-STD-020C

### Mechanical Data

**Case:** KBU

Epoxy meets UL-94V-0 Flammability rating

**Terminals:** Silver plated (E4 Suffix) leads, solderable per J-STD-002B and MIL-STD-750, Method 2026

**Polarity:** As marked on body

**Mounting Torque:** 10 cm-kg (8.8 inches-lbs) max.

**Recommended Torque:** 5.7 cm-kg (5 inches-lbs)

### Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Monitor, TV, Printer, SMPS, Adapter, Audio equipment, and Home Appliances applications

### Maximum Ratings

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	KBU6A	KBU6B	KBU6D	KBU6G	KBU6J	KBU6K	KBU6M	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at $T_C = 100$ °C <sup>(1)(2)</sup> at $T_A = 40$ °C <sup>(3)</sup>	$I_{F(AV)}$	6.0 6.0							A
Peak forward surge current single sine-wave superimposed on rated load	$I_{FSM}$	250							A
Operating junction and storage temperature range	$T_J, T_{STG}$	- 50 to + 150							°C

### Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Test condition	Symbols	KBU6A	KBU6B	KBU6D	KBU6G	KBU6J	KBU6K	KBU6M	Units
Maximum instantaneous forward drop per leg	at 6.0 A	$V_F$	1.0							V
Maximum DC reverse current at rated DC blocking voltage per leg	$T_A = 25$ °C	$I_R$	5.0							$\mu$ A mA
	$T_A = 125$ °C		1.0							

### Thermal Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	KBU6A	KBU6B	KBU6D	KBU6G	KBU6J	KBU6K	KBU6M	Units	
Typical thermal resistance per leg <sup>(2)</sup>	$R_{\theta JA}$					8.6				°C/W
	$R_{\theta JC}$					3.1				

Notes:

- (1) Recommended mounted position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw
- (2) Thermal resistance from junction to ambient with units in free air, P.C.B. mounted on 0.5 x 0.5" (12 x 12 mm) copper pads, 0.375" (9.5 mm) lead length
- (3) Thermal resistance from junction to case with units mounted on a 2.6 x 1.4 x 0.06" thick (6.5 x 3.5 x .15 cm) Al. Plate

### Ratings and Characteristics Curves

( $T_A = 25\text{ °C}$  unless otherwise noted)

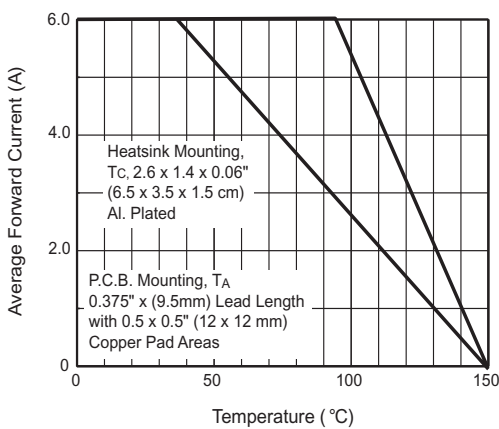


Figure 1. Derating Curve Output Rectified Current

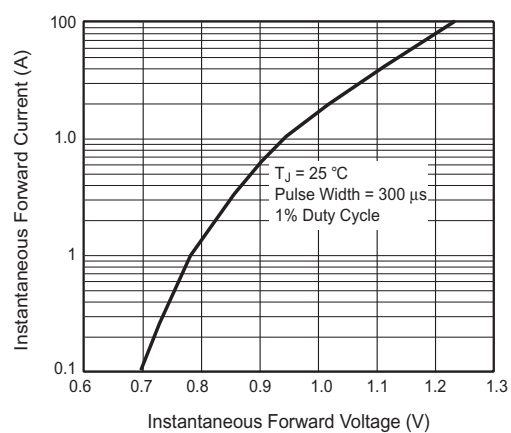


Figure 3. Typical Instantaneous Forward Characteristics Per Leg

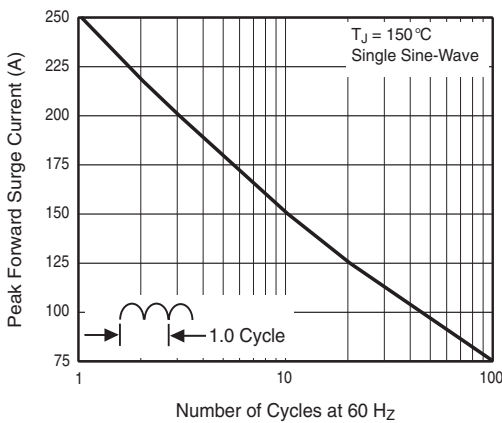


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

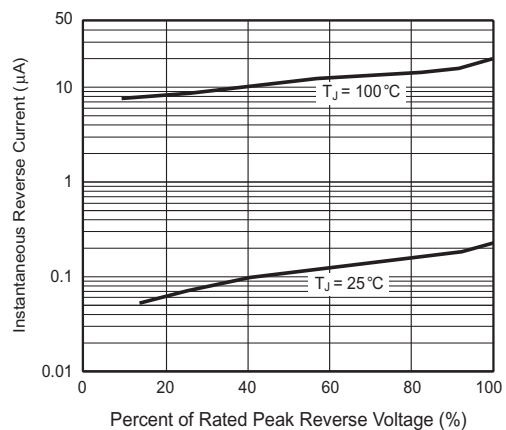


Figure 4. Typical Reverse Leakage Characteristics Per Leg

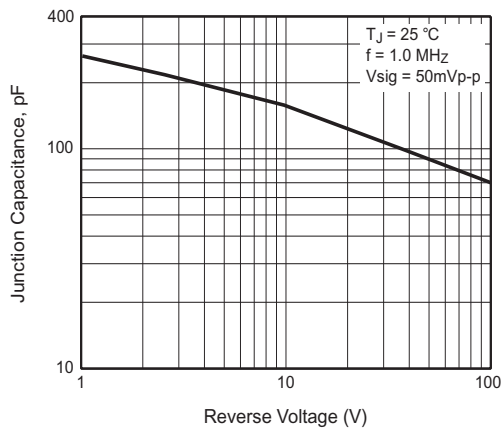


Figure 5. Typical Junction Capacitance Per Leg

## Package outline dimensions in inches (millimeters)

