


# VDSL TRANSFORMERS

## For Use with Broadcom® BCM 6010/6020

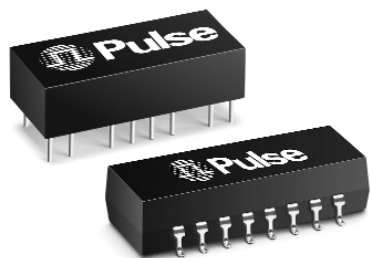

- Supports speeds up to 25.92 Mbps
- Provides two-wire to four-wire conversion
- Surface mount or through hole package


### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Part Number	Turns Ratio		DCR (MAX)	Return Loss (dB MIN)	Insertion Loss* (dB MAX)	Transhybrid Loss (dB MIN)	Longitudinal Balance (dB MIN)	Isolation Voltage (Vrms)
	Trans.	Rec.						
B4008 (THT)	2:1	1:1	0.5 Ω	138 kHz to 1 MHz: 13.5	138 kHz to 20 MHz: 0.5	138 kHz to 1 MHz: 30	138 kHz to 300 kHz: 60	2000
B4025 (SMT)				1 MHz to 20 MHz: 20			300 kHz to 1 MHz: 50	
					1 MHz to 20 MHz: 25	1 MHz to 20 MHz: 30		


**NOTE:** Common Mode Chokes to reduce common mode ingress from AM Broadcast or HAM Radios are available. See data sheet B912 for parts B4001 and B4003.  
**Surge Voltage Capability:** Metallic: 800 Vpeak 10/560 µsec. Long.: 2400 Vpeak 10/700 µsec.  
**Surge over the Extended Temperature Range:** Insertion Loss can increase to 1 dB. Return Loss can drop to 7 dB from 138 kHz to 300 kHz, and 12 dB from 300 kHz to 1 MHz.

## Mechanicals

### B4008

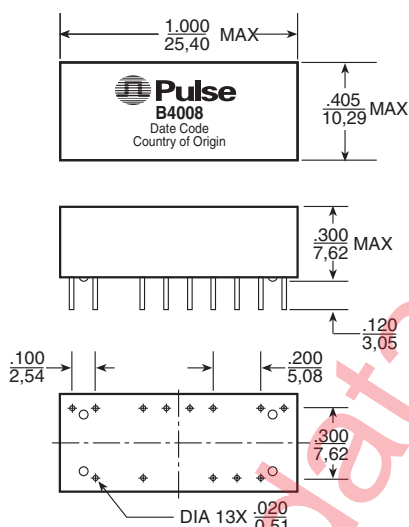


### B4025

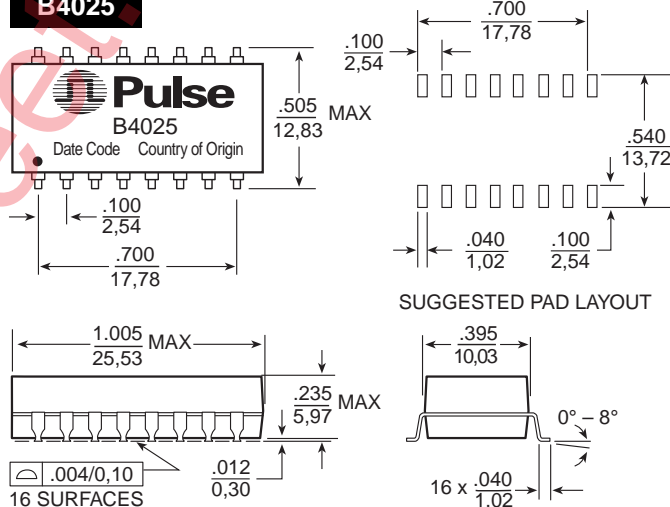


## Schematics

### B4008



### B4025



Weight.....2.8 grams  
 Tube......20/tube

Dimensions: Inches  
mm  
 Unless otherwise specified, all tolerances are ± .010 / 0.25

## For More Information :

### UNITED STATES (Worldwide)

12220 World Trade Drive  
 San Diego, CA 92128  
 U.S.A.  
<http://www.pulseeng.com>  
 TEL: 858 674 8100  
 FAX: 858 674 8262

### UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road  
 The Surrey Research Park  
 Guildford, Surrey GU2 5RE  
 United Kingdom  
 TEL: 44 1483 401700  
 FAX: 44 1483 401701

### FRANCE (Southern Europe)

Zone Industrielle  
 F-39270  
 Orgelet  
 France  
 TEL: 33 3 84 35 04 04  
 FAX: 33 3 84 25 46 41

### SINGAPORE (Southern Asia)

150 Kampong Ampat  
 #07-01/02  
 KA Centre  
 Singapore 368324  
 TEL: 65 6287 8998  
 FAX: 65 6280 0080

### TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1  
 HsinTai Wu Road  
 Hsi-Chih, Taipei Hsien  
 Taiwan, R.O.C.  
 Tel: 886 2 2698 0228  
 FAX: 886 2 2698 0948

### HONG KONG (China/Hong Kong)

9/F, Phase 2, Tai Sang  
 Shatin Warehouse Centre  
 6 Wong Chuk Yeung Street  
 Fotan, Shatin, Hong Kong  
 TEL: 852 2788 6588  
 FAX: 852 2776 1055

### DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners.

Printed on recycled paper. ©2003, Pulse Engineering, Inc.

**B925.A (11/03)**