


Circuit Diagram

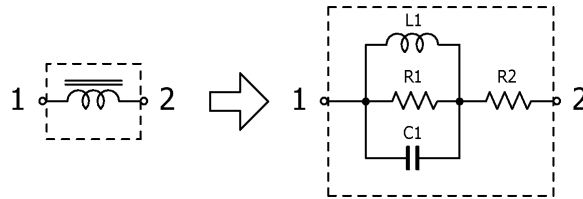


Circuit Parameters

Part No.	L1[μ H]	R1[ohm]	C1[pF]	R2[ohm]
NLCV32T-1R0M-PF	1	2301.6	0.4801	0.06
NLCV32T-1R5M-PF	1.5	3030.4	1.1619	0.11
NLCV32T-2R2M-PF	2.2	3394.8	1.3766	0.13
NLCV32T-3R3M-PF	3.3	4845.0	1.4544	0.16
NLCV32T-4R7M-PF	4.7	7472.1	1.2277	0.2
NLCV32T-6R8M-PF	6.8	9493.2	1.7727	0.27
NLCV32T-100K-PF	10	11993	1.4492	0.36
NLCV32T-150K-PF	15	16284	1.3964	0.56
NLCV32T-220K-PF	22	21741	1.3762	0.77
NLCV32T-330K-PF	33	28225	1.4539	1.1
NLCV32T-470K-PF	47	34699	1.4755	1.64
NLCV32T-680K-PF	68	49362	1.3444	2.8
NLCV32T-101K-PF	100	71148	1.5885	3.7
NLCV32T-151K-PF	150	85983	2.0177	6.1
NLCV32T-221K-PF	220	104852	1.8135	8.4
NLCV32T-331K-PF	330	131707	1.7474	12.3

Data Sheet Live

Circuit Diagram

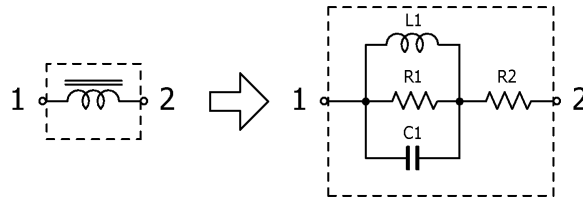

Circuit Parameters

Part No.	L1[μ H]	R1[ohm]	C1[pF]	R2[ohm]
NLCV32T-R10M-PFR	0.1	377.11	0.5353	0.02
NLCV32T-R15M-PFR	0.15	548.80	0.2429	0.024
NLCV32T-R22M-PFR	0.22	684.09	0.5081	0.027
NLCV32T-R33M-PFR	0.33	1064.3	0.2529	0.035
NLCV32T-R47M-PFR	0.47	1219.4	0.4967	0.038
NLCV32T-R68M-PFR	0.68	1621.0	0.8619	0.045
NLCV32T-1R0M-PFR	1	2475.0	1.3221	0.055
NLCV32T-1R5M-PFR	1.5	2720.7	1.8682	0.095
NLCV32T-2R2M-PFR	2.2	4543.3	1.3766	0.115
NLCV32T-3R3M-PFR	3.3	5761.3	1.7734	0.16
NLCV32T-4R7M-PFR	4.7	7819.7	1.4760	0.2
NLCV32T-6R8M-PFR	6.8	10062	1.7972	0.29
NLCV32T-100K-PFR	10	13347	1.9104	0.42