




Agilent N1810/1/2 Coaxial Switches

High Quality Electromechanical Switches for Microwave and RF Manufacturing Test Systems

Product Overview

- High isolation - >120 dB@4 GHz
- High repeatability - <0.03 dB typical
- Low SWR - <1.10 @4 GHz
- Low-insertion loss - <0.22 dB@4 GHz
- Long life - >5 million cycles

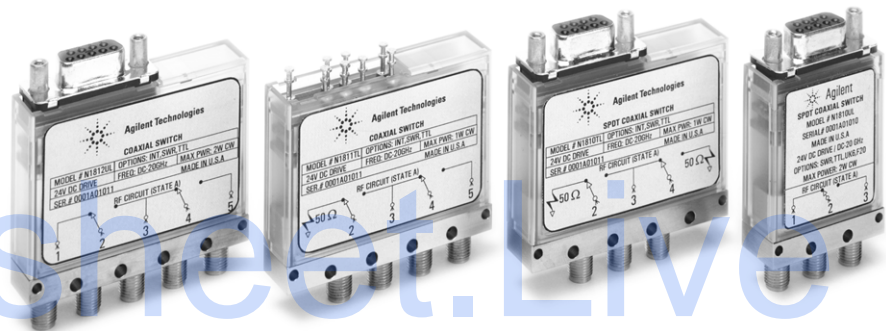

The solution for high-volume wireless communications test

- dc to 2 GHz
- dc to 4 GHz
- dc to 20 GHz
- dc to 26.5 GHz

In today's fast moving technical industries, test engineers need components they can count on. Agilent now offers a new line of latching coaxial switches that combine legendary reliability with the widest range of performance options available today.

Reduce downtime

Agilent Technologies is the world leader in innovating and developing microwave accessories for communications and aerospace applications. Our innovative design and strict adherence to quality process control ensure that each switch is guaranteed to perform within warranted specifications for its entire lifetime. With fewer breakdowns and less need to recalibrate, your test platform moves quicker with less downtime, creating more throughput and revenue.

Raise your standards

All Agilent switches offer excellent repeatability and long life – up to five times the lifecycles of the competition. Add to this aggressive specs for isolation, SWR, and insertion loss, and you have a switch that impresses even the most demanding engineer with its precision and durability.

Increase flexibility

For test systems that require extra functionality or increased performance, the N181x family of switches has a solution that fits your need. The options include:

- Reduced SWR
- Increased isolation
- Standard or TTL drive
- 5, 15, 24 volt drive
- Position indicators
- Current interrupts

Increase productivity

When you buy your switches from Agilent, you notice a difference. Your test platforms run smoother, longer and faster, while yielding more viable and valuable measurements.



Agilent Technologies

Innovating the HP Way

Description

N1810UL

Unterminated latching

The Agilent N1810UL is a single-pole double-throw switch available in the frequency range from dc to 26.5GHz. In precision measurements and monitoring applications where insertion loss repeatability is crucial, these switches operate in excess of 5 million cycles with better than .03 dB of insertion loss repeatability at 25° C.

N1810TL

Terminated latching

The Agilent N1810TL is a single-pole double-throw switch available in the frequency range from dc to 26.5 GHz. The unused port is terminated 50 ohms, making it ideal for applications where port matching is required.

N1811TL

Terminated latching

The N1811TL is a terminated bypass switch available in the frequency range from dc to 26.5 GHz. The switch's internal load can terminate the device under test when in the bypass mode (up to 1 watt). Because of its compact design, it is ideal for drop-in, drop-out applications.

N1812UL

Unterminated latching

The N1812UL is a versatile, unterminated 5-port switch available in the frequency range from dc to 26.5 GHz. In transfer switch applications, the fifth port can be terminated externally with a high-power termination. It can also be utilized for signal path reversal or as a calibration port.

Technology

Agilent Technologies switches are designed with a rectangular coaxial structure similar to edge-line. This transmission line structure provides for movement of the edge-line center conductor between two fixed, continuous ground planes. The main advantage of this innovation is that the moving contacts can be easily activated, yet maintain high-isolation and low-insertion loss.

The RF contact configuration is designed for controlled wiping action. Since the outer conductor is not part of the switching function, repeatability and life are improved. The switching action occurs typically within 15 milliseconds, after which permanent magnets latch the contacts to retain the new switch position.

Operation

All switches are "break before make": the switched ports are not connected to each other. This helps to prevent possible damage to sensitive circuits and enhances test simplicity.


Driving

There are two positions for the N181x family of switches. Standard switching is accomplished by applying the supply voltage to pin 5 (+V) and grounding either pin 4 (DA) or pin 3 (DB) to actuate the mechanism to the desired state. See page 3, Pin out diagram.

When option 403 is added, the drive current is automatically disconnected after the switch is fully latched (15ms). Without option 403, the switches MUST be actuated using a pulse drive--the switches are not designed to withstand continuous current. In this case, the pulse duration must be at least 15ms to ensure that the switch will fully latch.







Option 401 drives the switch with TTL/5V CMOS compatible logic.

Option 402 provides electronic indication of switch state. The circuitry consists of two independent commons, which can be connected to outputs corresponding to either position A or B. Because the commons are electrically isolated from each other as well as the drive circuit, this option allows two position signals to be obtained.

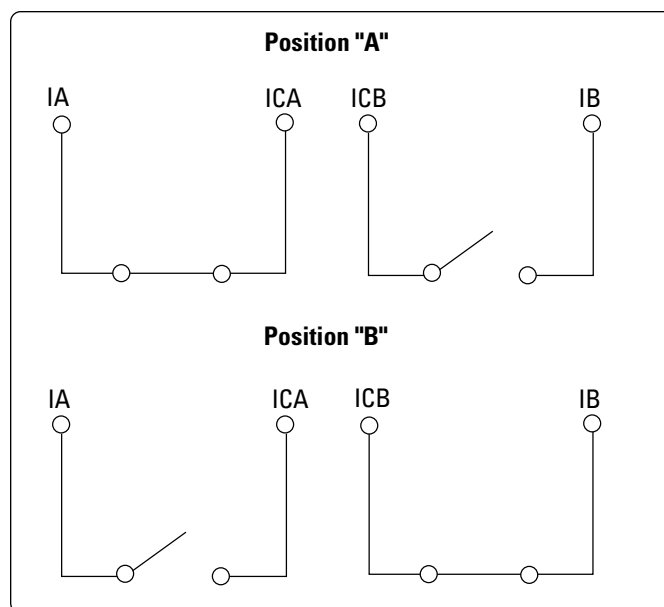


Indicator option circuit diagram





N1810UL

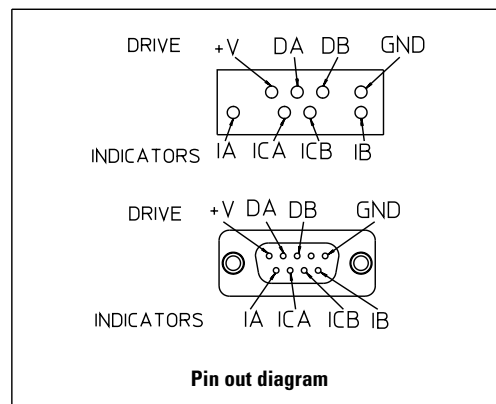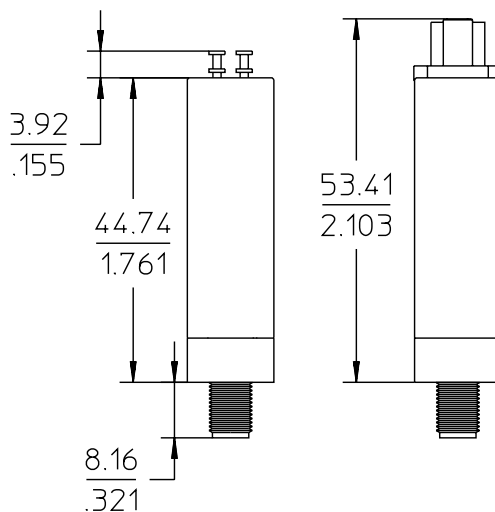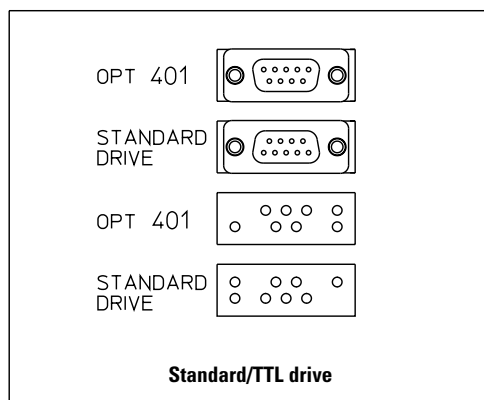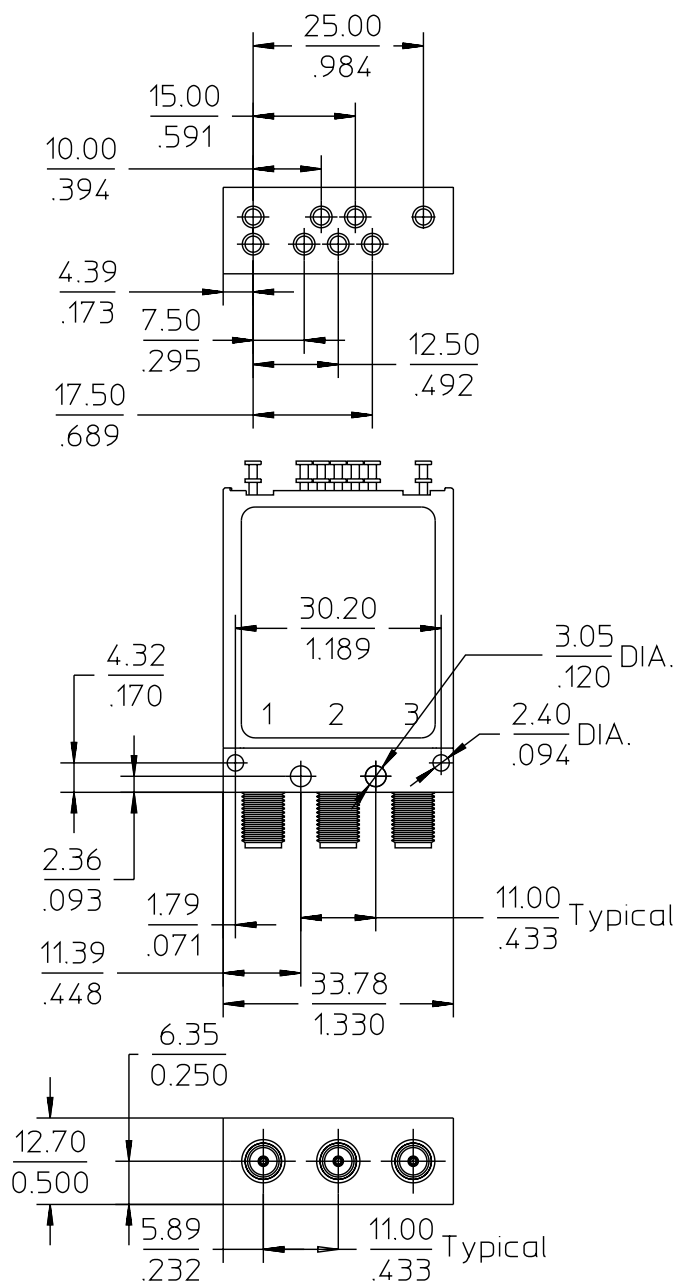


Driving State	Logic Standard	Logic Option 401	Indicator	Indicator	Indicator	Indicator	Indicator	Indicator	Indicator
"A"	DA	DB	DA	DB	GND	ICA-IA	ICB-IB	CLOSED	OPEN
"B"	GND	OPEN	HI	LO	GND	CLOSED	OPEN	CLOSED	CLOSED








N1810TL

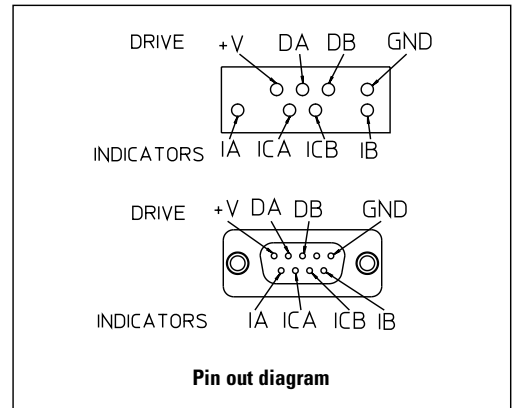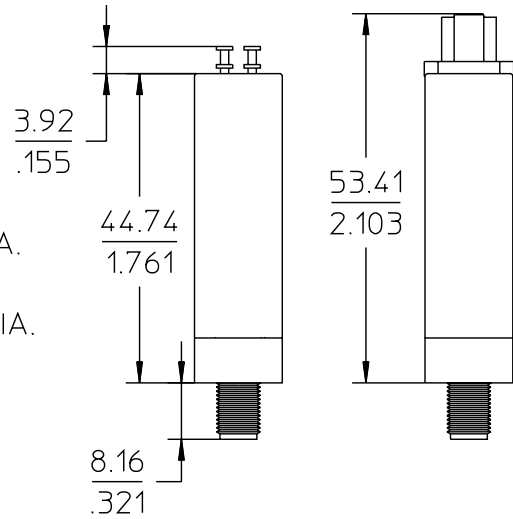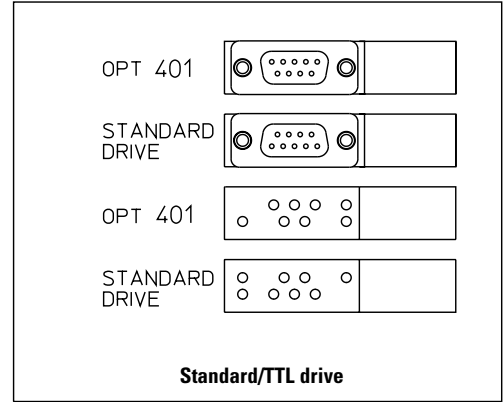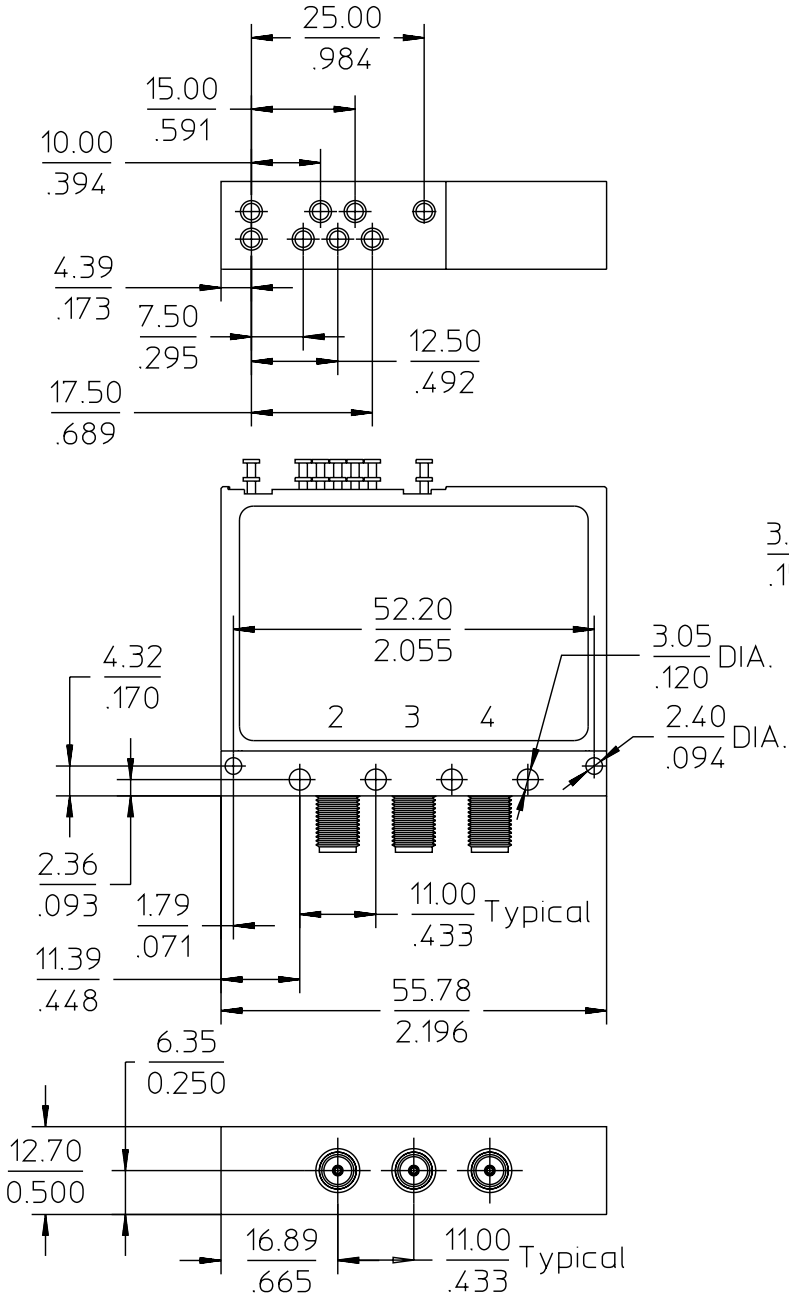


Driving State	Logic Standard	Logic DB	Option 401 DA	Option 401 DB	GND	Indicator	CKTs
"A"	DA	DB	DA	DB	GND	ICA-IA	ICB-IB
"B"	GND	OPEN	HI	LO	GND	CLOSED	OPEN
	OPEN	GND	LO	HI	GND	OPEN	CLOSED








N1811TL

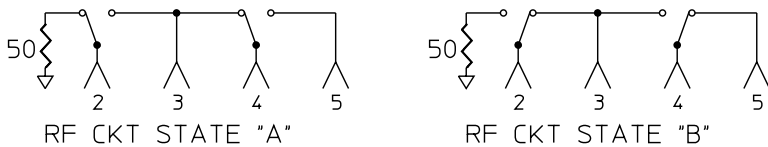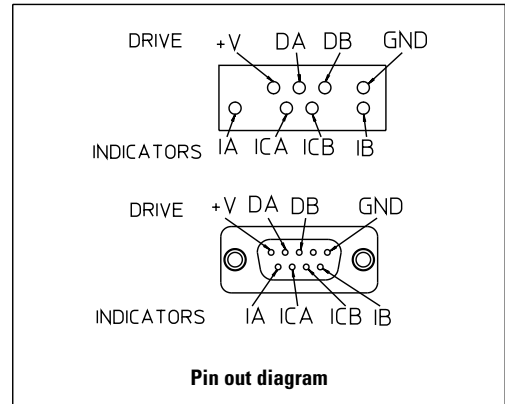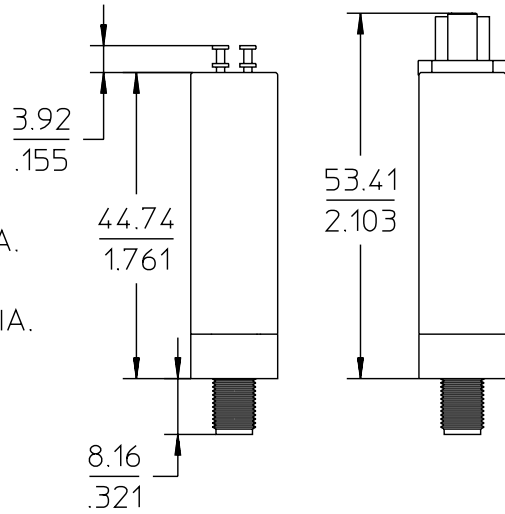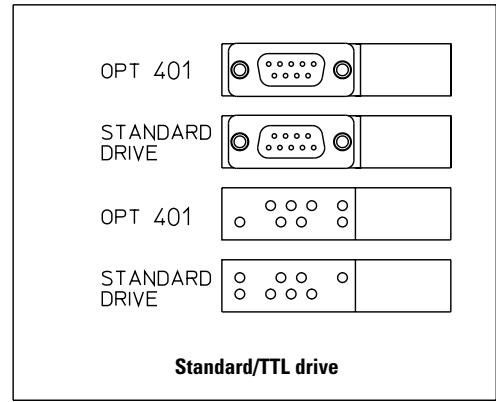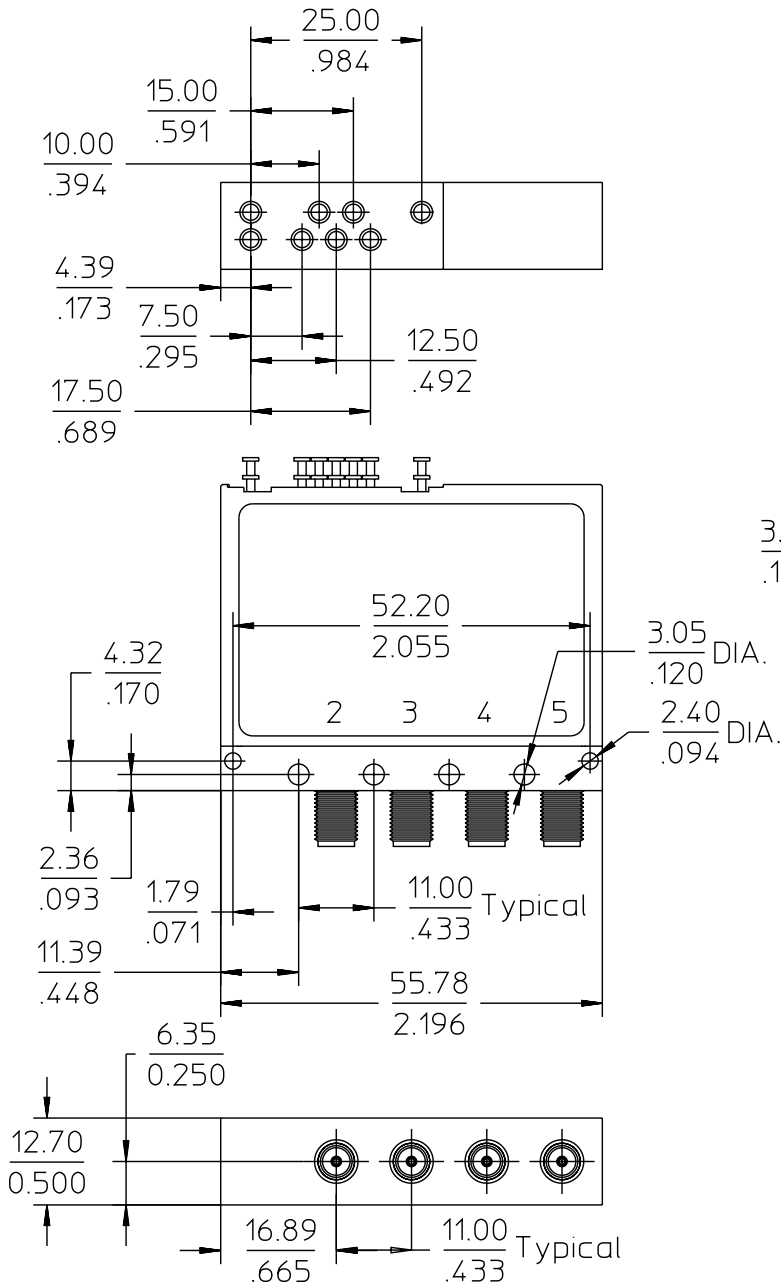


Driving State	Logic Standard	Logic Option 401	Indicator	Indicator CKTs
"A"	DA GND, DB OPEN	DA HI, DB LO	GND	ICA-IA CLOSED, ICB-IB OPEN
"B"	DA OPEN, DB GND	DA LO, DB HI	GND	ICA-IA OPEN, ICB-IB CLOSED



N1812UL

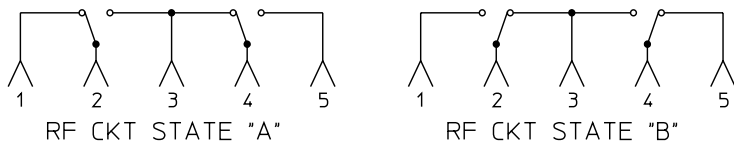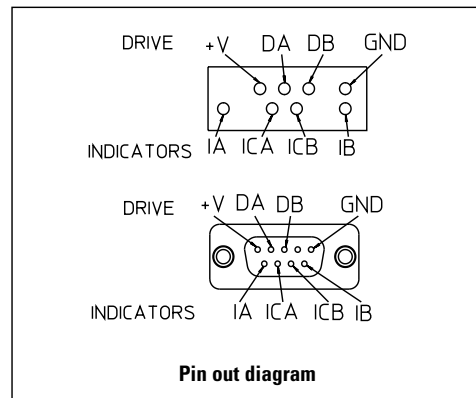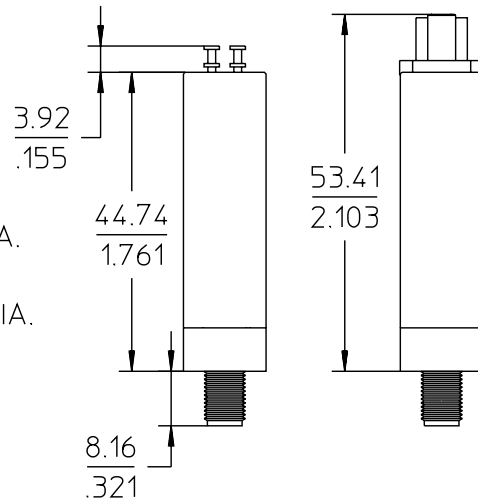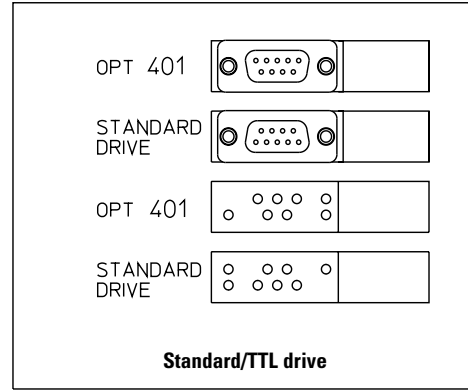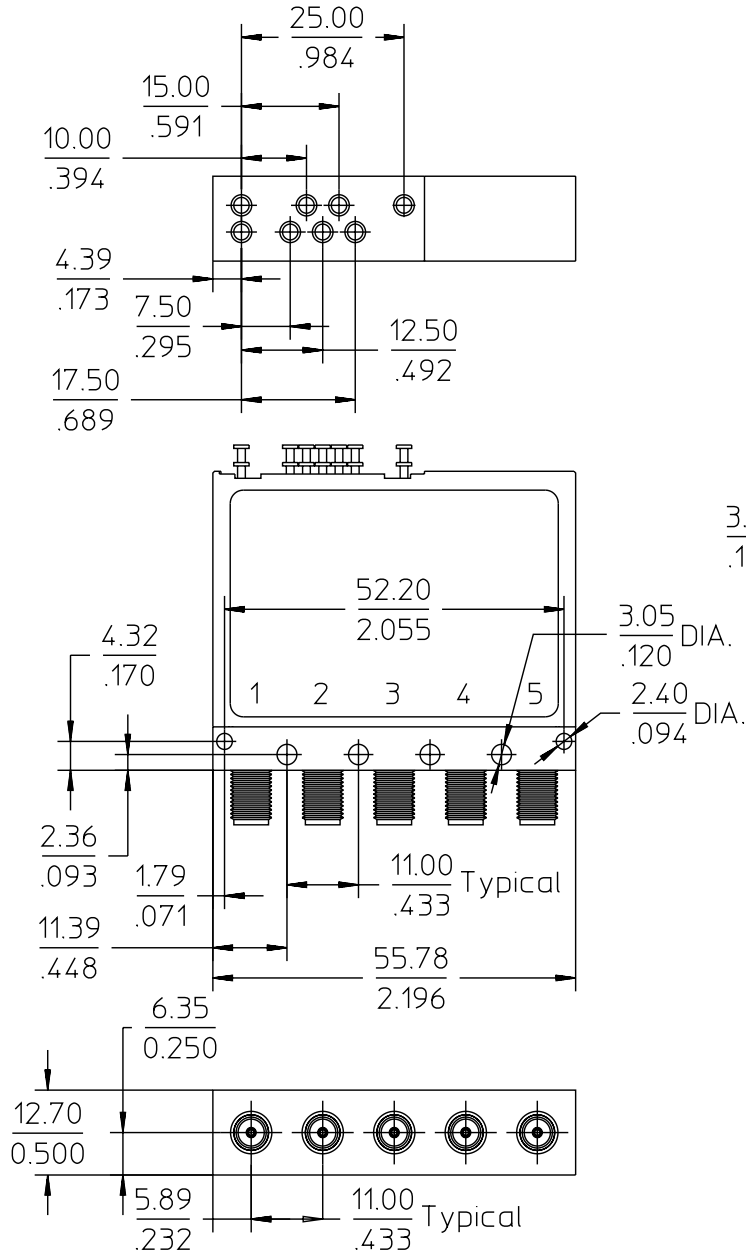

Driving State	Logic Standard	Logic Option	401 Standard	401 Option	Indicator	CKTs
"A"	DA	DB	DA	DB	GND	ICA-IA
"B"	GND	OPEN	HI	LO	GND	ICB-IB
	OPEN	GND	LO	HI	GND	CLOSED
						OPEN
						CLOSED



Specifications

General	
Input power (into load)	1W, 7V dc, 50W pk, 10ms max pulse duration, not to exceed 1W avg
Input power (into thru)	2W, 7V dc, 50W pk, 10ms max pulse duration, not to exceed 2W avg
Life	> 5 Million
Coil voltage	5, 15, 24 VDC
Switching time	< 15ms
Repeatability	< 0.03 dB Typical

Environmental

The switch is designed to fully comply with Agilent Technologies' product operating environment specifications. The following summarizes the environmental specifications for these products (Class B1).

Temperature:

Operating:	-25 to +75 deg C
Storage:	-55 to +85 deg C
Cycling:	-55 to +85 deg C, 10 cycles per MIL-STD 202F, 170D, Condition A (modified)

Vibration:

Operating:	7g, 5-2000 Hz @ 0.25in. p-p
Survival:	20g, 20-2000 Hz @ 0.06 in. p-p, 4min/cycle, 4cycles/axis
Random:	2.41 g (rms.) 10min/axis
Shock:	Half sine: 500 g @ 0.5 ms, 3 drops/direction, 18 total
Operating:	50g @ 6 ms, 6 directions

Humidity:

Operating:	15 to 95 % relative humidity
Storage:	65C, 95% RH, 10 days, MIL-STD 202F, Method 106E

Altitude:

Operating:	15,000 feet / 4.6 km
Storage:	50,000 feet / 15.3 km, MIL-STD 202F, Method 105C, Condition B

General operating characteristics - N181x series			
Switching speed	Repeatability	Life	Impedance
< 15ms	< .03db typical	> 5mil cycles	50ohms

RF Performance*

Standard performance specifications - N181x series					
Isolation (dB)	= 90 - 1.13 X F, where F is specified in GHz				
	dc	4 GHz	12.4 GHz	20 GHz	26.5 GHz
	90	85	76	67	60
Insertion loss (dB)	= 0.3 + 0.019 X F, where F is specified in GHz				
	dc	4 GHz	12.4 GHz	20 GHz	26.5 GHz
	0.30	0.38	0.53	0.68	0.80
SWR	dc-2 GHz	2-4 GHz	4-12.4 GHz	12.4-20 GHz	20-26.5 GHz
	1.10	1.15	1.20	1.30	1.60


Optional high-performance specifications - N181x series					
Isolation (dB)	= 125 - 1.32 X F, where F is specified in GHz				
	dc	4 GHz	12.4 GHz	20 GHz	26.5 GHz
Opt. 301	125	120	109	99	90
Insertion loss (dB)	= 0.15 + 0.017 X F, where F is specified in GHz				
	dc	4 GHz	12.4 GHz	20 GHz	26.5 GHz
Opt. 302	0.15	0.2	0.31	0.41	0.6
SWR	dc-2 GHz	2-4 GHz	4-12.4 GHz	12.4-20 GHz	20-26.5 GHz
	Opt. 302	1.05	1.1	1.15	1.2

* Specifications include margins for measurement uncertainties

Ordering information

Required - Specify one model number, one frequency, one coil voltage, and one DC connector type

Optional - Specify RF performance enhancements and drive options (may select any, all, or none)

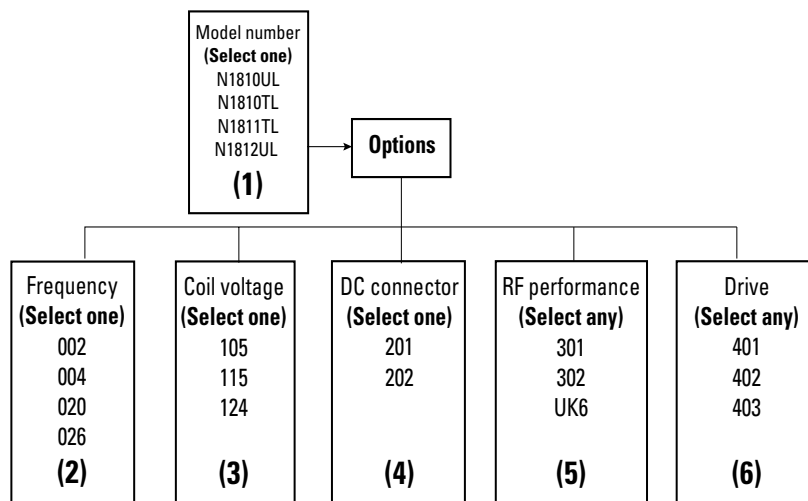

(1) Select a model to fit your application. (Required)

- N1810UL – Unterminated latching 3-port
- N1810TL – Terminated latching 3-port
- N1811TL – Terminated latching 4-port
- N1812UL – Unterminated latching 5-port

(2) Select a frequency range. (Required)

- 002 - DC to 2GHz
- 004 - DC to 4GHz
- 020 - DC to 20GHz
- 026 - DC to 26.5GHz

(3) Select a coil voltage level. (Required)

- 105* – 5 volts
- 115 – 15 volts
- 124 – 24 volts

(4) Select a DC connector type. (Required)

- 201 – “D” subminiature 9 pin female
- 202 – Solder lugs

(5) Select RF performance enhancements. (Optional)

- 301 – Increased isolation
- 302 – Reduced standing wave ratio and insertion loss
- UK6 – Calibration certificate with test data

(6) Select drive options. (Optional)

- 401 – TTL/CMOS compatible 5v drive
- 402 – Position indicators
- 403 – Current interrupts

Ordering example:

For an unterminated 5 port switch, operating up to 20 GHz, with 15 volt coils, D-sub connector, high isolation, and TTL, the order should look as follows:
N1812UL Opt 020 115 201 301 401

*Includes options 402 and 403

Agilent Technologies’ Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlay Agilent’s overall support policy: “Our Promise” and “Your Advantage.”

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contacting us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

For more assistance with your test and measurement needs go to

www.agilent.com/find/assist

Product specifications and descriptions in this document subject to change without notice.

**Copyright © 2000 Agilent Technologies
Printed in USA 09/2000
5968-9653E**



Agilent Technologies

Innovating the HP Way