

General-purpose Operational Amplifiers /Comparators

TROPHY SERIES

Comparators




LM393DR/PWR/DGKR, LM2903DR/PWR/DGKR/VQDR/VQPWR
LM339DR/PWR, LM2901DR/PWR/VQDR/VQPWR

No.11094EBT03

●Description



The Universal Standard family LM393 / LM339/ LM2903 / LM2901 monolithic ICs integrate two/four independent comparators on a single chip and feature high gain, low power consumption, and an operating voltage range from 2[V] to 36[V] (single power supply).

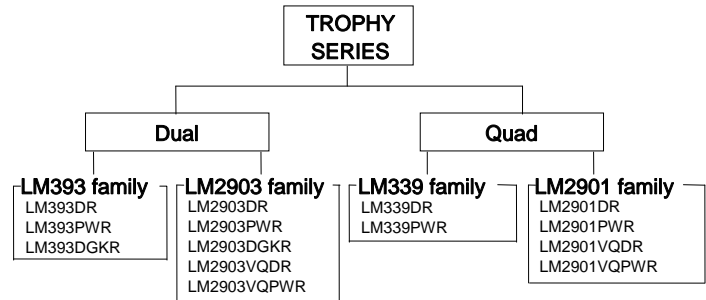

●Features

- 1) Operating temperature range
Commercial Grade LM339/393 family : 0[°C] to + 70[°C]
Extended Industrial Grade LM2903/2901 family : -40[°C] to +125[°C]
- 2) Open collector output
- 3) Single / dual power supply compatible
- 4) Low supply current
0.8[mA] typ. (LM393/339/2903/2901 family)
- 5) Low input-bias current: 25[nA] typ.
- 6) Low input-offset voltage: 2[mV] typ.
- 7) Differential input voltage range equal to maximum rating
- 8) Low output saturation voltage
- 9) TTL,MOS,CMOS compatible output

●Pin Assignment

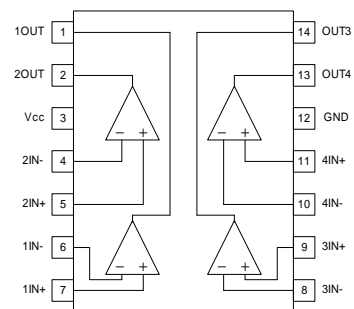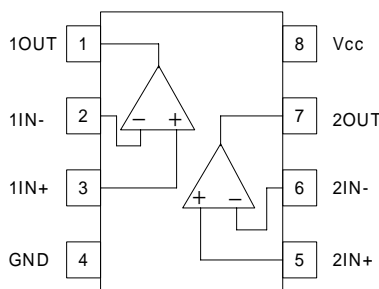

SOIC8

LM393DR
LM2903DR
LM2903VQDR

TSSOP8

LM393PWR
LM2903PWR
LM2903VQPWR

MSOP8/VSSOP8

LM393DGKR
LM2903DGKR

SOIC14

LM339DR
LM2901DR
LM2901VQDR

TSSOP14

LM339PWR
LM2901PWR
LM2901VQPWR

●Absolute Maximum Ratings (Ta=25°C)

| Parameter | Symbol | Ratings | | | | Unit |
|------------------------------|---------|--------------|--------------|---------------|---------------|------|
| | | LM393 family | LM339 family | LM2903 family | LM2901 family | |
| Supply Voltage | Vcc-GND | +36 | | | | V |
| Input Differential Voltage | Vid | ±36 | | | | V |
| Common-mode Input | Vicm | -0.3 to +36 | | | | V |
| Operating Temperature | Topr | 0 to +70 | | -40 to +125 | | °C |
| Storage Temperature Range | Tstg | -65 to +150 | | | | °C |
| Maximum Junction Temperature | Tj | +150 | | | | °C |

●Electric Characteristics

OLM393/339 family(Unless otherwise specified, Vcc=+5[V])

| Parameter | Symbol | Temperature range | Limits | | | | | | Unit | condition | Fig. No. |
|---|--------|-------------------|--------------|------|---------|--------------|------|---------|------|--|----------|
| | | | LM393 family | | | LM339 family | | | | | |
| | | | Min. | Typ. | Max. | Min. | Typ. | Max. | | | |
| Input Offset Voltage ^(*) | VIO | 25°C | — | 2 | 7 | — | 2 | 7 | mV | Vcc=5 to 30[V],VO=1.4[V] VIC=VIC(min) | 88 |
| | | Full range | — | — | 9 | — | — | 9 | | | |
| Input Offset Current ^(*) | IIO | 25°C | — | 5 | 50 | — | 5 | 50 | nA | VO=1.4[V] | 88 |
| | | Full range | — | — | 250 | — | — | 150 | | | |
| Input Bias Current ^(*) | IIB | 25°C | — | 25 | 250 | — | 25 | 250 | nA | VO=1.4[V] | 88 |
| | | Full range | — | — | 400 | — | — | 400 | | | |
| Common-mode Input Voltage Range | VICR | 25°C | — | — | Vcc-1.5 | — | — | Vcc-1.5 | V | — | 88 |
| | | Full range | — | — | Vcc-2.0 | — | — | Vcc-2.0 | | | |
| Large Signal Differential Voltage Amplification | AVD | 25°C | 25 | 200 | — | 25 | 200 | — | V/mA | Vcc=15[V] VO=1.4 to 11.4[V], RL ≥ 15[kΩ],VRL=15[V] | 88 |
| High Level Output Current | IOH | 25°C | — | 0.1 | — | — | 0.1 | — | nA | VID=1[V],VO=5[V] | 89 |
| | | Full range | — | — | 1 | — | — | 1 | μA | VID=1[V],VO=30[V] | |
| Low Level Output Voltage | VOL | 25°C | — | 150 | 400 | — | 150 | 400 | mV | VID=-1[V],IOL=4[mA] | 89 |
| | | Full range | — | — | 700 | — | — | 700 | | | |
| Low Level Output Current | IOL | 25°C | 6 | — | — | 6 | 16 | — | mA | VID=-1[V],VOL=1.5[V] | 89 |
| Supply Current | ICC | 25°C | — | 0.8 | 1 | — | 0.8 | 2 | mA | RL=∞,Vcc=5V | 89 |
| | | Full range | — | — | 2.5 | — | — | — | | RL=∞,Vcc=30[V] | |
| Response Time | Tre | 25°C | — | 1.3 | — | — | 1.3 | — | μs | RL=5.1[kΩ],VRL=5[V],CL=15pF VIN=100[mVp-p], overdrive=5[mV] | 89 |
| | | | — | 0.3 | — | — | 0.3 | — | | RL=5.1[kΩ],VRL=5[V],CL=15pF VIN=TTL-Level input step Vref=1.4[V] | |

(*) Absolute value

OLM2903/2901 family (Unless otherwise specified, Vcc=+5[V])

| Parameter | Symbol | Temperature range | Limits | | | | | | Unit | Condition | Fig. No | |
|---|-------------------------|-------------------|---------------|------|---------|---------------|------|---------|------|--|---|----|
| | | | LM2903 family | | | LM2901 family | | | | | | |
| | | | Min. | Typ. | Max. | Min. | Typ. | Max. | | | | |
| Input Offset Voltage ^{(*)2} | VIO | 25°C | — | 2 | 7 | — | 2 | 7 | mV | Vcc=5 to MAX, VO=1.4[V] VIC=VIC (min) | 88 | |
| | | Full range | — | — | 15 | — | — | 15 | | | | |
| Input Offset Current ^{(*)2} | IIO | 25°C | — | 5 | 50 | — | 5 | 50 | nA | VO=1.4[V] | 88 | |
| | | Full range | — | — | 200 | — | — | 200 | | | | |
| Input Bias Current ^{(*)2} | IIB | 25°C | — | 25 | 250 | — | 25 | 250 | nA | VO=1.4[V] | 88 | |
| | | Full range | — | — | 500 | — | — | 500 | | | | |
| Common-mode Input Voltage Range | VICR | 25°C | — | — | Vcc-1.5 | — | — | Vcc-1.5 | V | — | 88 | |
| | | Full range | — | — | Vcc-2.0 | — | — | Vcc-2.0 | | | | |
| Large Signal Differential Voltage Amplification | AVD | 25°C | 25 | 100 | — | 25 | 100 | — | V/mV | Vcc=15[V], VOUT=1.4 to 11.4[V], RL ≥ 15[kΩ], VRL=15[V] | 88 | |
| High Level Output Current | IOH | 25°C | — | 0.1 | — | — | 0.1 | — | nA | VID=1[V], VOH=5[V] | 89 | |
| | | Full range | — | — | 1 | — | — | 1 | μA | VID=1[V], VOH=MAX | | |
| Low Level Output Voltage | LM2901 ^{(*)3} | VOL | 25°C | — | 150 | 400 | — | 150 | 500 | mV | VIN(-)=1[V], VIN(+)=0[V] ISINK ≤ 4[mA] | 89 |
| | LM2901V ^{(*)3} | | 25°C | — | 150 | 400 | — | 150 | 400 | | | |
| | Full range | | — | — | 700 | — | — | 700 | | | | |
| Low Level Output Current | IOL | 25°C | 6 | 16 | — | 6 | 16 | — | mA | VID=-1[V], VOL=1.5[V] | 89 | |
| Supply Current | ICC | 25°C | — | 0.8 | 2 | — | 0.8 | 2 | mA | RL=∞, Vcc=5V | 89 | |
| | | | — | 1 | 2.5 | — | 1 | 2.5 | | RL=∞, Vcc=MAX ^{(*)7} | | |
| Response Time | Tre | 25°C | — | 1.3 | — | — | 1.3 | — | μs | RL=5.1[Ω], VRL=5[V], CL=15pF VIN=100[mVp-p], Overdrive=5[mV] | 89 | |
| | | | — | 0.3 | — | — | 0.3 | — | | RL=5.1[kΩ], VRL=5[V], CL=15pF VIN=TTL-Level input step Vref=1.4[V] | | |

(*)2 Absolute value

(*)3 Supply Voltage Maximum Value LM2901DR, LM2901PWR MAX=30[V], LM2901VQDR, LM2901VQPWR MAX=32[V]

●Reference Data LM393 family

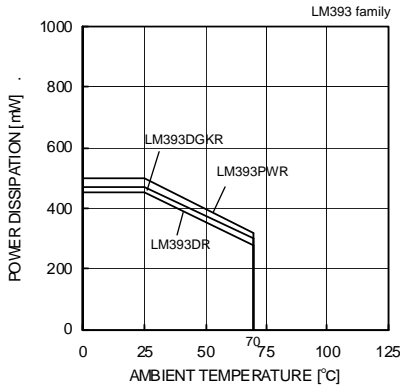


Fig. 1
Derating Curve

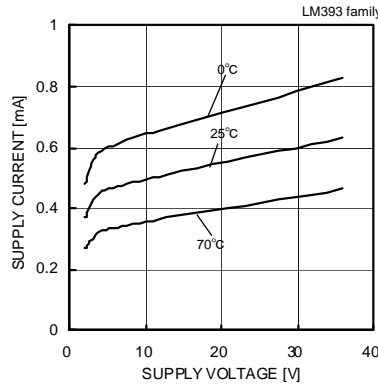


Fig. 2
Supply Current – Supply Voltage

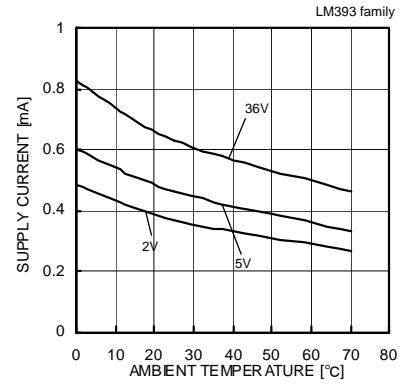


Fig. 3
Supply Current – Ambient Temperature

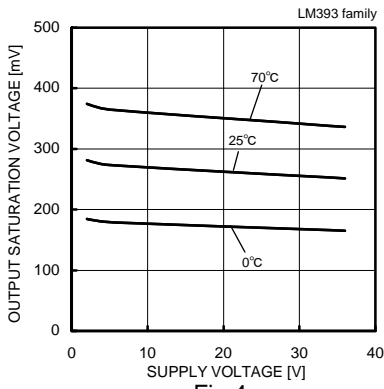


Fig. 4
Output Saturation Voltage
– Supply Voltage
(IOL=4[mA])

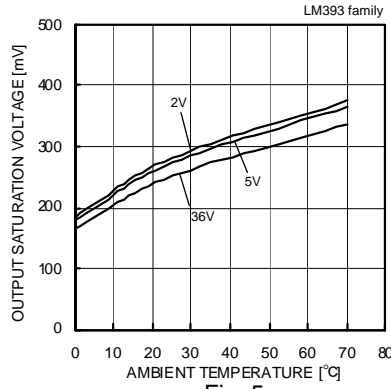


Fig. 5
Output Saturation Voltage
– Ambient Temperature
(IOL=4[mA])

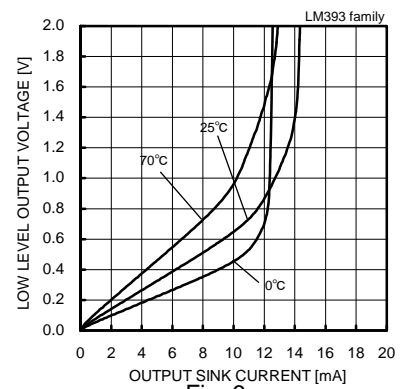


Fig. 6
Low Level Output Voltage
– Output Sink Current
(VCC=5[V])

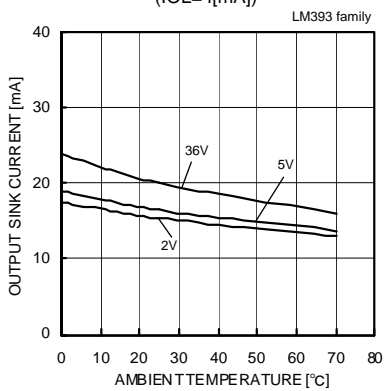


Fig. 7
Output Sink Current – Ambient Temperature
(VOUT=1.5[V])

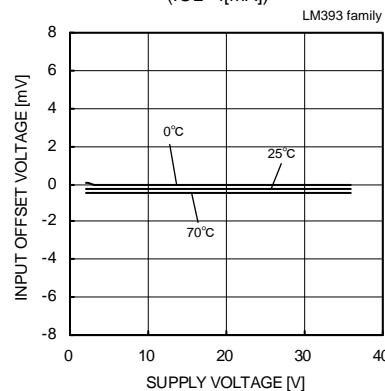


Fig. 8
Input Offset Voltage – Supply Voltage

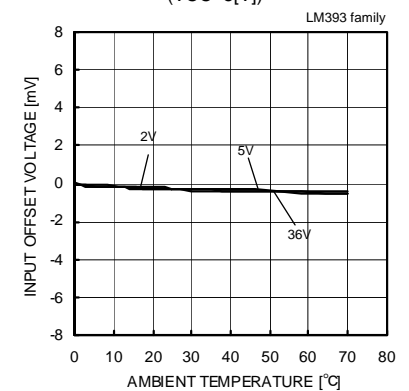


Fig. 9
Input Offset Voltage – Ambient Temperature

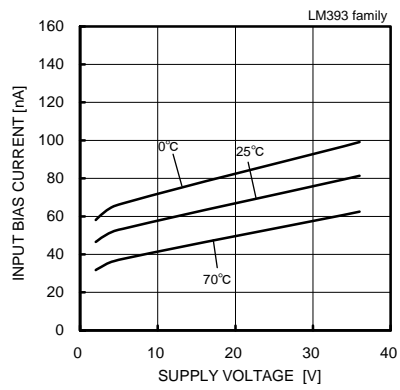


Fig. 10
Input Bias Current – Supply Voltage

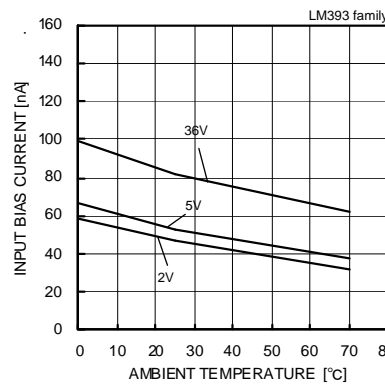


Fig. 11
Input Bias Current – Ambient Temperature

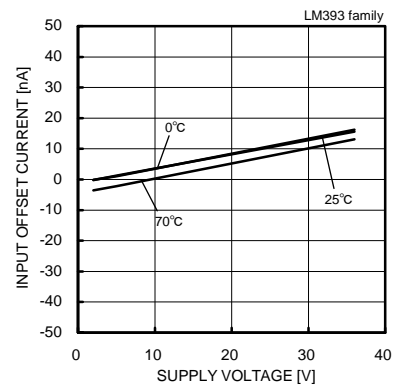


Fig. 12
Input Offset Current – Supply Voltage

(*)The data above is ability value of sample, it is not guaranteed. LM393family:0[°C]~+70[°C]

●Reference Data LM393 family

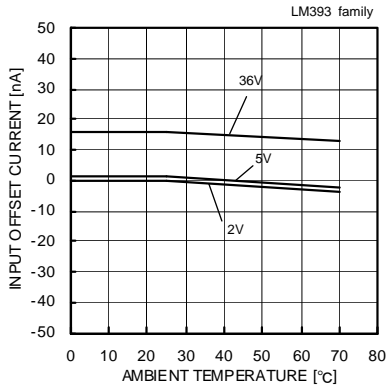


Fig. 13

Input Offset Current – Ambient Temperature

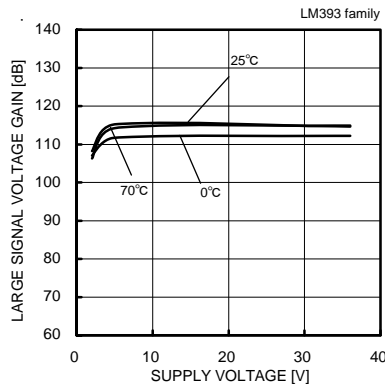


Fig. 14

Large Signal Voltage Gain – Supply Voltage

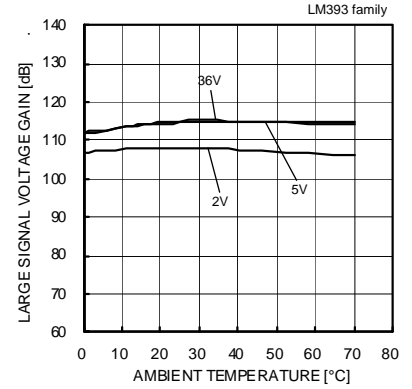


Fig. 15

Large Signal Voltage Gain – Ambient Temperature

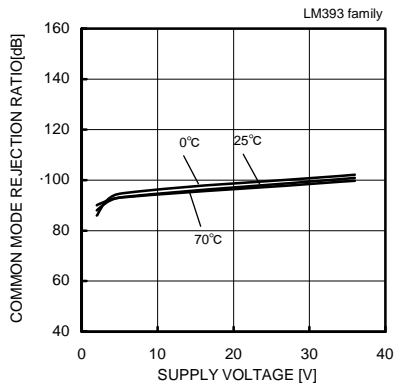


Fig. 16

Common Mode Rejection Ratio – Supply Voltage

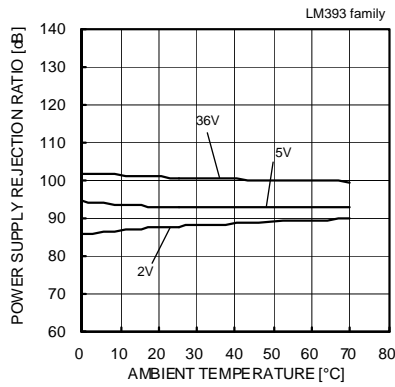


Fig. 17

Common Mode Rejection Ratio – Ambient Temperature

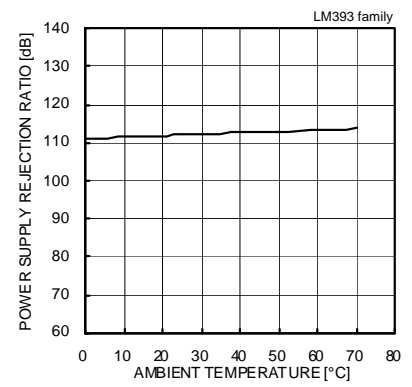


Fig. 18

Power Supply Rejection Ratio – Ambient Temperature

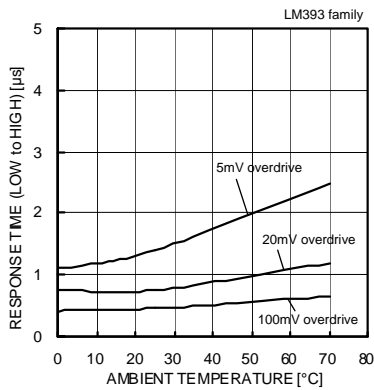


Fig. 19

Response Time (Low to High) – Ambient Temperature
 (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

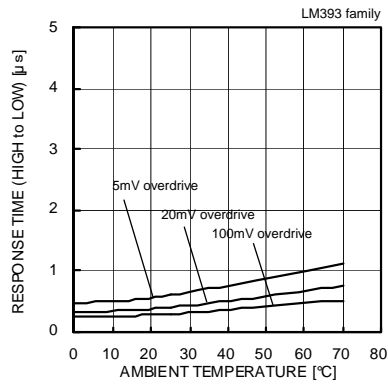


Fig. 20

Response Time (High to Low) – Ambient Temperature
 (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

(*)The data above is ability value of sample, it is not guaranteed. LM393family:0[°C]~+70[°C]

●Reference Data LM339 family

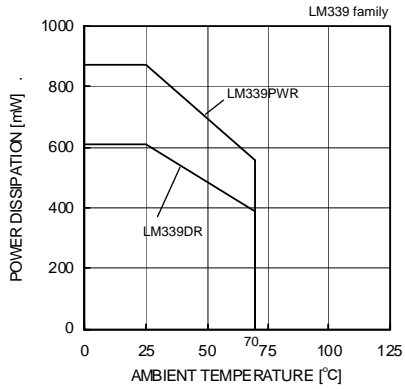


Fig. 21

Derating Curve

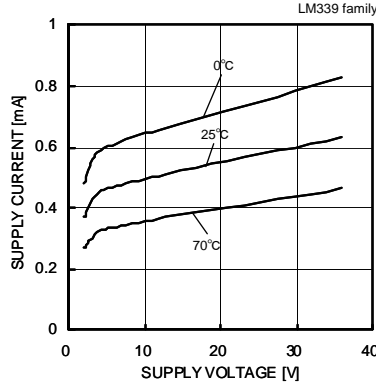


Fig. 22

Supply Current - Supply Voltage

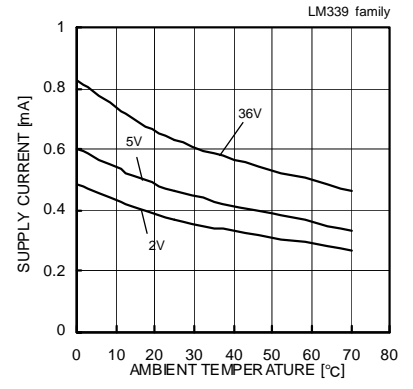


Fig. 23

Supply Current - Ambient Temperature

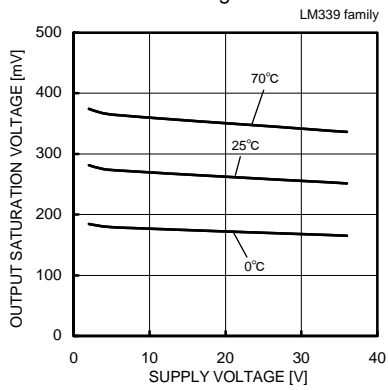


Fig. 24

Output Saturation Voltage - Supply Voltage (IOL=4[mA])

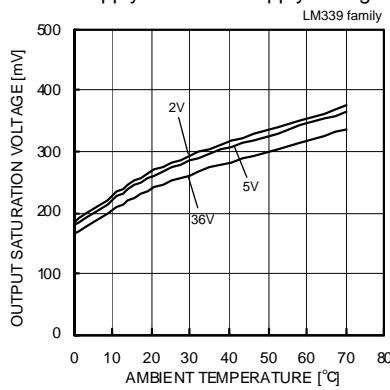


Fig. 25

Output Saturation Voltage - Ambient Temperature (IOL=4[mA])

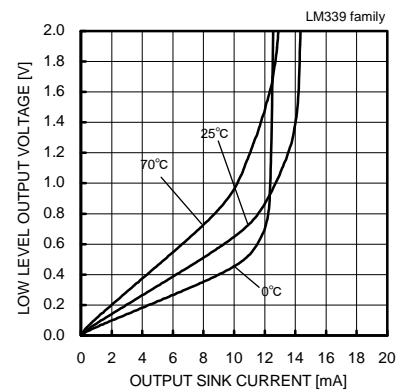


Fig. 26

Low Level Output Voltage - Output Sink Current (VCC=5[V])

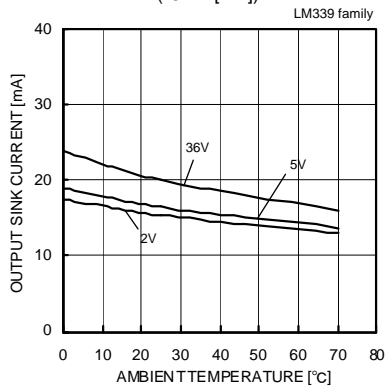


Fig. 27

Output Sink Current - Ambient Temperature (VOUT=1.5[V])

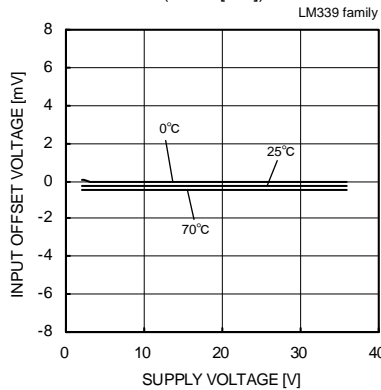


Fig. 28

Input Offset Voltage - Supply Voltage

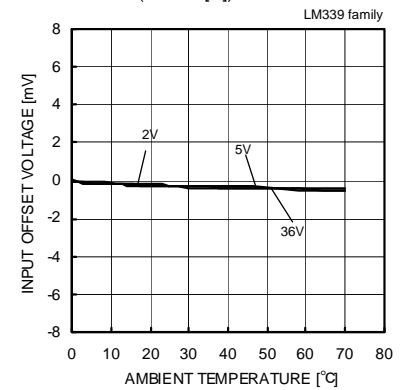


Fig. 29

Input Offset Voltage - Ambient Temperature

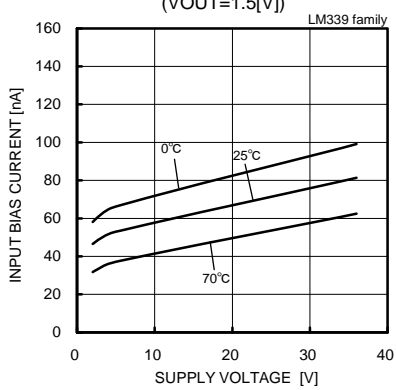


Fig. 30

Input Bias Current - Supply Voltage

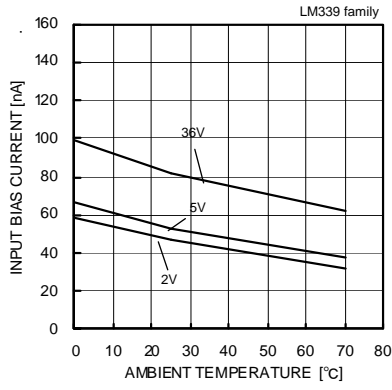


Fig. 31

Input Bias Current - Ambient Temperature

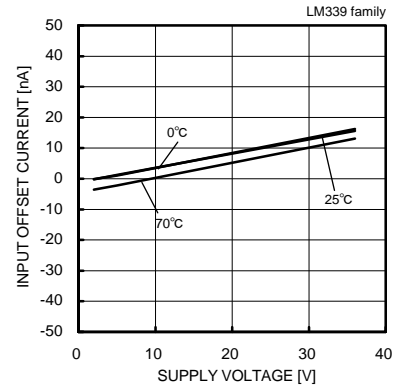


Fig. 32

Input Offset Current - Supply Voltage

(*)The data above is ability value of sample, it is not guaranteed. LM339family:0[°C]~+70[°C]

●Reference Data LM339 family

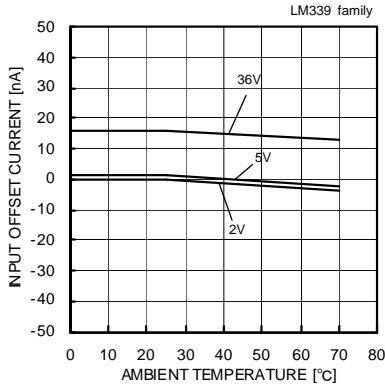


Fig. 33
 Input Offset Current
 – Ambient Temperature

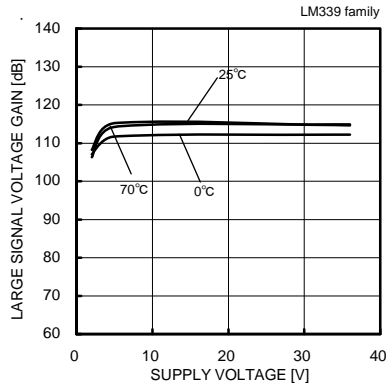


Fig. 34
 Large Signal Voltage Gain
 – Supply Voltage

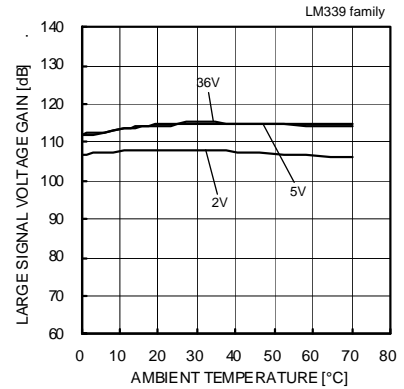


Fig. 35
 Large Signal Voltage Gain
 – Ambient Temperature

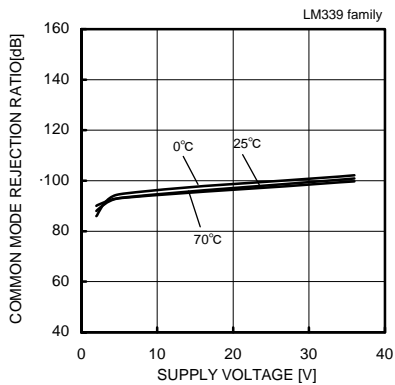


Fig. 36
 Common Mode Rejection Ratio
 – Supply Voltage

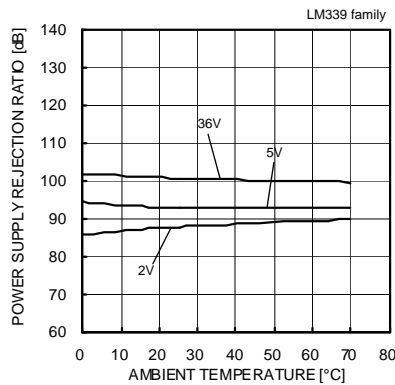


Fig. 37
 Common Mode Rejection Ratio
 – Ambient Temperature

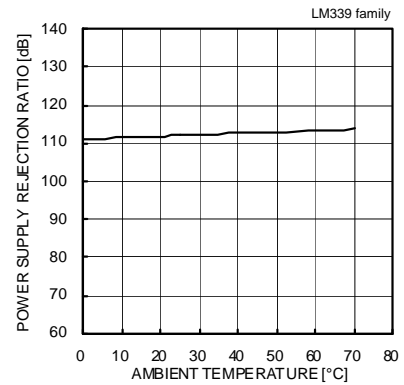


Fig. 38
 Power Supply Rejection Ratio
 – Ambient Temperature

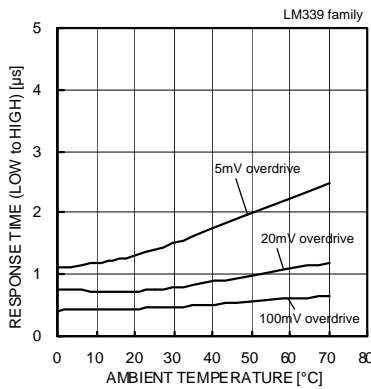


Fig. 39
 Response Time (Low to High)
 – Ambient Temperature
 (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

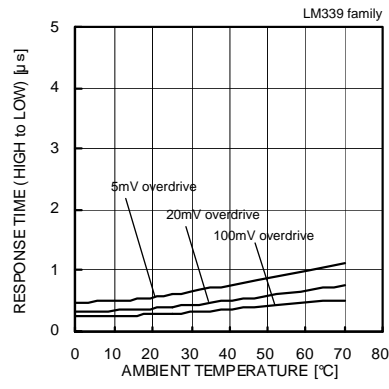


Fig. 40
 Response Time (High to Low)
 – Ambient Temperature
 (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

(*)The data above is ability value of sample, it is not guaranteed. BA10393F:-40[°C]~+70[°C]

●Reference Data LM2903 family

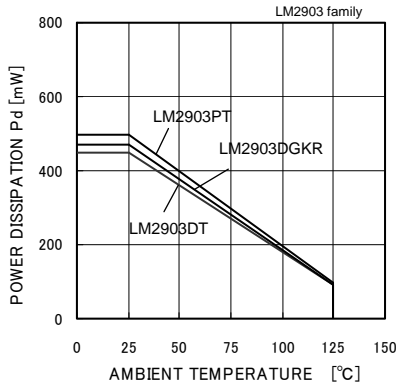


Fig. 41
Derating Curve

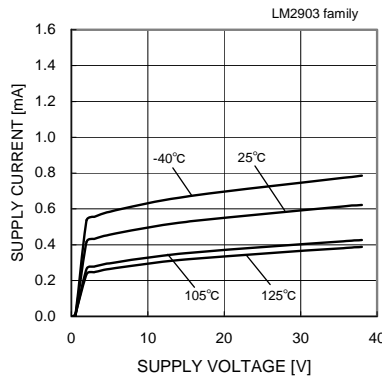


Fig. 42
Supply Current - Supply Voltage

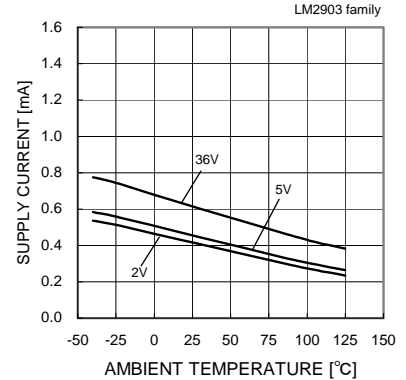


Fig. 43
Supply Current - Ambient Temperature

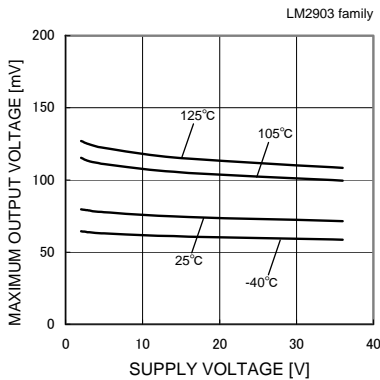


Fig. 44
Output Saturation Voltage - Supply Voltage
(IOL=4[mA])

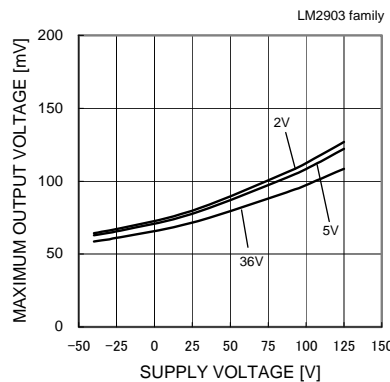


Fig. 45
Output Saturation Voltage - Ambient Temperature
(IOL=4[mA])

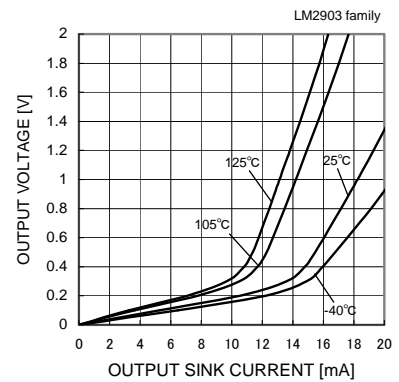


Fig. 46
Low Level Output Voltage - Output Sink Current
(VCC=5[V])

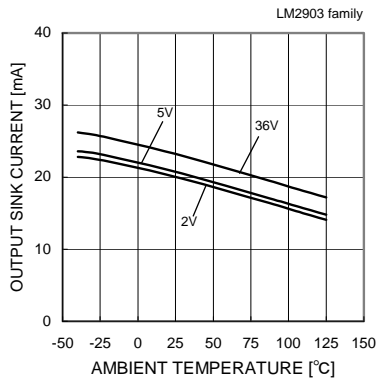


Fig. 47
Output Sink Current - Ambient Temperature
(VOUT=1.5[V])

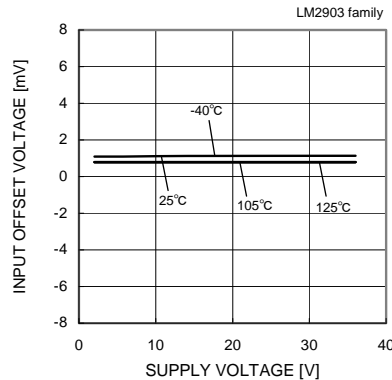


Fig. 48
Input Offset Voltage - Supply Voltage

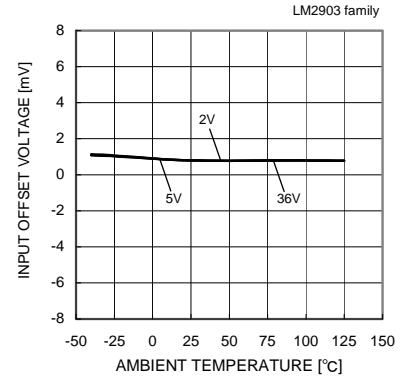


Fig. 49
Input Offset Voltage - Ambient Temperature

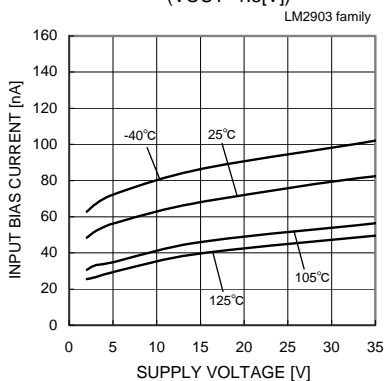


Fig. 50
Input Bias Current - Supply Voltage

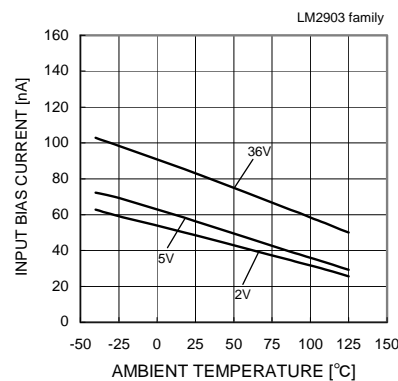


Fig. 51
Input Bias Current - Ambient Temperature

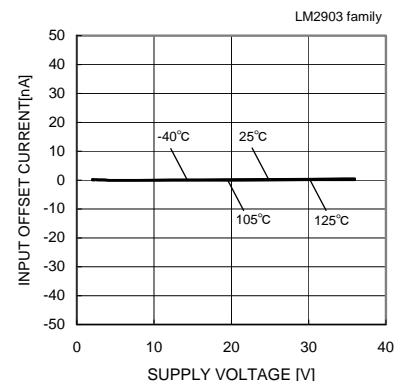


Fig. 52
Input Offset Current - Supply Voltage

(*)The data above is ability value of sample, it is not guaranteed.LM2903family:-40[°C]~+125[°C]

●Reference Data LM2903 family

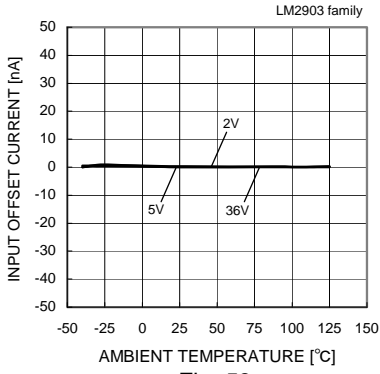


Fig. 53

Input Offset Current – Ambient Temperature

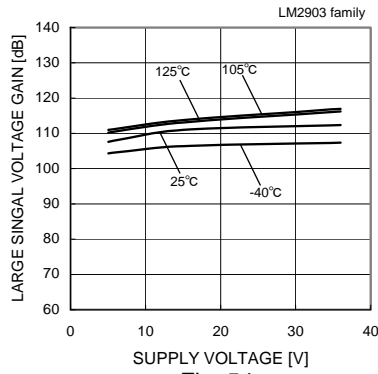


Fig. 54

Large Signal Voltage Gain – Supply Voltage

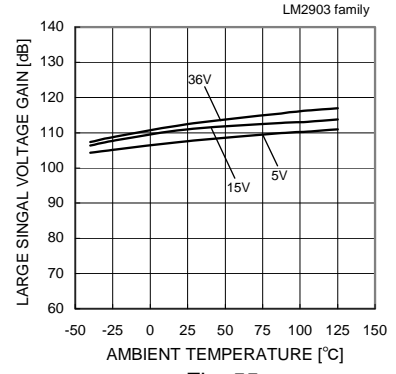


Fig. 55

Large Signal Voltage Gain – Ambient Temperature

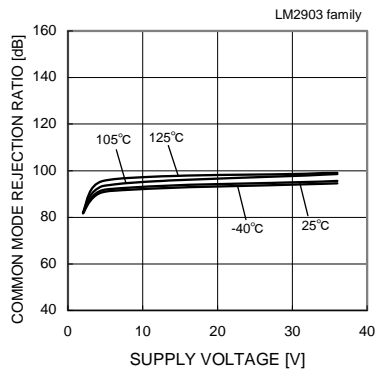


Fig. 56

Common Mode Rejection Ratio – Supply Voltage

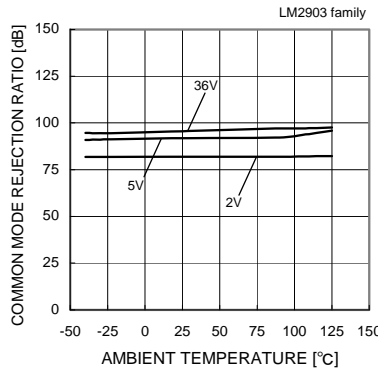


Fig. 57

Common Mode Rejection Ratio – Ambient Temperature

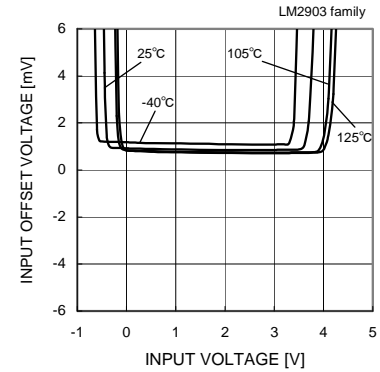


Fig. 58

Input Offset Voltage – Input Voltage (VCC=5V)

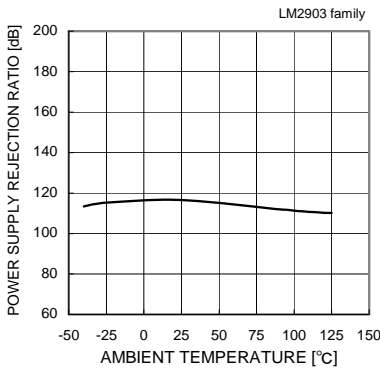


Fig. 59

Power Supply Rejection Ratio – Ambient Temperature

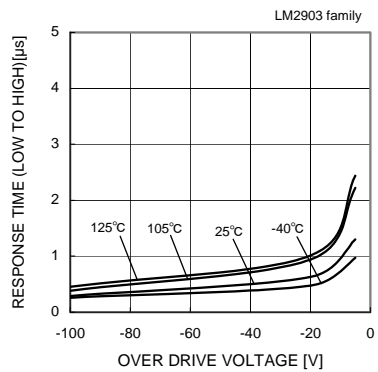


Fig. 60

Response Time (Low to High) – Over Drive Voltage (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

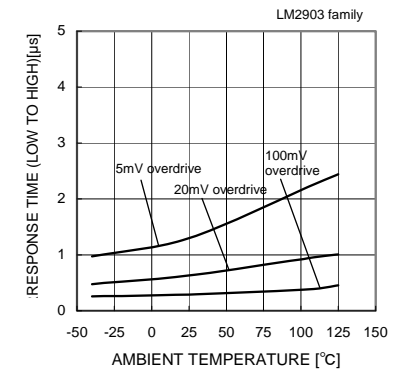


Fig. 61

Response Time (Low to High) – Ambient Temperature (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

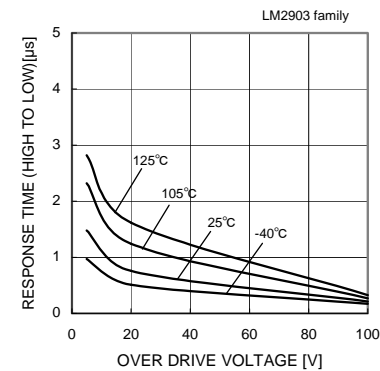


Fig. 62

Response Time (High to Low) – Over Drive Voltage (VCC=5[V], VRL=5[V], RL=5.1[kΩ])













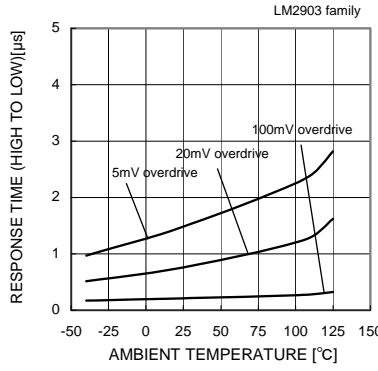


Fig. 63

Response Time (High to Low) – Ambient Temperature (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

(*)The data above is ability value of sample, it is not guaranteed. LM2903family:-40[°C]~+125[°C]

●Reference Data LM2901 family

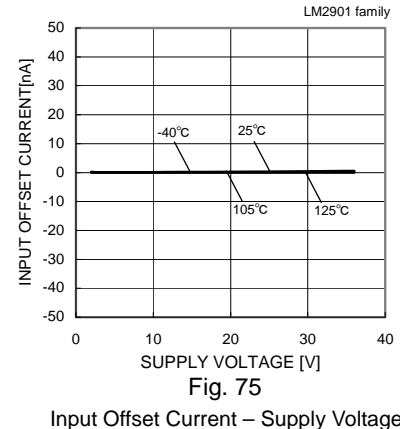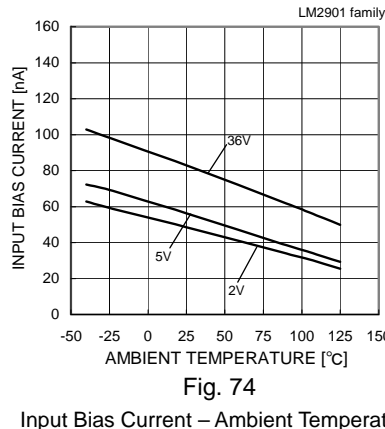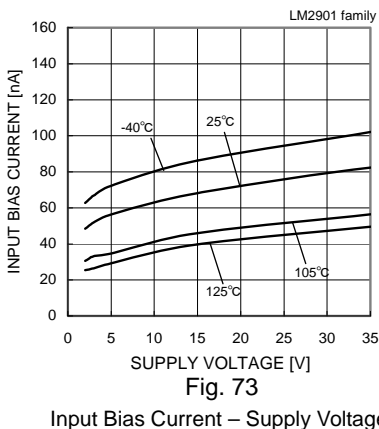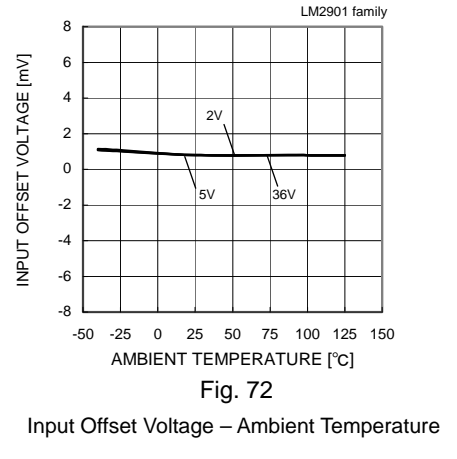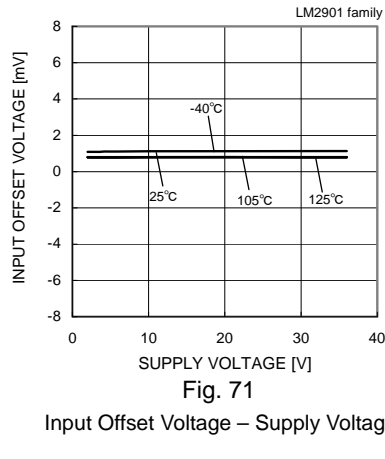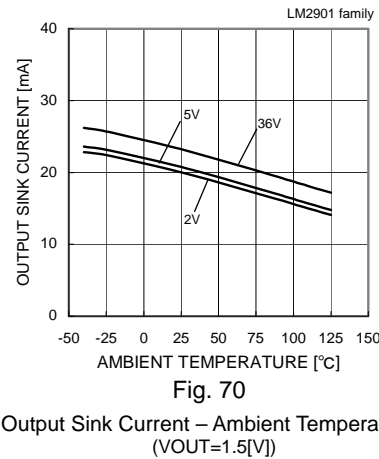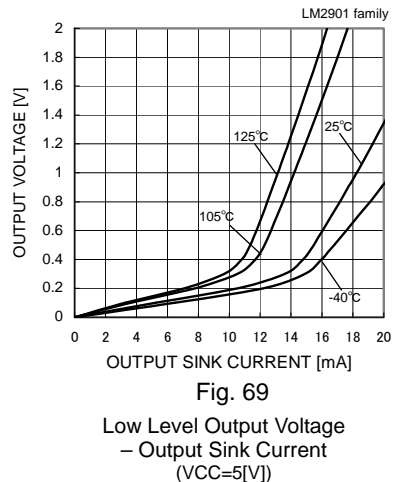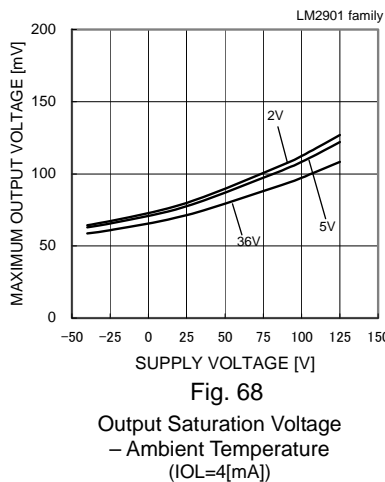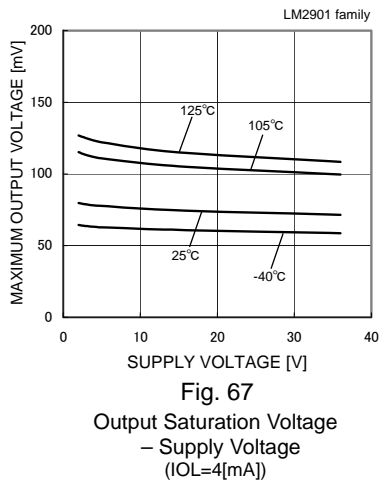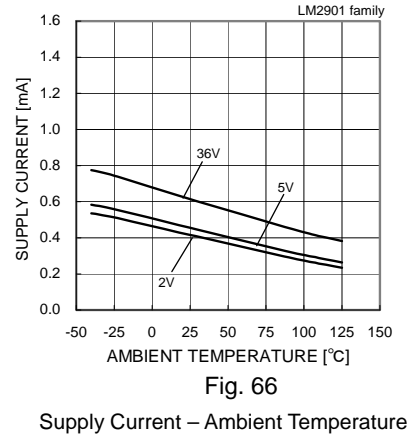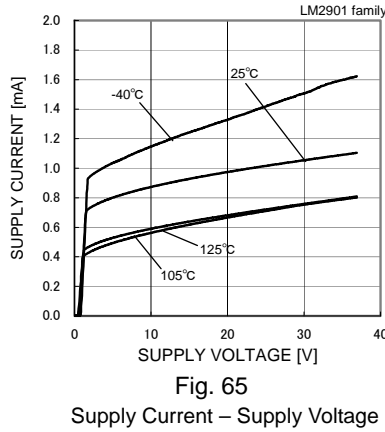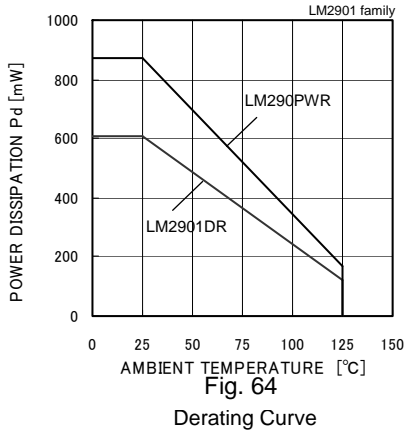

(*)The data above is ability value of sample, it is not guaranteed. LM2901family:-40[°C]~+125[°C]

●Reference Data LM2901 family

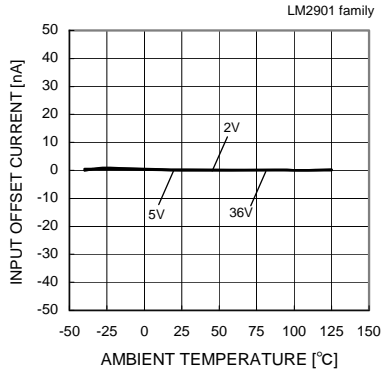


Fig. 76

Input Offset Current – Ambient Temperature

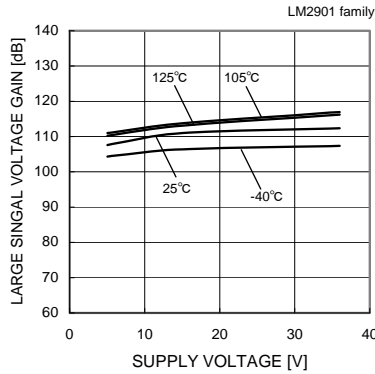


Fig. 77

Large Signal Voltage Gain – Supply Voltage

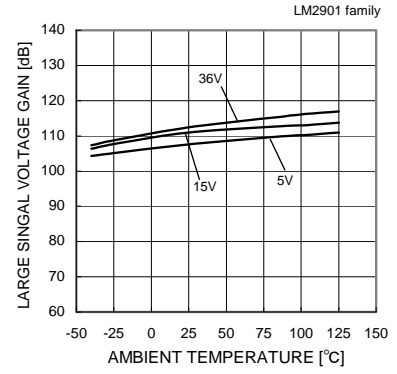


Fig. 78

Large Signal Voltage Gain – Ambient Temperature

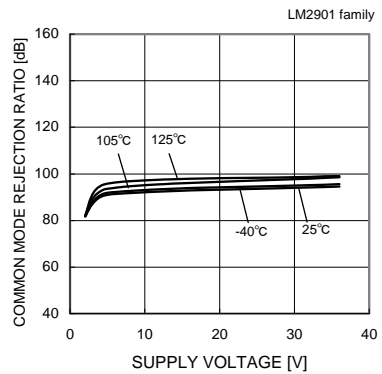


Fig. 79

Common Mode Rejection Ratio – Supply Voltage

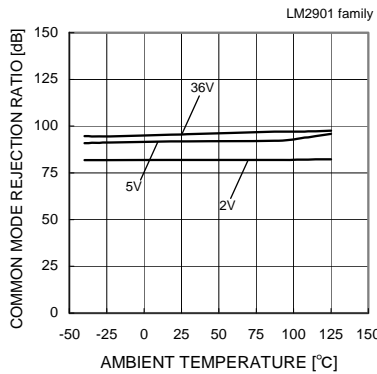


Fig. 80

Common Mode Rejection Ratio – Ambient Temperature

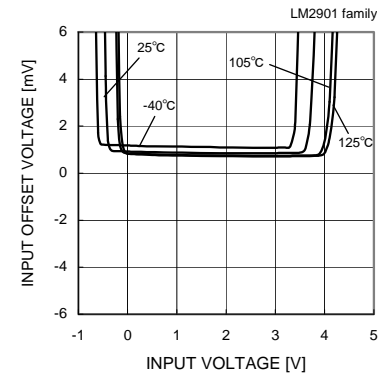


Fig. 81

Input Offset Voltage – Input Voltage (VCC=5V)

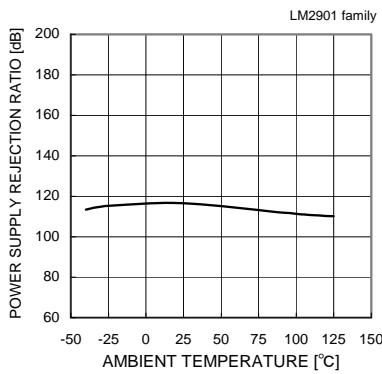


Fig. 82

Power Supply Rejection Ratio – Ambient Temperature

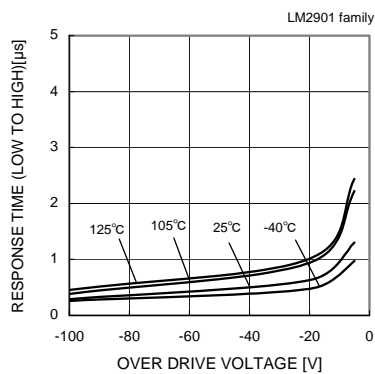


Fig. 83

Response Time (Low to High) – Over Drive Voltage (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

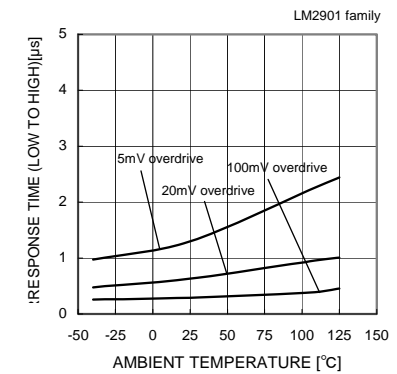


Fig. 84

Response Time (Low to High) – Ambient Temperature (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

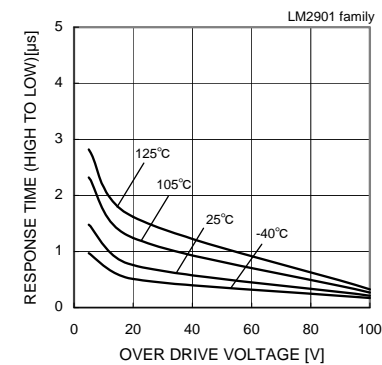


Fig. 85

Response Time (High to Low) – Over Drive Voltage (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

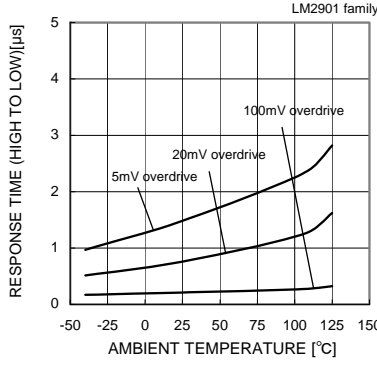


Fig. 86

Response Time (High to Low) – Ambient Temperature (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

(*)The data above is ability value of sample, it is not guaranteed. LM901family: -40[°C]~+125[°C]

● Circuit Diagram

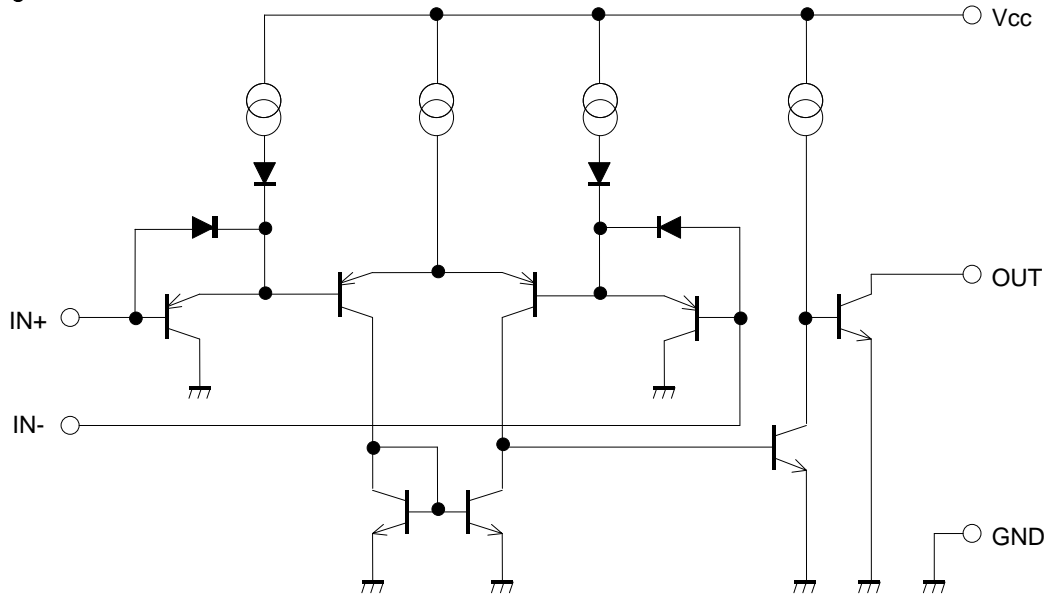


Fig.87 Circuit Diagram (each Comparator)

● Measurement circuit 1 NULL Method measurement condition

Vcc, GND, EK, VICR Unit : [V]

| Parameter | VF | S1 | S2 | S3 | LM393/LM339 family | | | | LM2903/LM2901 family | | | | Calculation |
|---------------------------|-----|-----|-----|----|--------------------|-----|-------|------|----------------------|-----|-------|------|-------------|
| | | | | | Vcc | GND | EK | VICR | Vcc | GND | EK | VICR | |
| Input Offset Voltage | VF1 | ON | ON | ON | 5 to 30 | 0 | -1.4 | 0 | 5 to 30 | 0 | -1.4 | 0 | 1 |
| Input Offset Current | VF2 | OFF | OFF | ON | 5 | 0 | -1.4 | 0 | 5 | 0 | -1.4 | 0 | 2 |
| Input Bias Current | VF3 | OFF | ON | ON | 5 | 0 | -1.4 | 0 | 5 | 0 | -1.4 | 0 | 3 |
| | VF4 | ON | OFF | | 5 | 0 | -1.4 | 0 | 5 | 0 | -1.4 | 0 | |
| Large Signal Voltage Gain | VF5 | ON | ON | ON | 15 | 0 | -1.4 | 0 | 15 | 0 | -1.4 | 0 | 4 |
| | VF6 | | | | 15 | 0 | -11.4 | 0 | 15 | 0 | -11.4 | 0 | |

— Calculation —

1. Input offset voltage (VIO)

$$V_{io} = \frac{|VF1|}{1 + R_f/R_s} \text{ [V]}$$

2. Input offset current (IIO)

$$I_{io} = \frac{|VF2 - VF1|}{R_i(1 + R_f/R_s)} \text{ [A]}$$

3. Input bias current (IIB)

$$I_b = \frac{|VF4 - VF3|}{2 \times R_i(1 + R_f/R_s)} \text{ [A]}$$

4. Large signal differential voltage gain (AVD)

$$A_V = 20 \times \text{Log} \frac{10 \times (1 + R_f/R_s)}{|VF6 - VF5|} \text{ [dB]}$$

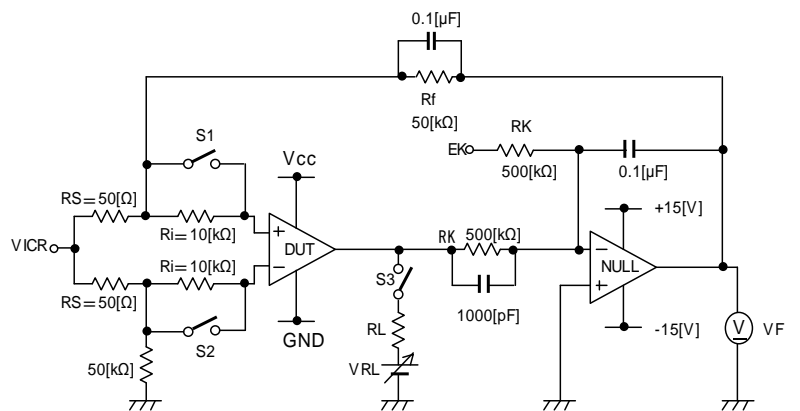


Fig.88 Measurement Circuit1 (each Comparator)

● Measurement Circuit2 Switch Condition

| SW No. | | SW 1 | SW 2 | SW 3 | SW 4 | SW 5 | SW 6 | SW 7 |
|---------------------------|------------|------|------|------|------|------|------|------|
| Supply Current | — | OFF | OFF | OFF | OFF | OFF | OFF | OFF |
| Low Level Output Current | VOL=1.5[V] | OFF | ON | ON | OFF | ON | ON | OFF |
| Low Level Output Current | IOL=4[mA] | OFF | ON | ON | OFF | OFF | OFF | ON |
| High Level Output Current | VOH=36[V] | OFF | ON | ON | OFF | OFF | OFF | ON |
| Response Time | RL=5.1[kΩ] | ON | OFF | ON | ON | OFF | ON | OFF |
| | VRL=5[V] | | | | | | | |

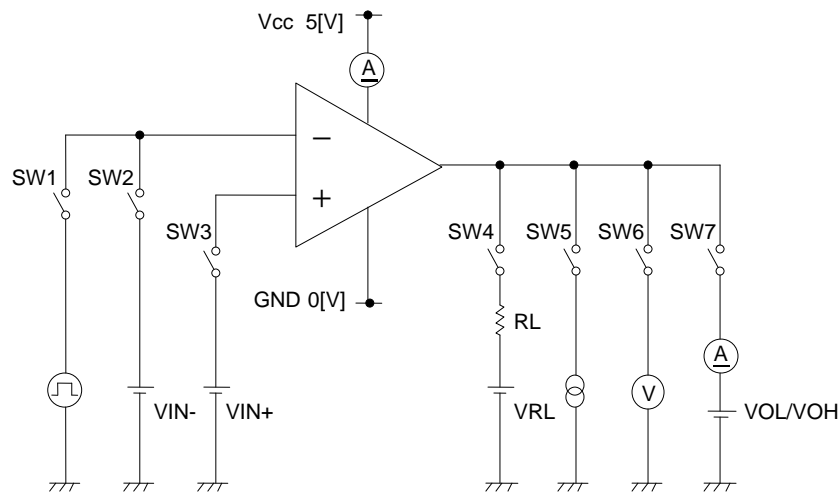


Fig.89 Measurement Circuit2 (each channel)

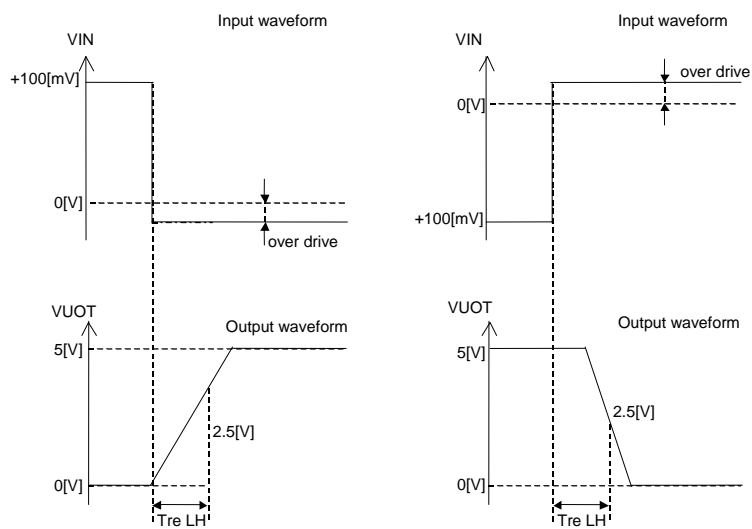


Fig.90 Response Time

● Description of Electrical Characteristics

Described below are descriptions of the relevant electrical terms.

Please note that item names, symbols, and their meanings may differ from those on another manufacturer's documents.

1. Absolute maximum ratings

The absolute maximum ratings are values that should never be exceeded, since doing so may result in deterioration of electrical characteristics or damage to the part itself as well as peripheral components.

1.1 Power supply voltage (V_{CC}/GND)

Expresses the maximum voltage that can be supplied between the positive and negative power supply terminals without causing deterioration of the electrical characteristics or destruction of the internal circuitry.

1.2 Differential input voltage (VID)

Indicates the maximum voltage that can be supplied between the non-inverting and inverting terminals without damaging the IC.

1.3 Input common-mode voltage range (VICR)

Signifies the maximum voltage that can be supplied to non-inverting and inverting terminals without causing deterioration of the electrical characteristics or damage to the IC itself. Normal operation is not guaranteed within the input common-mode voltage range of the maximum ratings – use within the input common-mode voltage range of the electric characteristics instead.

1.4 Operating temperature range and storage temperature range (T_{opr}, T_{stg})

The operating temperature range indicates the temperature range within which the IC can operate. The higher the ambient temperature, the lower the power consumption of the IC. The storage temperature range denotes the range of temperatures the IC can be stored under without causing excessive deterioration of the electrical characteristics.

1.5 Power dissipation (P_d)

Indicates the power that can be consumed by a particular mounted board at ambient temperature (25°C). For packaged products, P_d is determined by maximum junction temperature and the thermal resistance.

2. Electrical characteristics**2.1 Input offset voltage (V_{IO})**

Signifies the voltage difference between the non-inverting and inverting terminals. It can be thought of as the input voltage difference required for setting the output voltage to 0V.

2.2 Input offset current (I_{IO})

Indicates the difference of the input bias current between the non-inverting and inverting terminals.

2.3 Input bias current (I_{IB})

Denotes the current that flows into or out of the input terminal, it is defined by the average of the input bias current at the non-inverting terminal and the input bias current at the inverting terminal.

2.4 Input common-mode voltage range (VICR)

Indicates the input voltage range under which the IC operates normally.

2.5 Large signal differential voltage gain (A_{VD})

The amplifying rate (gain) of the output voltage against the voltage difference between the non-inverting and inverting terminals, it is (normally) the amplifying rate (gain) with respect to DC voltage.

$A_{VD} = (\text{output voltage fluctuation}) / (\text{input offset fluctuation})$

2.6 Supply current (I_{CC})

Indicates the current of the IC itself that flows under specific conditions and during no-load steady state.

2.7 Low level output current (I_{OL})

Denotes the maximum current that can be output under specific output conditions.

2.8 Low level output voltage (V_{OL})

Signifies the voltage range that can be output under specific output conditions.

2.9 High level output current (I_{OH})

Indicates the current that flows into the IC under specific input and output conditions.

2.10 Response time (t_{re})

The interval between the application of input and output conditions.

2.11 Common-mode rejection ratio (CMRR)

Denotes the ratio of fluctuation of the input offset voltage when the in-phase input voltage is changed (DC fluctuation).


$CMRR = (\text{change of input common-mode voltage}) / (\text{input offset fluctuation})$

2.12 Power supply rejection ratio (PSRR)


Signifies the ratio of fluctuation of the input offset voltage when the supply voltage is changed (DC fluctuation).

$PSRR = (\text{change in power supply voltage}) / (\text{input offset fluctuation})$

● Derating Curves

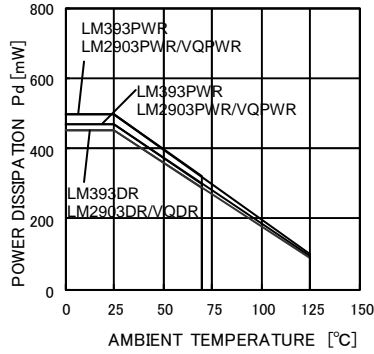

LM393DR/PWR/DGKR
 LM2903DR/PWR/DGKR/VQDR/VQPWR

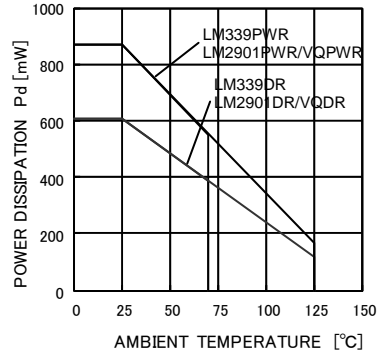

LM339DR/PWR
 LM2901DR/PWR/VQDR/VQPWR

Power Dissipation

| Package | Pd[W] | θ_{ja} [°C/W] |
|-------------------|-------|----------------------|
| SOIC8 (*8) | 450 | 3.6 |
| TSSOP8 (*6) | 500 | 4.0 |
| MSOP8/VSSOP8 (*7) | 470 | 3.76 |

$\theta_{ja} = (T_j - T_a) / P_d [°C/W]$

Power Dissipation

| Package | Pd[W] | θ_{ja} [°C/W] |
|---------|-------|----------------------|
| SOIC14 | 610 | 4.9 |
| TSSOP14 | 870 | 7.0 |

$\theta_{ja} = (T_j - T_a) / P_d [°C/W]$

Fig.91 Derating Curves

● Precautions

- Unused circuits
 When there are unused circuits it is recommended that they be connected as in Fig.92, setting the non-inverting input terminal to a potential within the in-phase input voltage range (VICR).
- Input terminal voltage
 Applying GND + 36V to the input terminal is possible without causing deterioration of the electrical characteristics or destruction, irrespective of the supply voltage. However, this does not ensure normal circuit operation.
 Please note that the circuit operates normally only when the input voltage is within the common mode input voltage range of the electric characteristics.
- Power supply (single / dual)
 The op-amp operates when the specified voltage supplied is between Vcc and GND. Therefore, the single supply op-amp can be used as a dual supply op-amp as well.
- Power dissipation Pd
 Using the unit in excess of the rated power dissipation may cause deterioration in electrical characteristics due to a rise in chip temperature, including reduced current capability. Therefore, please take into consideration the power dissipation (Pd) under actual operating conditions and apply a sufficient margin in thermal design. Refer to the thermal derating curves for more information.
- Short-circuit between pins and erroneous mounting
 Incorrect mounting may damage the IC. In addition, the presence of foreign particles between the outputs, the output and the power supply, or the output and GND may result in IC destruction.
- Terminal short-circuits
 When the output and Vcc terminals are shorted, excessive output current may flow, resulting in undue heat generation and, subsequently, destruction.
- Operation in a strong electromagnetic field
 Operation in a strong electromagnetic field may cause malfunctions.
- Radiation
 This IC is not designed to withstand radiation.
- IC handling
 Applying mechanical stress to the IC by deflecting or bending the board may cause fluctuations in the electrical characteristics due to piezoelectric (piezo) effects.
- Board inspection
 Connecting a capacitor to a pin with low impedance may stress the IC. Therefore, discharging the capacitor after every process is recommended. In addition, when attaching and detaching the jig during the inspection phase, ensure that the power is turned OFF before inspection and removal. Furthermore, please take measures against ESD in the assembly process as well as during transportation and storage.




Fig.92 Disable circuit example

● Ordering part number

| | | | | | |
|---|---|---|---|---|---|
| L | M | 2 | 9 | 0 | 3 |
|---|---|---|---|---|---|

| | |
|---|---|
| V | Q |
|---|---|

| |
|---|
| D |
|---|

| |
|---|
| R |
|---|

Family name

LM393
 LM339
 LM2901
 LM2903

Operating Voltage

VQ : Tested to 32V
 None : Tested to 30V


Package type

D : SOIC
 PW : TSSOP
 DGK : MSOP/VSSOP

Packaging and forming specification


R: Embossed tape and reel

SOIC8

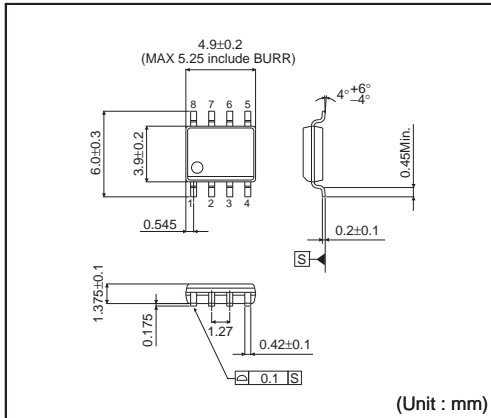


<Tape and Reel information>

| | |
|-------------------|---|
| Tape | Embossed carrier tape |
| Quantity | 2500pcs |
| Direction of feed | (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

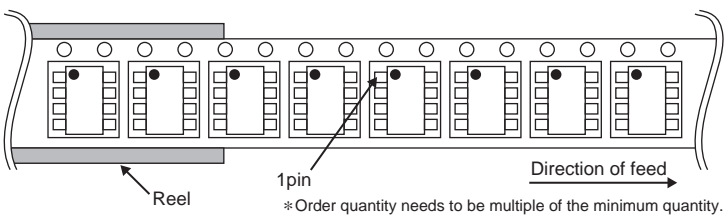


SOIC14

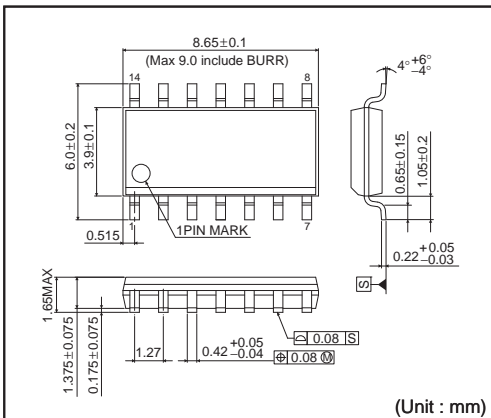


<Tape and Reel information>

| | |
|-------------------|---|
| Tape | Embossed carrier tape |
| Quantity | 2500pcs |
| Direction of feed | (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

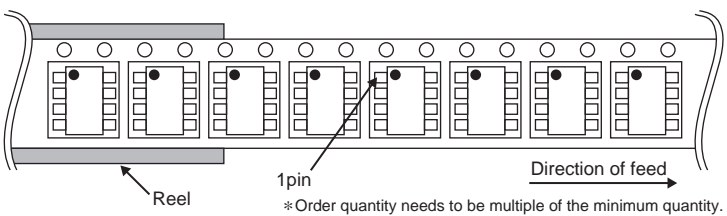


TSSOP8


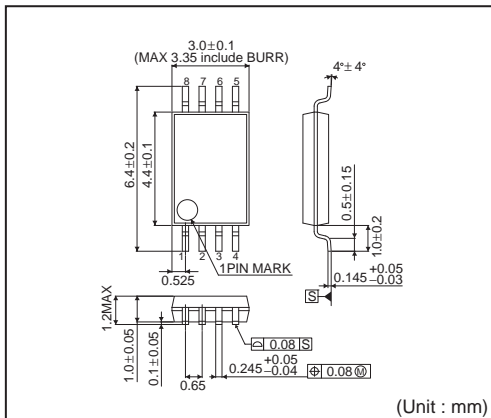


<Tape and Reel information>



| | |
|-------------------|---|
| Tape | Embossed carrier tape |
| Quantity | 2500pcs |
| Direction of feed | (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

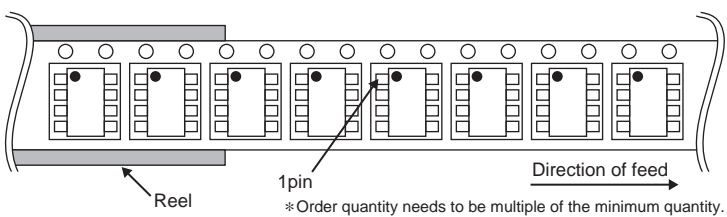

TSSOP14

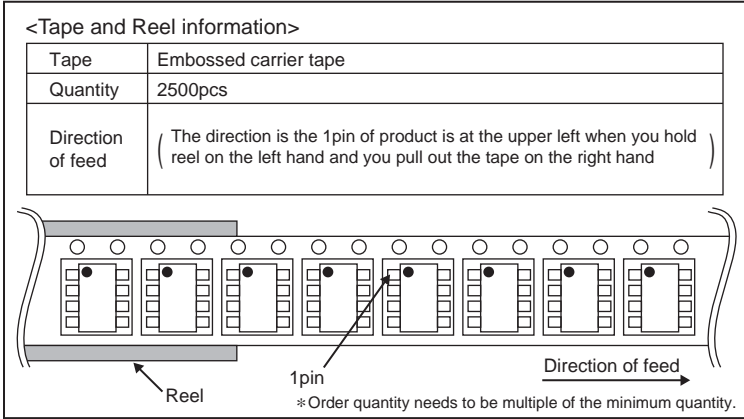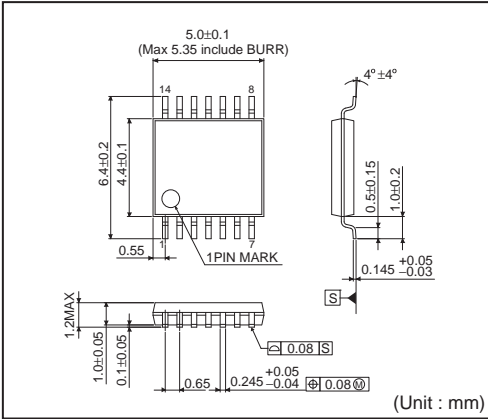

MSOP / VSSOP8

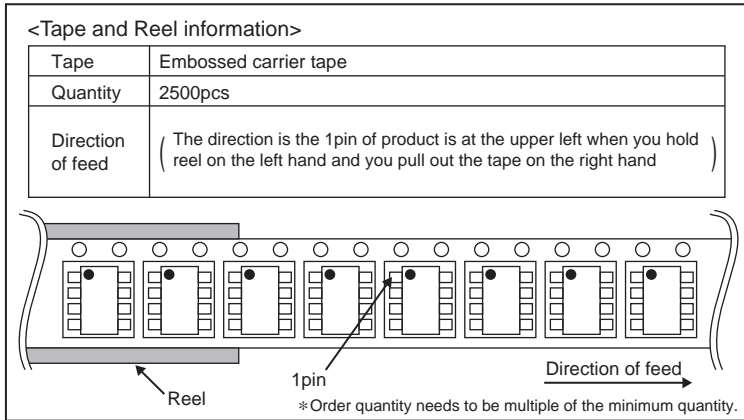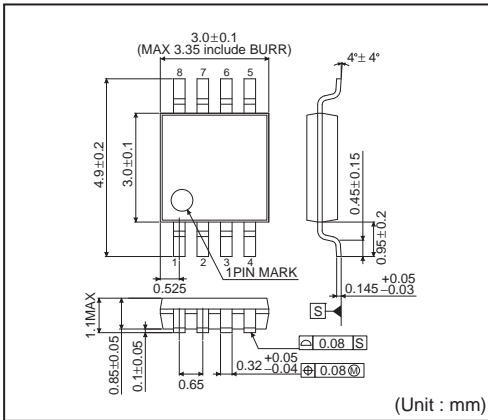

Notice

Precaution on using ROHM Products

- Our Products are designed and manufactured for application in ordinary electronic equipments (such as AV equipment, OA equipment, telecommunication equipment, home electronic appliances, amusement equipment, etc.). If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment ^(Note 1), transport equipment, traffic equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

| JAPAN | USA | EU | CHINA |
|-----------|-----------|------------|-----------|
| CLASS III | CLASS III | CLASS II b | CLASS III |
| CLASS IV | | CLASS III | |

- ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
 - Installation of protection circuits or other protective devices to improve system safety
 - Installation of redundant circuits to reduce the impact of single or multiple circuit failure
- Our Products are designed and manufactured for use under standard conditions and not under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc. prior to use, must be necessary:
 - Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
 - Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
 - Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
 - Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
 - Sealing or coating our Products with resin or other coating materials
 - Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
 - Use of the Products in places subject to dew condensation
- The Products are not subject to radiation-proof design.
- Please verify and confirm characteristics of the final or mounted products in using the Products.
- In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse. is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- De-rate Power Dissipation (Pd) depending on Ambient temperature (Ta). When used in sealed area, confirm the actual ambient temperature.
- Confirm that operation temperature is within the specified range described in the product specification.
- ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

Precaution for Mounting / Circuit board design

- When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
- In principle, the reflow soldering method must be used; if flow soldering method is preferred, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

Precautions Regarding Application Examples and External Circuits

1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of ionizer, friction prevention and temperature / humidity control).

Precaution for Storage / Transportation

1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
 - [a] the Products are exposed to sea winds or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [b] the temperature or humidity exceeds those recommended by ROHM
 - [c] the Products are exposed to direct sunshine or condensation
 - [d] the Products are exposed to high Electrostatic
2. Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.
3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

Precaution for Product Label

QR code printed on ROHM Products label is for ROHM's internal use only.

Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

Precaution for Foreign Exchange and Foreign Trade act

Since our Products might fall under controlled goods prescribed by the applicable foreign exchange and foreign trade act, please consult with ROHM representative in case of export.

Precaution Regarding Intellectual Property Rights

1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data. ROHM shall not be in any way responsible or liable for infringement of any intellectual property rights or other damages arising from use of such information or data.:
2. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the information contained in this document.

Other Precaution

1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
3. In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

General Precaution

1. Before you use our Products, you are requested to carefully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any ROHM's Products against warning, caution or note contained in this document.
2. All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sales representative.
3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate and/or error-free. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ROHM Semiconductor:](#)

[LM339PWR](#) [LM2903VQPWR](#) [LM393PWR](#) [LM393DGKR](#)