

TC4584BP/BF


C²MOS DIGITAL INTEGRATED CIRCUIT
SILICON MONOLITHIC

TC4584BP/TC4584BF HEX SCHMITT TRIGGER

The TC4584BP/BF is the 6-circuit inverter having the Schmitt trigger function at the input terminal.

That is, since the circuit threshold level voltages at the leading and trailing edges of input waveform are different (V_P , V_N), the TC4584BP/BF can be used in the broad range application including line receiver, waveform shaping circuit, astable multivibrator, monostable multivibrator, etc. in addition to ordinary inverter.


Since the pins are compatible with the TC4069UB, the substitution is also possible.




ABSOLUTE MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	RATING	UNIT
DC Supply Voltage	V_{DD}	$V_{SS} - 0.5 \sim V_{SS} + 20$	V
Input Voltage	V_{IN}	$V_{SS} - 0.5 \sim V_{DD} + 0.5$	V
Output Voltage	V_{OUT}	$V_{SS} - 0.5 \sim V_{DD} + 0.5$	V
DC Input Current	I_{IN}	+10	mA
Power Dissipation	PD	300 (DIP) / 180 (MFP)	mW
Operating Temperature Range	T_A	-40 ~ 85	°C
Storage Temperature Range	T_{stg}	-65 ~ 150	°C
Lead Temp./Time	T_{sol}	260°C • 10 sec	


PIN ASSIGNMENT



INPUT/OUTPUT VOLTAGE CHARACTERISTIC

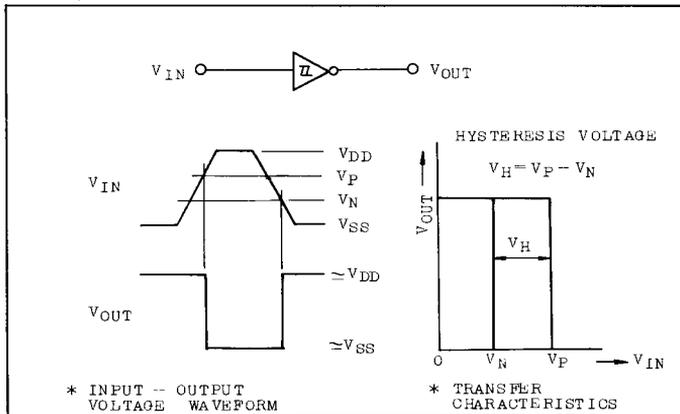

LOGIC DIAGRAM



RECOMMENDED OPERATING CONDITIONS (V_{SS}=0V)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNITS
DC Supply Voltage	V _{DD}	3	-	18	V
Input Voltage	V _{IN}	0	-	V _{DD}	V

STATIC ELECTRICAL CHARACTERISTICS (V_{SS}=0V)

CHARACTERISTIC	SYMBOL	TEST CONDITION	V _{DD} (V)	-40°C		25°C			85°C		UNITS	
				MIN.	MAX.	MIN.	TYP.	MAX.	MIN.	MAX.		
High-Level Output Voltage	V _{OH}	I _{OUT} < 1μA V _{IN} =V _{SS} , V _{DD}	5	4.95	-	4.95	5.00	-	4.95	-	V	
			10	9.95	-	9.95	10.00	-	9.95	-		
			15	14.95	-	14.95	15.00	-	14.95	-		
Low-Level Output Voltage	V _{OL}	I _{OUT} < 1μA V _{IN} =V _{SS} , V _{DD}	5	-	0.05	-	0.00	0.05	-	0.05	V	
			10	-	0.05	-	0.00	0.05	-	0.05		
			15	-	0.05	-	0.00	0.05	-	0.05		
Output High Current	I _{OH}	V _{OH} =4.6V V _{OH} =2.5V V _{OH} =9.5V V _{OH} =13.5V V _{IN} =V _{SS} , V _{DD}	5	-0.61	-	-0.51	-1.0	-	-0.42	-	mA	
			5	-2.5	-	-2.1	-4.0	-	-1.7	-		
			10	-1.5	-	-1.3	-2.2	-	-1.1	-		
			15	-4.0	-	-3.4	-9.0	-	-2.8	-		
Output Low Current	I _{OL}	V _{OL} =0.4V V _{OL} =0.5V V _{OL} =1.5V V _{IN} =V _{SS} , V _{DD}	5	0.61	-	0.51	1.5	-	0.42	-	mA	
			10	1.5	-	1.3	3.8	-	1.1	-		
			15	4.0	-	3.4	15.0	-	2.8	-		
Positive Trigger Threshold Voltage	V _P	V _{OUT} =0.5V V _{OUT} =1.0V V _{OUT} =1.5V	5	2.05	3.75	2.15	3.0	3.75	2.15	3.85	V	
			10	4.8	7.6	4.9	6.4	7.6	4.9	7.7		
			15	7.8	11.6	7.9	9.9	11.6	7.9	11.7		
Negative Trigger Threshold Voltage	V _N	V _{OUT} =4.5V V _{OUT} =9.0V V _{OUT} =13.5V	5	1.25	2.95	1.25	2.3	2.85	1.15	2.85	V	
			10	2.4	5.2	2.4	3.8	5.1	2.3	5.1		
			15	3.4	7.2	3.4	5.2	7.1	3.3	7.1		
Hysteresis Voltage	V _H		5	0.10	1.25	0.25	0.65	1.25	0.25	1.40	V	
			10	1.8	3.5	1.9	2.6	3.5	1.9	3.6		
			15	3.7	5.6	3.8	4.7	5.6	3.8	5.7		
Input Current	"H" Level	I _{IH}	V _{IH} =18V	18	-	0.1	-	10 ⁻⁵	0.1	-	1.0	μA
	"L" Level	I _{IL}	V _{IL} =0V	18	-	-0.1	-	-10 ⁻⁵	-0.1	-	-1.0	
Quiescent Device Current	I _{DD}	V _{IN} =V _{SS} , V _{DD} *	5	-	1	-	0.001	1	-	7.5	μA	
			10	-	2	-	0.002	2	-	15		
			15	-	4	-	0.004	4	-	30		

* All valid input combinations.

TC4584BP/BF

DYNAMIC ELECTRICAL CHARACTERISTICS (Ta=25°C, VSS=0V, CL=50pF)

CHARACTERISTIC	SYMBOL	TEST CONDITION	VDD(V)	MIN.	TYP.	MAX.	UNITS
Output Transition Time (Low to High)	t _{TLH}		5	-	80	200	ns
			10	-	50	100	
			15	-	40	80	
Output Transition Time (High to Low)	t _{THL}		5	-	80	200	
			10	-	50	100	
			15	-	40	80	
Propagation Delay Time	t _{pLH} t _{pHL}		5	-	170	340	
			10	-	80	160	
			15	-	60	120	
Input Capacitance	C _{IN}			-	5	7.5	pF

CIRCUIT AND WAVEFORM FOR MEASUREMENT OF DYNAMIC CHARACTERISTICS

