

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.


PRODUCT NUMBER  
5 4 1 0 1 - X X X - X X - X X X X

PLATING  
S= 15μ"[0.38μm]GOLD ON CONTACT AREA  
150μ"[3.81μm]TIN/LEAD ON TAIL  
G= 30μ"[0.76μm]GOLD ON CONTACT AREA  
150μ"[3.81μm]TIN/LEAD ON TAIL  
T= 150μ"[3.81μm]TIN/LEAD ON CONTACT AREA AND ON TAIL  
F= 2μ"[0.05μm]GOLD ON CONTACT AREA & ON TAIL



RETENTION  
R=RETENTIVE LEG NOTE 5 & 7  
POLARIZATION NOTE 7 & 9

POSITIONS PER ROW 01 TO 36 NOTE 10  
POSITIONS PER REEL 00=36,000 (BERGSTRIIP) PIN STYLES 5, 6, 8, 10, 30, 32 ONLY.

PIN STYLE	POST	TAIL	OAL
05	0.230/5.84	0.095/2.41	0.425/10.80
06	0.230/5.84	0.110/2.79	0.440/11.18
08	0.230/5.84	0.120/3.05	0.450/11.43
10	0.230/5.84	0.150/3.81	0.480/12.19
12	0.230/5.84	0.300/7.62	0.630/16.00
14	0.230/5.84	0.400/10.16	0.730/18.54
16	0.230/5.84	0.500/12.70	0.830/21.08
18	0.230/5.84	0.600/15.24	0.930/23.62
20	0.230/5.84	0.700/17.78	1.030/26.16
22	0.230/5.84	0.800/20.32	1.130/28.70
24	0.230/5.84	0.900/22.86	1.230/31.24
26	0.230/5.84	1.000/25.40	1.330/33.78
30	0.318/8.08	0.120/3.05	0.538/13.67
32	0.318/8.08	0.150/3.81	0.568/14.43
34	0.318/8.08	0.212/5.38	0.630/16.00
36	0.318/8.08	0.312/7.92	0.730/18.54
38	0.318/8.08	0.712/18.08	1.130/28.70
40	0.318/8.08	0.912/23.16	1.330/33.78
42	0.520/13.21	0.110/2.79	0.730/18.54
44	0.620/15.75	0.110/2.79	0.830/21.08
46	0.720/18.28	0.110/2.79	0.930/23.62
48	0.820/20.83	0.110/2.79	1.030/26.16
50	1.020/25.91	0.110/2.79	1.230/31.24
52	0.380/9.65	0.150/3.81	0.630/16.00

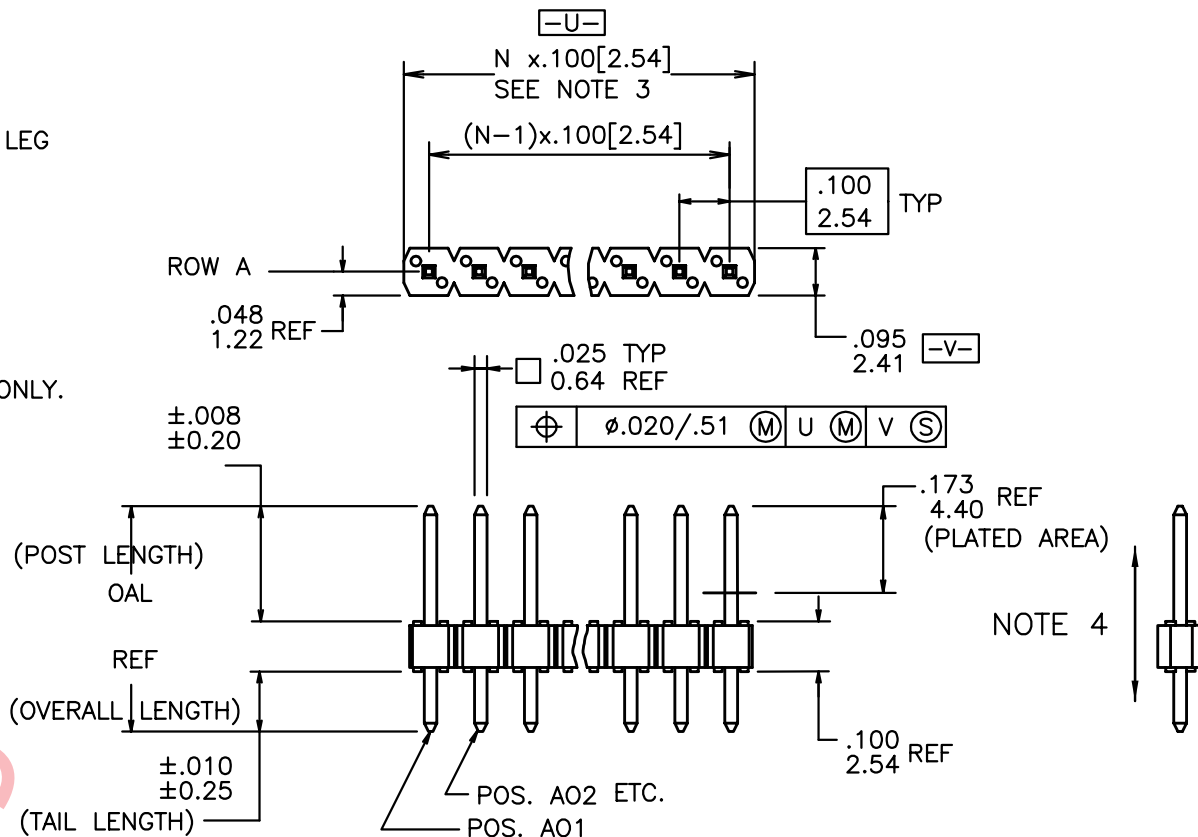

- NOTES:
- HOUSING MAT'L: HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: BLACK
  - PIN MATERIAL: PHOSPHOR-BRONZE
  - TO DETERMINE DIMENSIONS:  
N = NUMBER OF POSITIONS PER ROW.  
EXAMPLE: 10 POS., N x .100[2.54]=1.00[25.40].
  - 2LBS/0.9KG MIN. PIN RETENTION IN EITHER DIRECTION.
  - RETENTIVE LEG APPLICABLE TO TAIL LENGTH .120/3.05 ONLY. (4 PINS PER PART HAVE RETENTION) 5LB/2.3KG MAX INSERTION FORCE AND .25LB./1KG MIN RETENTION FORCE PER RETENTIVE PIN USING .062/1.57 THICK CIRCUIT BOARD AND RECOMMENDED HOLE PATTERN. RETENTIVE LOCATION AT THE DISCRETION OF THE MANUFACTURER. IF FEATURE IS NOT APPLICABLE, REMOVE FROM PRODUCT NUMBER, 1x2 OR 1x3 PARTS NOT REFERENCED.
  - BERGSTIK PACKAGED IN POLY BAGS. BERGSTRIIP PACKAGED PER REEL.
  - POLARIZATION AND RETENTION NOT APPLICABLE TO BERGSTRIIP.
  - UNDERPLATING: 50μ"/1.27μm Ni.
  - FOR POLARIZATION SPECIFY POSITION NUMBER (i.e.. A03=ROW A POS. 3) TO OMIT PIN. IF FEATURE IS NOT APPLICABLE, REMOVE FROM PRODUCT NUMBER.
  - POSITIONS PER ROW 37 TO 50 CAN BE PRODUCED, BUT FLATNESS AND CURVATURE MAY NOT BE HELD AS CLOSE AS 36 POSITION.

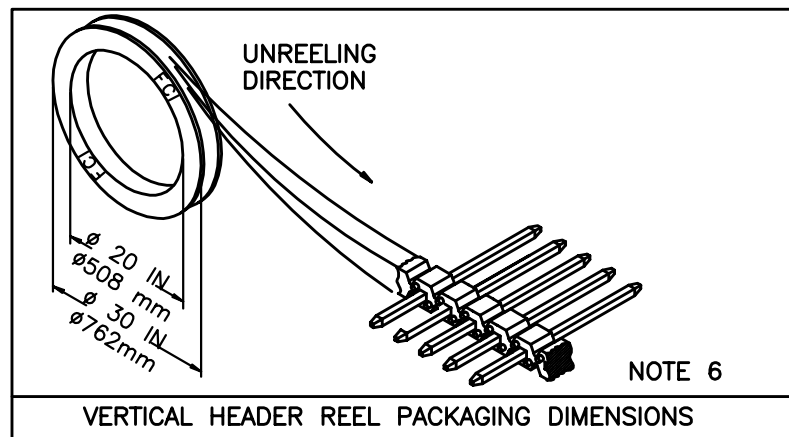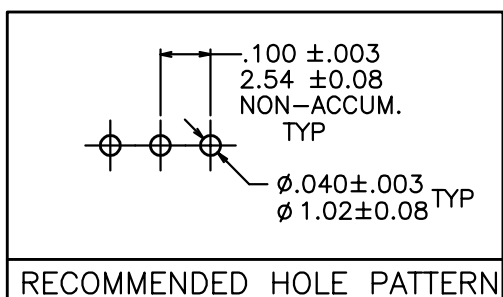

mat'l. code SEE NOTES 1 & 2				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX ±.01/0.3	projection	title	
B	V94313	DAI	11/03/99		.XXX ±.005/0.13	INCH/MM	.100 UNSHROUDED HDR. S/R VERT. THRU HOLE	
C	V01833	MDF	07/18/00	angles	.XXXX ±.0020/0.051		product family BERGSTIK code	
D	V01988	MDF	08/07/00		0° ±2°	scale	size	
E	V02373	AZ	10/02/00	dr	D.INGRAM 05/10/99	1:1	54101	
F	V12228	DAI	09/17/01	enr	H.SUNDY 07/15/99		213	
G	V20160	GIP	01/23/02	chr	H.SUNDY 07/15/99		sheet	
H	V20751	GIP	04/11/02	appd	H.SUNDY 07/15/99		1 of 1	
sheet index	revision sheet	H	1				cage code 22526	