


HIGH VOLTAGE TRANSISTORS






TO-3

TYPE NO.	PT	@		@		@		hFE		@		@		V _{BE}		f _T MIN		
	@	I _C	V _{CE0}	I _C	V _{CE0}	I _{CEO}	V _{CEX}	I _C	MIN	MAX	I _C	V _{CE}	V _{CE}	I _C	V			
	25°C	MAX	SUS				(125°C)						(SAT)		MHz			
	Watts	A	V	MA	V	MA	V	MA			A	V	V	MA	V	A	V	
2N3788	100	2.0	325	100	400	5.0			20	80	.5	5	5	5	1.0	1.5	1.2	5
† 2N3902	100	3.5	325	100	400	.25	700*	2.5	30	90	1.0	5	5	5	.8	1.0	1.5	4**
† 2N5157	100	3.5	400	100	500	.25	700*	.5	30	90	1.0	5	5	5	.8	1.0	1.5	4**

*V_{CEX} @ 25°C + JAN and JANTX
 **f_T typical





2N3902

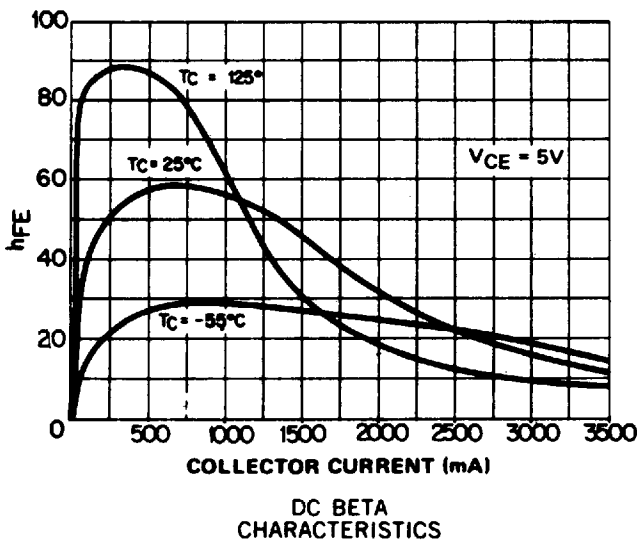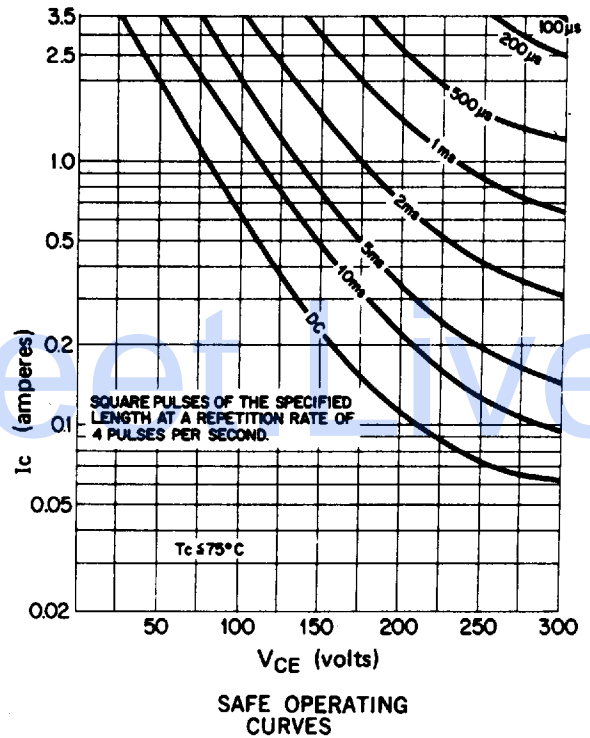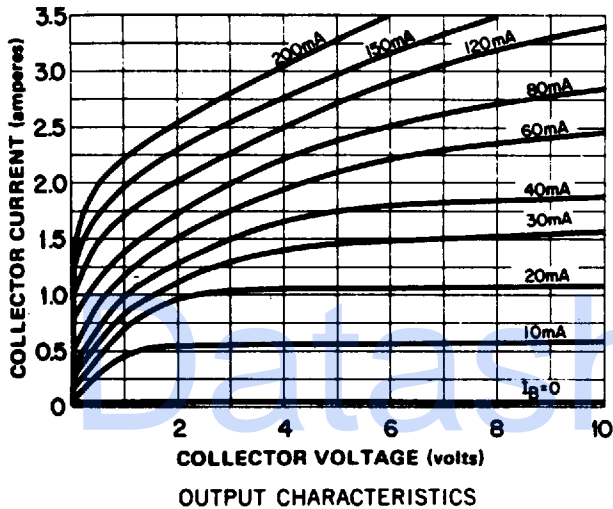

Solid Power Corporation

0043592 0000416 T59

2N5157

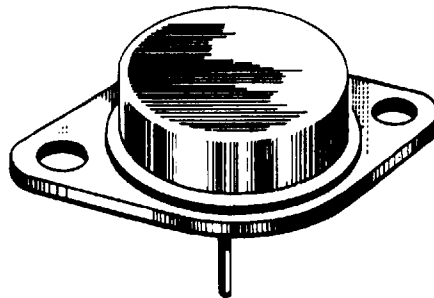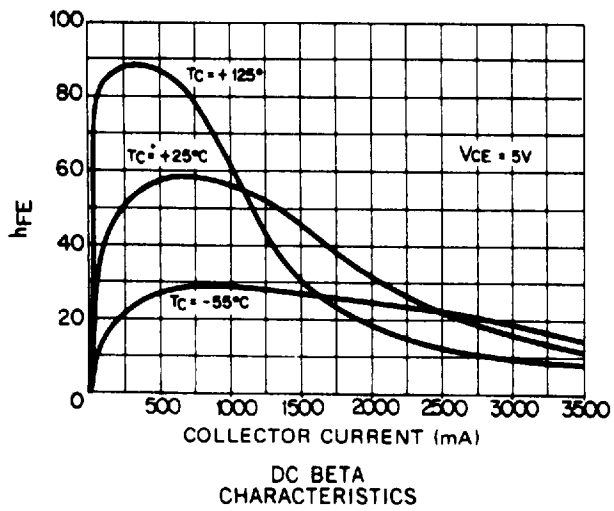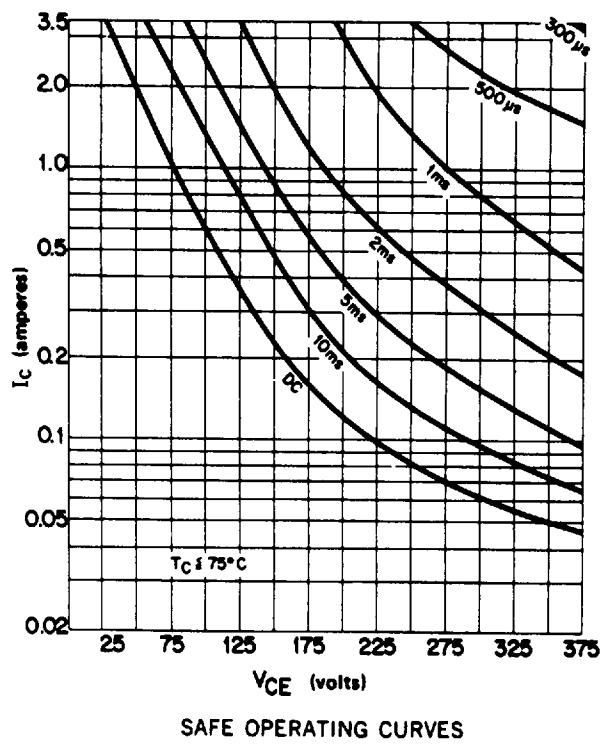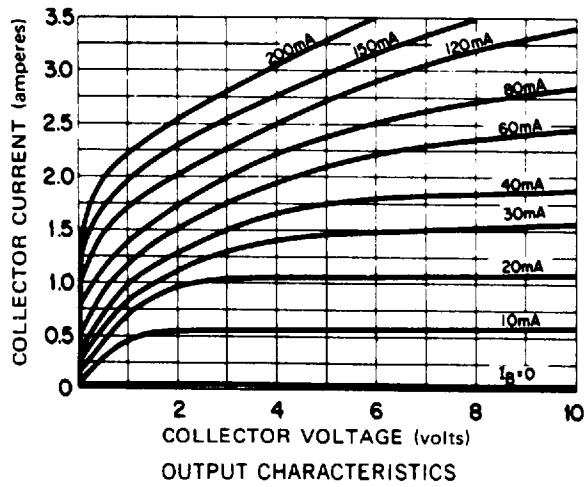

CASE OUTLINES

