



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

RS801M THRU RS807M

Features

- Low Leakage
- Low Forward Voltage
- Any Mounting Position
- Silver Plated Copper Leads
- Surge Overload Rating Of 300 Amps
- UL Recognized File # E165989


Maximum Ratings

- Operating Junction Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
RS801M	RS801M	50V	35V	50V
RS802M	RS802M	100V	70V	100V
RS803M	RS803M	200V	140V	200V
RS804M	RS804M	400V	280V	400V
RS805M	RS805M	600V	420V	600V
RS806M	RS806M	800V	560V	800V
RS807M	RS807M	1000V	700V	1000V

8 Amp Single Phase Bridge Rectifier 50 to 1000 Volts

RS-6M

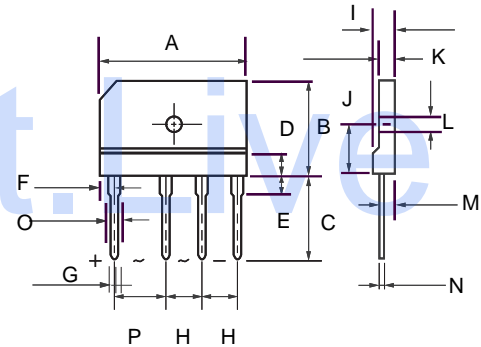

Electrical Characteristics @ 25°C Unless Otherwise Specified


Average Forward Current	$I_{F(AV)}$	8.0A	$T_A = 65^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	300A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element	V_F	1.1V	$I_{FM} = 4.0\text{A}; T_J = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	10 μA 1mA	$T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 1%

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	1.169	1.193	29.70	30.30	
B	.697	.800	17.70	20.30	
C	.669	.708	17.00	18.00	
D	.197		5.00		
E	.150	.165	3.80	4.20	
F	.091	.106	2.30	2.70	
G	.035	.043	0.90	1.10	
H	.287	.303	7.30	7.70	
I	.173	.189	4.40	4.80	
J	.425	.441	10.80	11.20	
K	.134	.150	3.40	3.80	
L	.122	.134	3.10	3.40	
M	.098	.114	2.50	2.90	
N	.023	.031	0.60	0.80	
O	.078	.094	2.00	2.40	
P	.386	.402	9.80	10.20	


RS801M thru RS807M

Figure 1
Typical Forward Characteristics

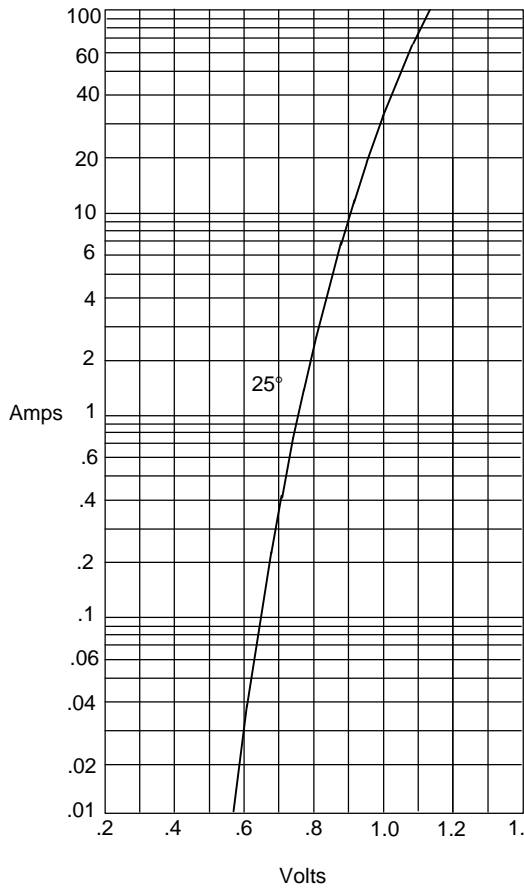


Instantaneous Forward Current - Amperes versus Instantaneous Forward Voltage - Volts

Figure 2
Micro Commercial Components
Typical Reverse Characteristics

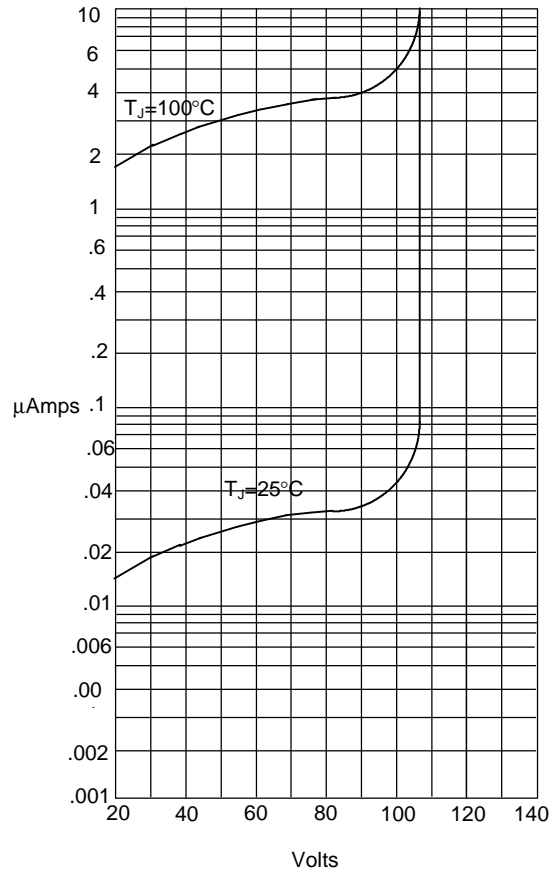


Instantaneous Reverse Leakage Current - MicroAmperes versus Percent Of Rated Peak Reverse Voltage - Volts

Figure 3
Forward Derating Curve

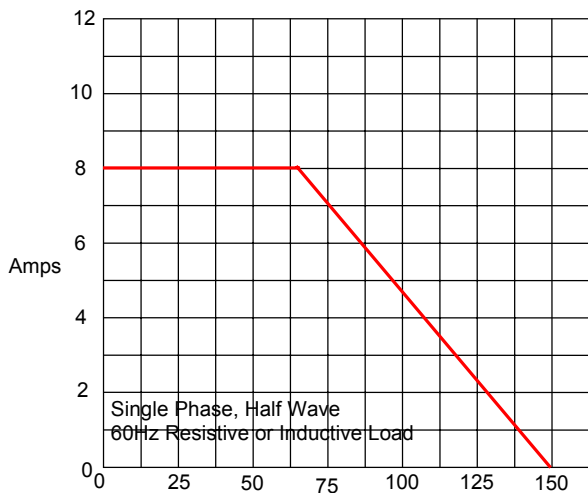

Average Forward Rectified Current - Amperes versus Case Temperature - °C

Figure 4
Peak Forward Surge Current

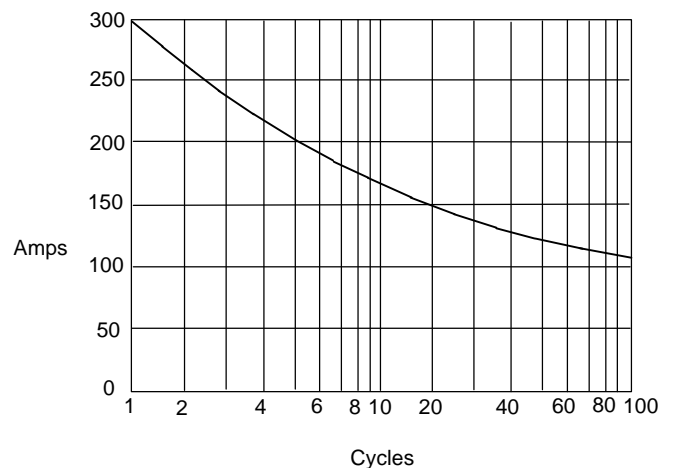

Peak Forward Surge Current - Amperes versus Number Of Cycles At 60Hz - Cycles