


PART NO.	ENG. NO.	CIRCUIT SIZE	MATERIAL (SEE NOTE 1)	DIM. "A"	DIM. "B"	DIM. "C"
050-84-2010	42022-1A	1	A	1.090 (27.70)	.380 (9.65)	----
050-84-2011	42022-1B	1	B			
050-84-2012	42022-1C	1	C			
366440001	36644-001	1	D			
050-84-2020	42022-2A	2	A	1.090 (27.70)	.620 (15.75)	.300 (7.62)
050-84-2021	42022-2B	2	B			
050-84-2022	42022-2C	2	C			
366440002	36644-002	2	D			
050-84-2030	42022-3A	3	A	1.090 (27.70)	.620 (15.75)	.300 (7.62)
050-84-2031	42022-3B	3	B			
050-84-2032	42022-3C	3	C			
366440003	36644-003	3	D			
050-84-2040	42022-4A	4	A	1.090 (27.70)	.620 (15.75)	.300 (7.62)
050-84-2041	42022-4B	4	B			
050-84-2042	42022-4C	4	C			
366440004	36644-004	4	D			
050-84-2060	42022-6A	6	A	1.090 (27.70)	1.120 (28.45)	.800 (20.32)
050-84-2061	42022-6B	6	B			
050-84-2062	42022-6C	6	C			
366440005	36644-005	6	D			
PRELIMINARY	42022-8A	8	A	1.090 (27.70)	.620 (15.75)	.300 (7.62)
PRELIMINARY	42022-8B	8	B			
PRELIMINARY	42022-8C	8	C			
050-84-2090	42022-9A	9	A			
050-84-2091	42022-9B	9	B	1.090 (27.70)	1.120 (28.45)	.800 (20.32)
050-84-2092	42022-9C	9	C			
366440006	36644-006	9	D			
050-84-2120	42022-12A	12	A			
050-84-2121	42022-12B	12	B	1.090 (27.70)	1.120 (28.45)	.800 (20.32)
050-84-2122	42022-12C	12	C			
366440007	36644-007	12	D			
050-84-2150	42022-15A	15	A			
050-84-2151	42022-15B	15	B	1.090 (27.70)	1.120 (28.45)	.800 (20.32)
050-84-2152	42022-15C	15	C			
366440008	36644-008	15	D			

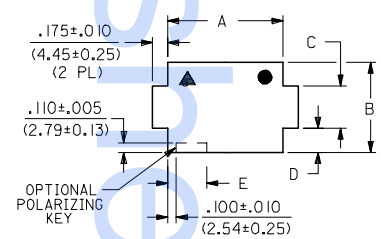

RECOMMENDED PANEL CUTOUT
 PANEL THICKNESS: .030-.090/(0.76-2.29)
 (SEE NOTE 6)


CIRCUIT SIZE	DIMENSIONS				
	A*.005	B*.005	C*.010	D*.010	E*.010
2	.565 (14.35)	.530 (13.46)	.340 (8.64)	.095 (2.41)	.250 (6.35)
3	.815 (20.70)	.530 (13.46)	.340 (8.64)	.095 (2.41)	.250 (6.35)
4	1.065 (27.05)	.530 (13.46)	.340 (8.64)	.095 (2.41)	.250 (6.35)
6	.565 (14.35)	1.030 (26.16)	.480 (12.19)	.275 (6.99)	.250 (6.35)
8	2.065 (52.45)	.530 (13.46)	.340 (8.64)	.095 (2.41)	.250 (6.35)
9	.815 (20.70)	1.030 (26.16)	.480 (12.19)	.275 (6.99)	.250 (6.35)
12	1.065 (27.05)	1.030 (26.16)	.480 (12.19)	.275 (6.99)	.350 (8.89)
15	1.315 (33.40)	1.030 (26.16)	.480 (12.19)	.275 (6.99)	.350 (8.89)

- ▲ - CIRCUIT #1 LOCATION WHEN USING POLARIZING KEY OPTION WITH 2, 3, 4 AND 8 CIRCUIT HOUSINGS.
- - OPTION WITH 6, 9, 12 AND 15 CIRCUIT HOUSINGS.

NOTES:

- MATERIAL CODES:
 "A"= NYLON TYPE 6/6, 94V-2
 COLOR: NATURAL (WHITE/TRANSLUCENT)
 "B"= NYLON TYPE 6/6, 94V-0
 COLOR: (BRICK RED)
 "C"= NYLON TYPE 6/6 94V-0
 COLOR: NATURAL (WHITE)
 D = NYLON PA6.94V-2
 COLOUR-NATURAL.899921279
 FOR GLOW WIRE APPLICATION WITH
 CTI OF 325 VOLTS
- UNLESS OTHERWISE INDICATED, DIMENSIONS ARE FOR REFERENCE ONLY.
- CAP HOUSINGS MATE WITH :
 - PLUG HOUSINGS, .084/(2.13) DIA. SERIES: (42021-***)
- HOUSINGS DESIGNED TO BE USED WITH TERMINALS:
 - PINS, .084/(2.13) DIA. SERIES: (42023-****)
 - SOCKETS, .084/(2.13) DIA. SERIES: (42024-****)
- CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.
- PANEL TO BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL OPPOSITE THE SIDE WITH THE BURR (I.E. OPPOSITE THE BREAK SIDE).
- PRODUCT SPECIFICATION PS-42022-0001 APPLIES.

LEGEND:



ENTER DESCRIPTION E.C. NO. (2008-0209) D (DRAWN) D (CHECKED) D (APPROVED)	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED) DIM INCH ±.005 DIM MILL ±.025 ANGULAR ±.030	DIMENSION STYLE IN/MM DATE 8/7/11/15 CHECKED BY DATE 8/7/11/15 APPROVED BY DATE 8/7/11/15	SCALE --- DESIGN UNITS INCH THIRD ANGLE PROJECTION	MATERIAL NO. SD-42022-*** DOCUMENT NO. SD-42022-*** SHEET NO. 1 OF 00
	HOUSING, CAP .084/(2.13) DIA. SERIES				
	MOLEX INCORPORATED				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				