

**FAST RECOVERY  
GLASS PASSIVATED RECTIFIERS**

REVERSE VOLTAGE - **50 to 600** Volts  
FORWARD CURRENT - **1.0** Ampere


**FEATURES**

- Fast switching for high efficiency
- Glass passivated chip
- Low reverse leakage current
- Low forward voltage drop
- High current capability
- Plastic material has UL flammability classification 94V-0

**MECHANICAL DATA**

- Case : JEDEC A-405 molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.008 ounces, 0.22 grams
- Mounting position : Any

**A-405**

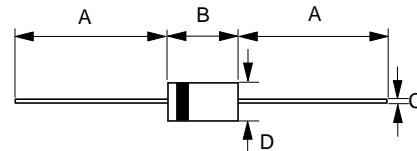

A-405		
Dim.	Min.	Max.
A	25.4	-
B	4.10	5.20
C	0.53 $\varnothing$	0.64 $\varnothing$
D	2.00 $\varnothing$	2.70 $\varnothing$
All Dimensions in millimeter		


**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%


CHARACTERISTICS	SYMBOL	1N4933GL	1N4934GL	1N4935GL	1N4936GL	1N4937GL	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	V
Maximum Average Forward Rectified Current @TA=75°C	I(AV)	1.0					A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load	IFSM	30					A
Maximum forward Voltage at 1.0A DC	VF	1.3					V
Maximum DC Reverse Current @TJ=25°C at Rated DC Blocking Voltage @TJ=100°C	IR	5.0					uA
Typical Reverse Recovery Time (Note 1)	TRR	200					ns
Typical Reverse Recovery Time (Note 2)	TRR	130					ns
Typical Junction Capacitance (Note 3)	CJ	15					pF
Typical Thermal Resistance (Note 4)	RθJA	50					°C/W
Operating Temperature Range	TJ	-55 to +150					°C
Storage Temperature Range	TSTG	-55 to +150					°C

- NOTES : 1.Measured with IF=1.0A,VR=30V,di/dt=50A/us.  
2.Measured with IF=0.5A,IR=1A,IRR=0.25A.  
3.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.  
4.Thermal Resistance Junction to Ambient.


**FIG.1 - FORWARD CURRENT DERATING CURVE**

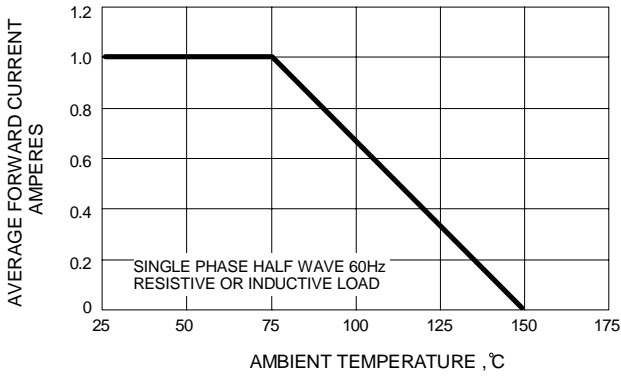

**FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT**

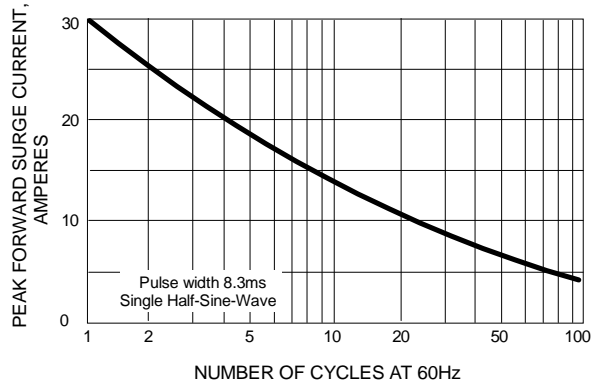

**FIG.3 - TYPICAL JUNCTION CAPACITANCE**

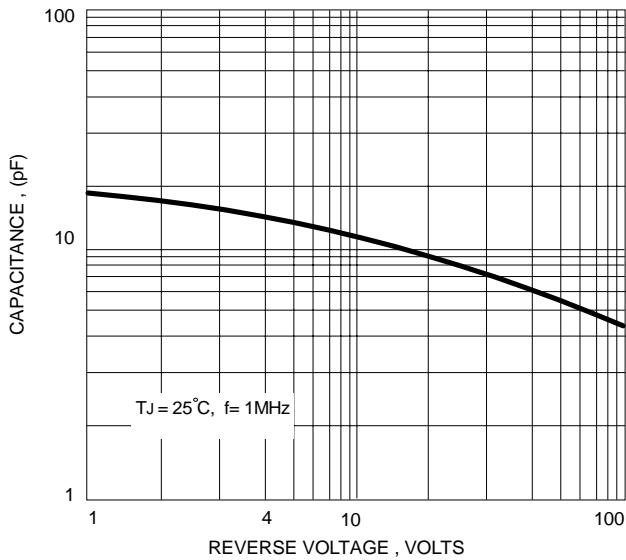

**FIG.4 - TYPICAL FORWARD CHARACTERISTICS**

