


Straight through hole type female connector for PCB
LPC-()FD()

For PCB

Straight Through hole

RoHS

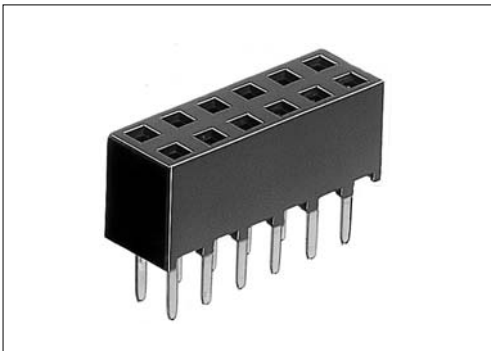



● Configuration of product Part No.

LPC- () FD ()

① ② ③

- ① Series name
- ② No. of contacts: 4-50
- ③ Contact plating
+C : Tin copper plate
G+ : Gold plate

Datasheet.Live

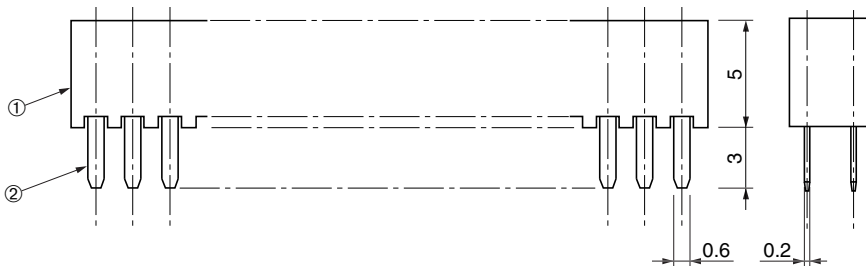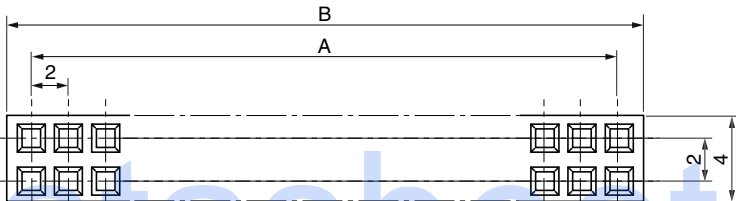

● Dimensions

Part No.	A	B
LPC-4FD()	2	4.6
LPC-6FD()	4	6.6
LPC-8FD()	6	8.6
LPC-10FD()	8	10.6
LPC-12FD()	10	12.6
LPC-14FD()	12	14.6
LPC-16FD()	14	16.6
LPC-18FD()	16	18.6
LPC-20FD()	18	20.6
LPC-22FD()	20	22.6
LPC-24FD()	22	24.6
LPC-26FD()	24	26.6
LPC-28FD()	26	28.6
LPC-30FD()	28	30.6
LPC-32FD()	30	32.6
LPC-34FD()	32	34.6
LPC-36FD()	34	36.6
LPC-38FD()	36	38.6
LPC-40FD()	38	40.6
LPC-42FD()	40	42.6
LPC-44FD()	42	44.6
LPC-46FD()	44	46.6
LPC-48FD()	46	48.6
LPC-50FD()	48	50.6

● Components

①	Insulator
②	Contacts

Because some combinations of "Configurations of Product Part No.", are under consideration for development, please contact us for availability details.

Mating connectors: LPC series male connectors

Accessories: Polarization key: LPC-PK1