

## 15,000W Transient Voltage Suppressor

- High Reliability controlled devices
- Unidirectional (A) and Bidirectional (CA) construction
- Plastic encapsulated TVS series for Thru Hole mounting
- Selections for 22.0 to 280 V standoff voltages (VWM)

DEVICES	LEVELS
<b>M15KP22A thru M15KP280CA, e3</b>	<b>M, MA, MX, MXL</b>
<b>FEATURES</b>	
<ul style="list-style-type: none"> <li>▪ High reliability controlled devices with wafer fabrication and assembly lot traceability</li> <li>▪ 100 % surge tested devices</li> <li>▪ Suppresses transients up to 15 kW @ 10/1000 <math>\mu</math>s and 100 kW @ 8/20 <math>\mu</math>s (see Figure 1)</li> <li>▪ Optional upscreaming available by replacing M prefix with MA, MX or MXL prefixes. These prefixes specify various screening and conformance inspection options based on MIL-PRF-19500. Refer to <a href="#">MicroNote 129</a> for more details on the screening options</li> <li>▪ Moisture classification is Level 1 with no dry pack required per IPC/JEDEC J-STD-020B</li> <li>▪ RoHS Compliant devices available by adding "e3" suffix</li> <li>▪ 3<math>\sigma</math> lot norm screening performed on Standby Current <math>I_D</math></li> </ul>	
<b>APPLICATIONS / BENEFITS</b>	
<ul style="list-style-type: none"> <li>▪ Protection from switching transients and induced RF</li> <li>▪ Fast response</li> <li>▪ Protection from ESD, and EFT per IEC 61000-4-2 and IEC 61000-4-4</li> <li>▪ Secondary lightning protection per IEC 61000-4-5 with 42 Ohms source impedance: <ul style="list-style-type: none"> <li>○ Class 1,2,3,4: M15KP22A to M15KP280CA</li> <li>○ Class 5: M15KP22A to M15KP280CA (short distance)</li> <li>○ Class 5: M15KP22A to M15KP110CA (long distance)</li> </ul> </li> <li>▪ Secondary lightning protection per IEC 61000-4-5 with 12 Ohms source impedance: <ul style="list-style-type: none"> <li>○ Class 1 &amp; 2: M15KP22A to M15KP280CA</li> <li>○ Class 3: M15KP22A to M15KP240CA</li> <li>○ Class 4: M15KP22A to M15KP120CA</li> </ul> </li> <li>▪ Secondary lightning protection per IEC 61000-4-5 with 2 Ohms source impedance: <ul style="list-style-type: none"> <li>○ Class 2: M15KP22A to M15KP220CA</li> <li>○ Class 3: M15KP22A to M15KP110CA</li> <li>○ Class 4: M15KP22A to M15KP54CA</li> </ul> </li> </ul>	
<b>MAXIMUM RATINGS</b>	
<ul style="list-style-type: none"> <li>▪ Peak Pulse Power dissipation at 25 °C: 15,000 watts at 10/1000 <math>\mu</math>s (also see Figures 1 and 2) with impulse repetition rate (duty factor) of 0.05 % or less</li> <li>▪ <math>t_{clamping}</math> (0 V to <math>V_{BR}</math> min.): &lt; 100 ps theoretical for unidirectional and &lt; 5 ns for bidirectional</li> <li>▪ Operating and Storage temperature: -65 °C to +150 °C</li> <li>▪ Thermal resistance: 20 °C/W junction to lead, or 80°C/W junction to ambient when mounted on FR4 PC board with 4 mm<sup>2</sup> copper pads (1oz) and track width 1 mm, length 25 mm</li> <li>▪ Steady-State Power dissipation: 6 watts at <math>T_L = 30^\circ\text{C}</math>, or 1.56 watts at <math>T_A = 25^\circ\text{C}</math> when mounted on FR4 PC board described for thermal resistance</li> <li>▪ Forward Surge: 200 Amps 8.3 ms half-sine wave for unidirectional devices only</li> <li>▪ Solder temperatures: 260 °C for 10 s (maximum)</li> </ul>	




**CASE 5A  
(DO-204AR)**

## MECHANICAL AND PACKAGING

- Void-free transfer molded thermosetting epoxy body meeting UL94V-0 requirements
- Tin-Lead (90 % Sn, 10 % Pb) or RoHS (100% Sn) Compliant annealed matte-Tin plating readily solderable per MIL-STD-750, method 2026
- Body marked with part number
- Band denotes cathode. Bidirectional not marked.
- Available in Bulk or custom tape-and-reel packaging
- TAPE-AND-REEL standard per EIA-296 for axial package (add "TR" suffix to part number)
- Weight: 1.4 grams (approximate)

## PACKAGE DIMENSIONS

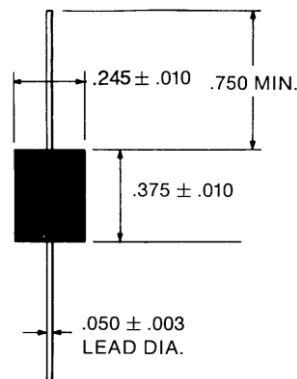

### CASE 5A

Dimensions in inches

## SYMBOLS & DEFINITIONS

Symbol	Definition	Symbol	Definition
$V_{WM}$	Working Peak (Standoff) Voltage	$I_{PP}$	Peak Pulse Current
$P_{PP}$	Peak Pulse Power	$V_C$	Clamping Voltage
$V_{BR}$	Breakdown Voltage	$I_{BR}$	Breakdown Current for $V_{BR}$
$I_D$	Standby Current		


## ELECTRICAL CHARACTERISTICS @ 25°C

MICROSEMI PART NUMBER (Note 2)	REVERSE STAND-OFF VOLTAGE $V_{WM}$ (Note 1)	MINIMUM BREAKDOWN VOLTAGE $V_{BR}$ @ $I_{BR}$		MAXIMUM CLAMPING VOLTAGE $V_C$ @ $I_{PP}$	MAXIMUM STANDBY CURRENT $I_D$ @ $V_{WM}$	MAXIMUM PEAK PULSE CURRENT $I_{PP}$ (FIG. 2)	MAXIMUM VOLTAGE TEMPERATURE VARIATION $\alpha_{V(BR)}$
	V	V	mA	V	$\mu A$	A	mV/°C
M15KP22A	22	24.4	10	37.1	500	404	24
M15KP24A	24	26.7	5	40.7	150	369	27
M15KP26A	26	28.9	5	44.0	50	341	29
M15KP28A	28	31.1	5	47.5	25	316	31
M15KP30A	30	33.3	5	50.7	15	296	34
M15KP33A	33	36.7	5	54.8	10	274	38
M15KP36A	36	40.0	5	59.7	10	251	41
M15KP40A	40	44.4	5	65.8	10	228	46
M15KP43A	43	47.8	5	69.7	10	215	50
M15KP45A	45	50.0	5	73.0	10	205	52
M15KP48A	48	53.3	5	77.7	10	193	56
M15KP51A	51	56.7	5	82.8	10	181	60
M15KP54A	54	60.0	5	87.5	10	171	63
M15KP58A	58	64.4	5	94.0	10	160	68
M15KP60A	60	66.7	5	97.3	10	154	71
M15KP64A	64	71.1	5	104	10	144	76
M15KP70A	70	77.8	5	114	10	132	83
M15KP75A	75	83.3	5	122	10	123	89
M15KP78A	78	86.7	5	126	10	119	93
M15KP85A	85	94.4	5	137	10	109	102
M15KP90A	90	100	5	146	10	103	109
M15KP100A	100	111	5	162	10	93	121
M15KP110A	110	122	5	178	10	84	133
M15KP120A	120	133	5	193	10	78	145
M15KP130A	130	144	5	209	10	72	157
M15KP150A	150	167	5	243	10	62	183
M15KP160A	160	178	5	259	10	58	195
M15KP170A	170	189	5	275	10	55	207
M15KP180A	180	200	5	291	10	52	219
M15KP200A	200	222	5	322	10	47	243
M15KP220A	220	245	5	356	10	42	269
M15KP240A	240	267	5	388	10	39	293
M15KP260A	260	289	5	419	10	36	317
M15KP280A	280	311	5	452	10	33	342


**NOTE 1:** Transient Voltage Suppressors are normally selected with reverse "Standoff Voltage"  $V_{WM}$  which should be equal to or greater than the dc or continuous peak operating voltage level.

**NOTE 2:** For bidirectional construction, indicate a CA suffix after the part number.

\*\* Consult factory for availability of the 17 and 18 Volt devices on a special order basis.

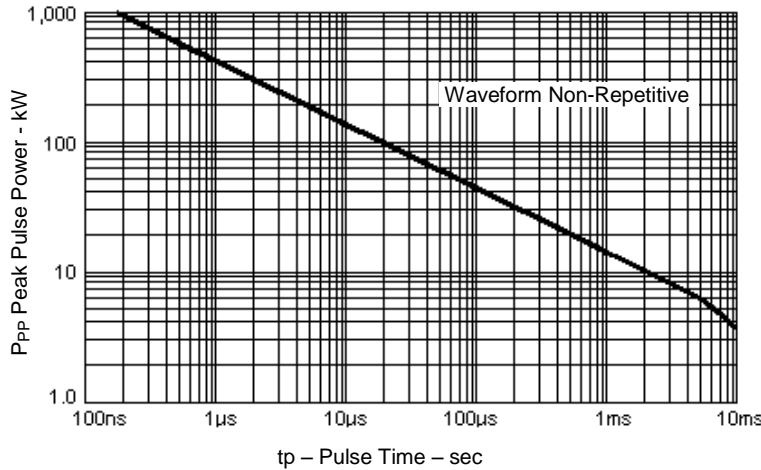
**GRAPHS**


**FIGURE 1**  
 Peak Pulse Power vs. Pulse Time to 50% of Exponentially Decaying Pulse

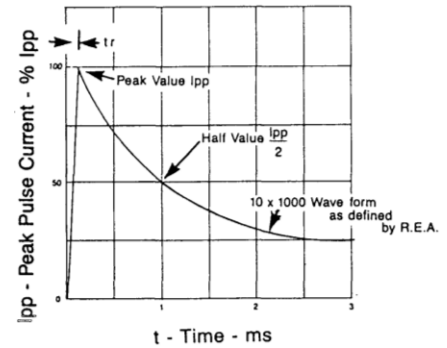


Test waveform parameters:  
 tr=10  $\mu$ s, tp=1000  $\mu$ s

**FIGURE 2 : Pulse Waveform**

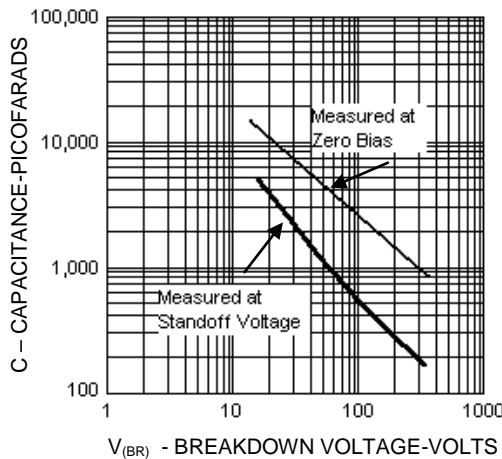

**FIGURE 3** Typical Capacitance vs. Breakdown Voltage

**NOTE:** For Bidirectional Construction, indicate a C or CA suffix after part number. Capacitance will be one-half that shown in Figure 3.

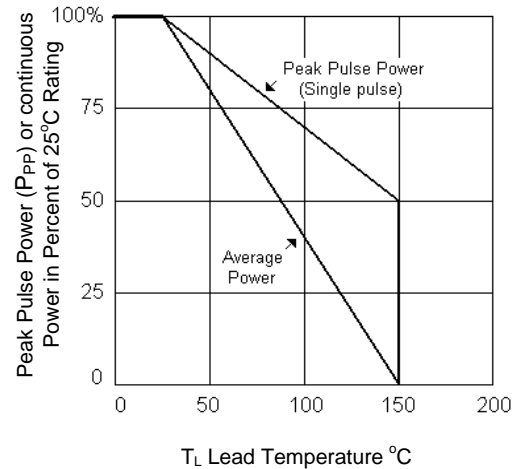

**FIGURE 4** Derating