DIMENSIONS

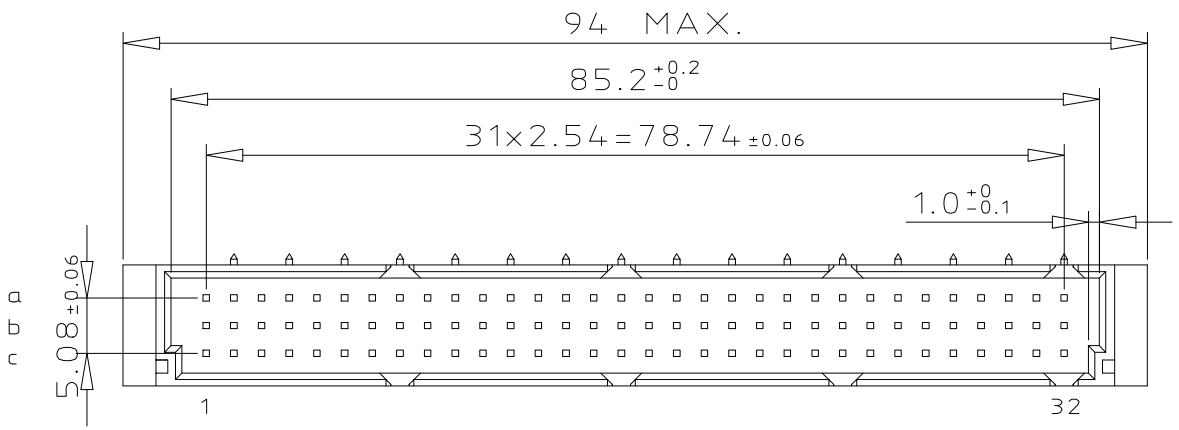

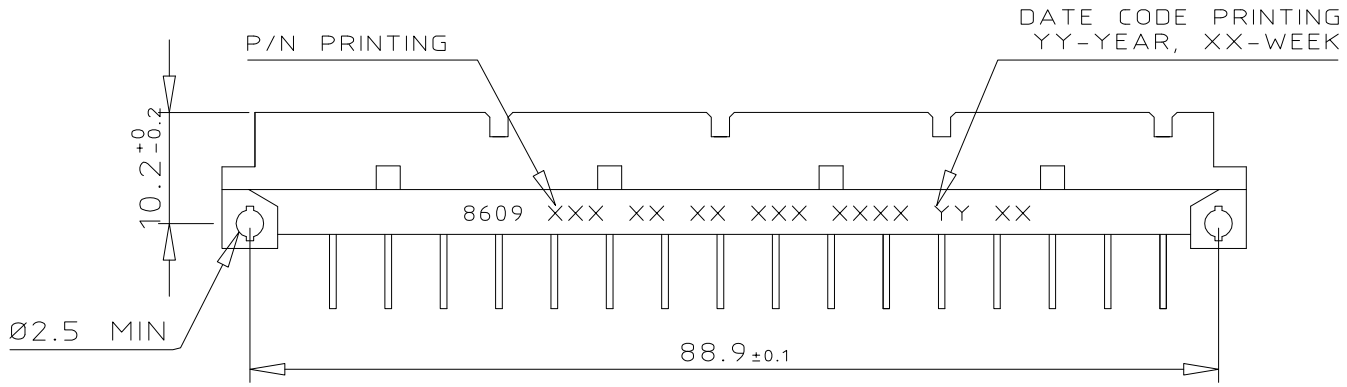

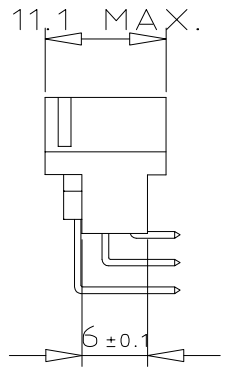

TERMINATION

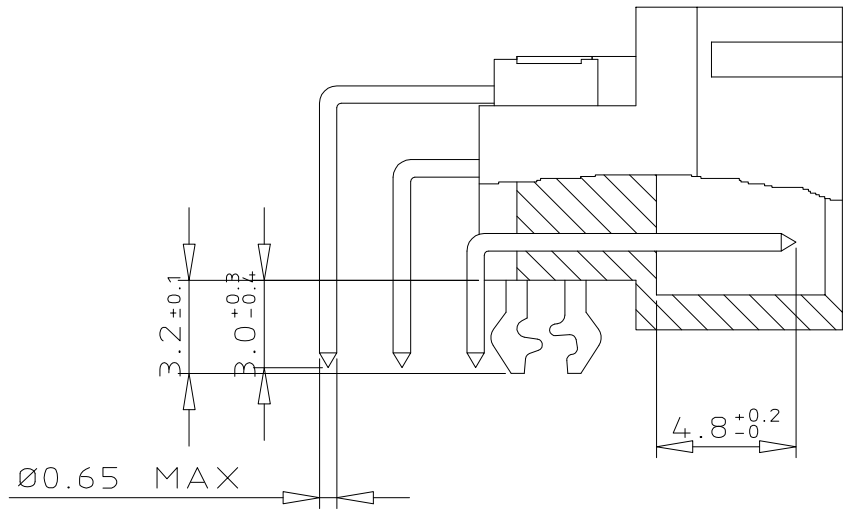

ORDERING INFORMATION

SERIES	8609	3	48	7	1	13	7	4	8	ELF

ROWS FITTED WITH CONTACTS
- ROW a b c . . . . . 3 — 48
- ROW a - c . . . . . 4 — 32

NO. OF CONTACTS

TYPE OF INSULATOR
- 3 ROW MALE INSULATOR 7

METHOD OF MOUNTING
- STANDARD MOUNTING - STYLE C 1

TERMINATION
- ANGLED SPILL 13

OPTIONS
- NO OPTION 7
- WITH HARPOONS . . . . . H

PERFORMANCE CLASS
- DIN 41612 CLASS 3 4
- DIN 41612 CLASS 2 5
- DIN 41612 CLASS 1 6
- AS PER MIL C 55302 / JSS 50808 8

PITCH PER ROW
- 5.08 mm EVEN LOADING 8

LEAD FREE VERSION . . . . . ELF

PCB LAYOUT

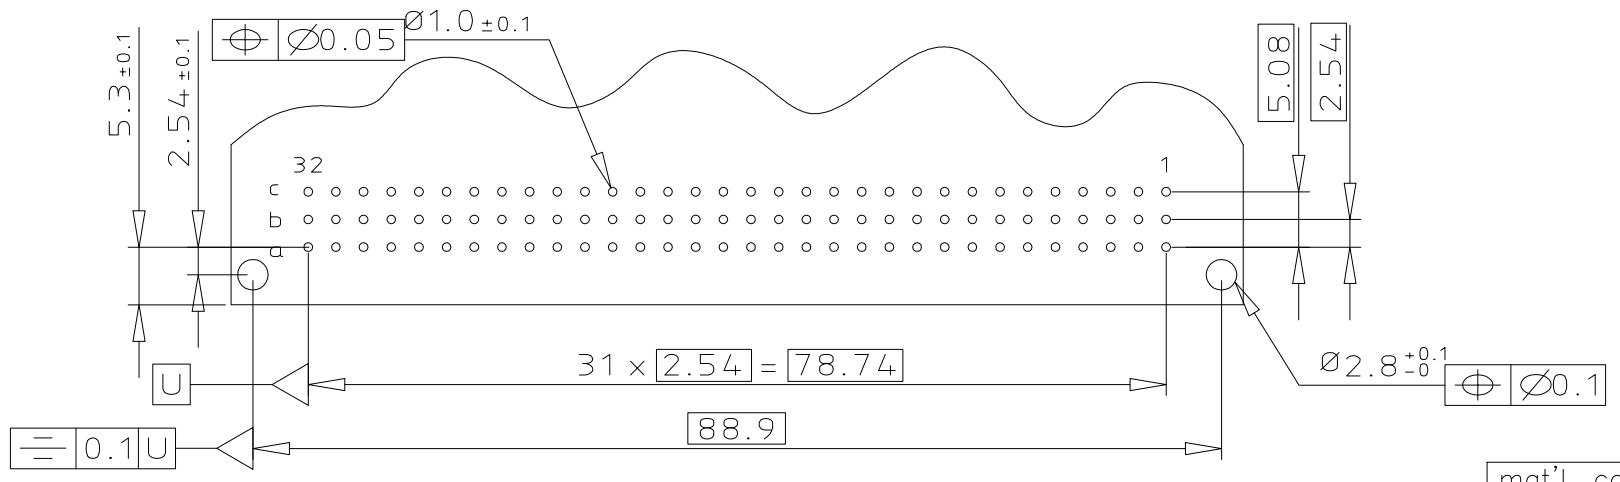

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	surface	tolerance	projection	product family
SEE DWG C-8609-0000A	ISO 1302	ISO 406 ISO 1101		8609

ltr	ecn no	dr	date
A	104-0084	MINI	2004-09-18
B	105-0089	MINI	2005-05-19
C	106-0061	MINI	2006-05-31
D	107-0111	KR	2007-09-05
E	108-0146	KR	2008-10-22

tolerances unless otherwise specified

angles	linear	
0°±2°		0.X ±0.1
		0.XX ±0.1
		0.XXX ±0.1

dr	MINI K V	2004-09-18
engr	RAKHEE G	2004-09-18
chr	KESAVAN R	2008-10-21
appd	KESAVAN R	2008-10-21

mm

scale 3:2

title: DIN STANDARD HEADER DIN 41612 STYLE C

dwg no: C-8609-2002 | sheet 1 of 1 | size A3

type Product Customer Drawing

sheet index	revision	E
	sheet	1

form: A3

FCIconnect.com
Copyright FCI
Printed: May 14, 2011
STATUS: Released
PDM: Rev:E
Default