THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm²]	TAB SIZE INCH [mm]	DIMENSIONS in. [mm]		
			L ± .03 [0,8]	W ± .01 [0,3]	H ± .01 [0,3]
ED18-250MB	#22-18 [0,5-1,0]	.250 X .032 [6,3 X 0,8]	.69 [17,4]	.25 [6,3]	.03 [0,8]
ED14-250MB	#16-14 [1,5-2,5]		.69 [17,4]	.25 [6,3]	.03 [0,8]

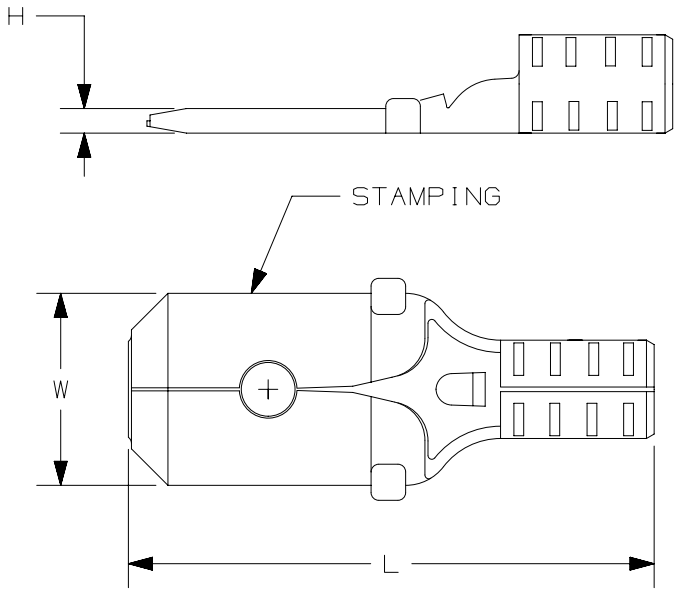

NOTES:

1. USED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 302°F [150°C] MAX. OPERATING TEMPERATURE
   C. 2000 V. MAX VOLTAGE RATING

2. MATERIAL:
   A. STAMPING: .016" [.41] THK. BRASS, NICKEL PLATED

3. INSTALLATION TOOLS: CT-100A, CT-200, CT-260, CT-600A (CT-570CH), CT-2500(CT-2570CH)

4. WIRE STRIP LENGTH: 9/32" $^{+1/32}_{-0}$ [7,1mm $^{+0,8}_{-0}$]

5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX

6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

TITLE

STRONGHOLD MALE DISCONNECT (250 SERIES) NON-INSULATED, BUTTED SEAM #22-14 AWG

CUSTOMER DRAWING

ITEM REVISION NAME: 00123SHX/00

DATASET FILE NAME: 00123SHX_DC/00

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.x ± .1 [2.54] .xxx ± .005 [.13]

.xx ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: SH41320

DRAWN BY	DATE	CHK	SCALE	SIZE
JHNU	2/18	TMR	N.T.S.	A

SHEET 1 OF 1

D10100DA/12

www.datasheet.live