


Data Sheet 1244 Rev.C

Features

- Glass Passivated Die Construction
- 600W Peak Pulse Power Dissipation
- 5.0V – 170V Standoff Voltage
- Uni- and Bi-Directional Versions Available
- Excellent Clamping Capability
- Fast Response Time
- Plastic Case Material has UL Flammability Classification Rating 94V-O
- UL Recognized File # E224235

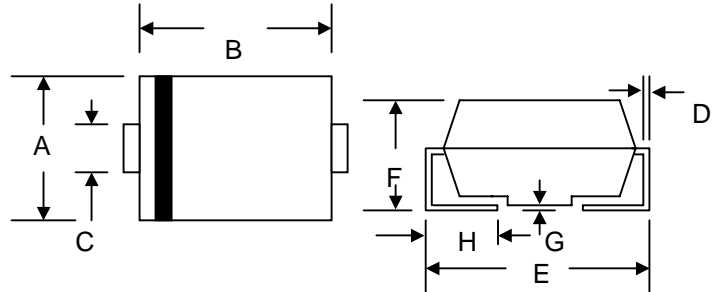

Mechanical Data

- Case: JEDEC DO-214AA Low Profile Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking:
Unidirectional – Device Code and Cathode Band
Bidirectional – Device Code Only
- Weight: 0.093 grams (approx.)

| SMB/DO-214AA | | | | |
|--------------|-------|-------|---------|-------|
| Dim | Min | Max | Min | Max |
| A | 3.30 | 3.94 | 0.130 | 0.155 |
| B | 4.06 | 4.70 | 0.160 | 0.185 |
| C | 1.91 | 2.11 | 0.075 | 0.083 |
| D | 0.152 | 0.305 | 0.006 | 0.012 |
| E | 5.08 | 5.59 | 0.2 | 0.220 |
| F | 2.13 | 2.44 | 0.084 | 0.096 |
| G | 0.051 | 0.203 | 0.002 | 0.008 |
| H | 0.76 | 1.27 | 0.029 | 0.05 |
| | in mm | | In inch | |

"C" Suffix Designates Bi-directional Devices
 "A" Suffix Designates 5% Tolerance Devices
 No Suffix Designates 10% Tolerance Devices

Maximum Ratings and Electrical Characteristics @ $T_A=25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|----------------|-------------|------------------|
| Peak Pulse Power Dissipation 10/1000 μs Waveform (Note 1, 2) Figure 1 | PPPM | 600 | W |
| Peak Pulse Current on 10/1000 μs Waveform (Note 1) Figure 3 | IPPM | See Table 1 | A |
| Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method) (Note 2, 3) | IFSM | 100 | A |
| Operating and Storage Temperature Range | T_j, T_{STG} | -55 to +150 | $^\circ\text{C}$ |

- Note: 1. Non-repetitive current pulse, per Figure 3 and derated above $T_A = 25^\circ\text{C}$ per Figure 2
 2. Mounted on 5.0mm²(0.013mm thick) land areas
 3. Measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minutes maximum

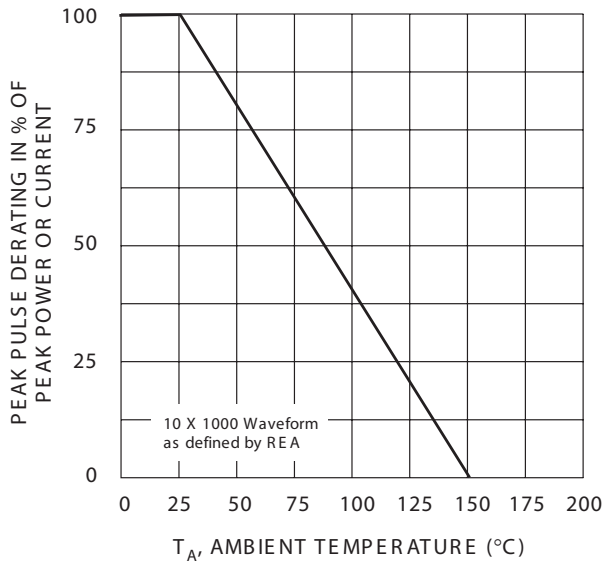


Fig. 1 Pulse Derating Curve

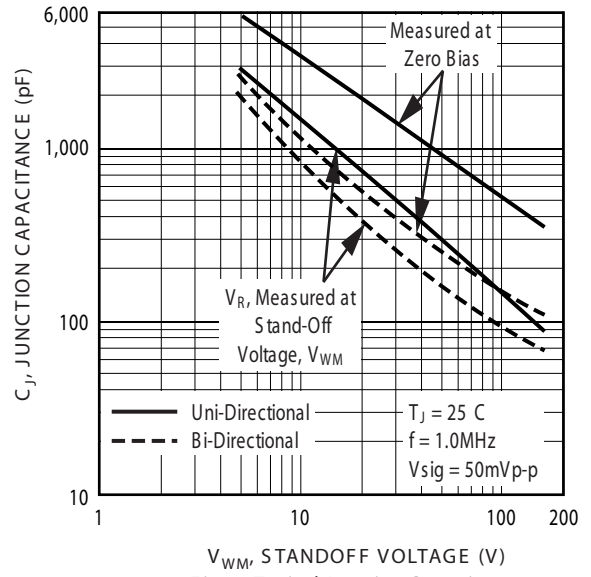


Fig. 2 Typical Junction Capacitance

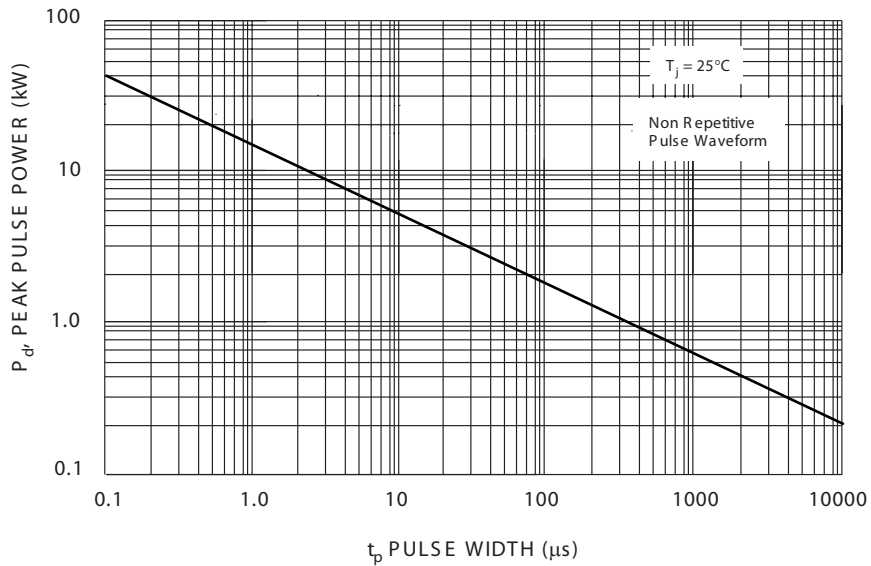


Fig. 3 Pulse Rating Curve

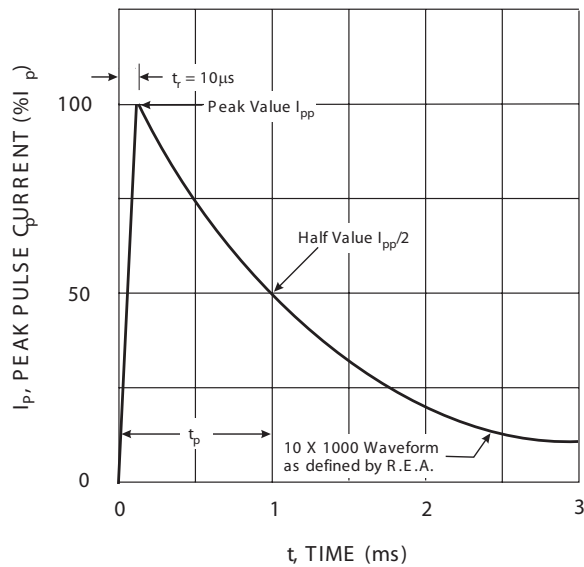


Fig. 4 Pulse Waveform

UNI-DIRECTIONAL 600 WATT SURFACE MOUNT TVS

| UNI-DIRECTIONAL PART NO. | DEVICE MARKING CODE | REVERSE STAND-OFF VOLTAGE VRWM (V) | BREAKDOWN VOLTAGE VBR (V) MIN. @IT | BREAKDOWN VOLTAGE VBR (V) MAX. @IT | TEST CURRENT IT (mA) | MAXIMUM CLAMPING VOLTAGE @Ipp Vc (V) | PEAK PULSE CURRENT Ipp (A) | REVERSE LEAKAGE @VRWM IR (uA) |
|--------------------------|---------------------|------------------------------------|------------------------------------|------------------------------------|----------------------|--------------------------------------|----------------------------|-------------------------------|
| SMBJ5.0 | KD | 5.00 | 6.40 | 7.82 | 10 | 9.6 | 62.5 | 800 |
| SMBJ5.0A | KE | 5.00 | 6.40 | 7.07 | 10 | 9.2 | 65.2 | 800 |
| SMBJ6.0 | KF | 6.00 | 6.67 | 8.15 | 10 | 11.4 | 52.6 | 800 |
| SMBJ6.0A | KG | 6.00 | 6.67 | 7.37 | 10 | 10.3 | 58.3 | 800 |
| SMBJ6.5 | KH | 6.50 | 7.22 | 8.82 | 10 | 12.3 | 48.7 | 500 |
| SMBJ6.5A | KK | 6.50 | 7.22 | 7.98 | 10 | 11.2 | 53.6 | 500 |
| SMBJ7.0 | KL | 7.00 | 7.78 | 9.51 | 10 | 13.3 | 45.1 | 200 |
| SMBJ7.0A | KM | 7.00 | 7.78 | 8.60 | 10 | 12.0 | 50.0 | 200 |
| SMBJ7.5 | KN | 7.50 | 8.33 | 10.18 | 1 | 14.3 | 42.0 | 100 |
| SMBJ7.5A | KP | 7.50 | 8.33 | 9.21 | 1 | 12.9 | 46.5 | 100 |
| SMBJ8.0 | KQ | 8.00 | 8.99 | 10.99 | 1 | 15.0 | 40.0 | 50 |
| SMBJ8.0A | KR | 8.00 | 8.99 | 9.94 | 1 | 13.6 | 44.1 | 50 |
| SMBJ8.5 | KS | 8.50 | 9.44 | 11.54 | 1 | 15.9 | 37.7 | 10 |
| SMBJ8.5A | KT | 8.50 | 9.44 | 10.43 | 1 | 14.4 | 41.7 | 10 |
| SMBJ9.0 | KU | 9.00 | 10.00 | 12.22 | 1 | 16.9 | 35.5 | 5 |
| SMBJ9.0A | KV | 9.00 | 10.00 | 11.05 | 1 | 15.4 | 39.0 | 5 |
| SMBJ10 | KW | 10.00 | 11.10 | 13.57 | 1 | 18.8 | 31.9 | 5 |
| SMBJ10A | KX | 10.00 | 11.10 | 12.27 | 1 | 17.0 | 35.3 | 5 |
| SMBJ11 | KY | 11.00 | 12.20 | 14.91 | 1 | 20.1 | 29.9 | 5 |
| SMBJ11A | KZ | 11.00 | 12.20 | 13.48 | 1 | 18.2 | 33.0 | 5 |
| SMBJ12 | LD | 12.00 | 13.30 | 16.26 | 1 | 22.0 | 27.3 | 5 |
| SMBJ12A | LE | 12.00 | 13.30 | 14.70 | 1 | 19.9 | 30.2 | 5 |
| SMBJ13 | LF | 13.00 | 14.40 | 17.60 | 1 | 23.8 | 25.2 | 5 |
| SMBJ13A | LG | 13.00 | 14.40 | 15.92 | 1 | 21.5 | 27.9 | 5 |
| SMBJ14 | LH | 14.00 | 15.60 | 19.07 | 1 | 25.8 | 23.3 | 5 |
| SMBJ14A | LK | 14.00 | 15.60 | 17.24 | 1 | 23.2 | 25.8 | 5 |
| SMBJ15 | LL | 15.00 | 16.70 | 20.41 | 1 | 26.9 | 22.3 | 5 |
| SMBJ15A | LM | 15.00 | 16.70 | 18.46 | 1 | 24.4 | 24.0 | 5 |
| SMBJ16 | LN | 16.00 | 17.80 | 21.76 | 1 | 28.8 | 20.8 | 5 |
| SMBJ16A | LP | 16.00 | 17.80 | 19.67 | 1 | 26.0 | 23.1 | 5 |
| SMBJ17 | LQ | 17.00 | 18.90 | 23.10 | 1 | 30.5 | 19.7 | 5 |
| SMBJ17A | LR | 17.00 | 18.90 | 20.89 | 1 | 27.6 | 21.7 | 5 |
| SMBJ18 | LS | 18.00 | 20.00 | 24.44 | 1 | 32.2 | 18.6 | 5 |
| SMBJ18A | LT | 18.00 | 20.00 | 22.11 | 1 | 29.2 | 20.5 | 5 |
| SMBJ20 | LU | 20.00 | 22.20 | 27.13 | 1 | 35.8 | 16.7 | 5 |
| SMBJ20A | LV | 20.00 | 22.20 | 24.54 | 1 | 32.4 | 18.5 | 5 |
| SMBJ22 | LW | 22.00 | 24.40 | 29.82 | 1 | 39.4 | 15.2 | 5 |
| SMBJ22A | LX | 22.00 | 24.40 | 26.97 | 1 | 35.5 | 16.9 | 5 |
| SMBJ24 | LY | 24.00 | 26.70 | 32.63 | 1 | 43.0 | 14.0 | 5 |
| SMBJ24A | LZ | 24.00 | 26.70 | 29.51 | 1 | 38.9 | 15.4 | 5 |
| SMBJ26 | MD | 26.00 | 28.90 | 35.32 | 1 | 46.6 | 12.4 | 5 |
| SMBJ26A | ME | 26.00 | 28.90 | 31.94 | 1 | 42.1 | 14.2 | 5 |
| SMBJ28 | MF | 28.00 | 31.10 | 38.01 | 1 | 50.0 | 12.0 | 5 |
| SMBJ28A | MG | 28.00 | 31.10 | 34.37 | 1 | 45.4 | 13.2 | 5 |
| SMBJ30 | MH | 30.00 | 33.30 | 40.70 | 1 | 53.5 | 11.2 | 5 |
| SMBJ30A | MK | 30.00 | 33.30 | 36.81 | 1 | 48.4 | 12.4 | 5 |
| SMBJ33 | ML | 33.00 | 36.70 | 44.86 | 1 | 59.0 | 10.2 | 5 |
| SMBJ33A | MM | 33.00 | 36.70 | 40.56 | 1 | 53.3 | 13.2 | 5 |
| SMBJ36 | MN | 36.00 | 40.00 | 48.89 | 1 | 64.3 | 9.3 | 5 |
| SMBJ36A | MP | 36.00 | 40.00 | 44.21 | 1 | 58.1 | 10.3 | 5 |
| SMBJ40 | MQ | 40.00 | 44.40 | 54.27 | 1 | 71.4 | 8.4 | 5 |
| SMBJ40A | MR | 40.00 | 44.40 | 49.07 | 1 | 64.5 | 9.3 | 5 |
| SMBJ43 | MS | 43.00 | 47.80 | 58.42 | 1 | 76.7 | 7.8 | 5 |
| SMBJ43A | MT | 43.00 | 47.80 | 52.83 | 1 | 69.4 | 8.6 | 5 |
| SMBJ45 | MU | 45.00 | 50.00 | 61.11 | 1 | 80.3 | 7.5 | 5 |
| SMBJ45A | MV | 45.00 | 50.00 | 55.26 | 1 | 72.7 | 8.3 | 5 |
| SMBJ48 | MW | 48.00 | 53.30 | 65.14 | 1 | 85.5 | 7.0 | 5 |
| SMBJ48A | MX | 48.00 | 53.30 | 58.91 | 1 | 77.4 | 7.7 | 5 |
| SMBJ51 | MY | 51.00 | 56.70 | 69.30 | 1 | 91.1 | 6.6 | 5 |
| SMBJ51A | MZ | 51.00 | 56.70 | 62.67 | 1 | 82.4 | 7.3 | 5 |
| SMBJ54 | ND | 54.00 | 60.00 | 73.33 | 1 | 96.3 | 6.2 | 5 |
| SMBJ54A | NE | 54.00 | 60.00 | 66.32 | 1 | 87.1 | 6.9 | 5 |
| SMBJ58 | NF | 58.00 | 64.40 | 78.71 | 1 | 103.0 | 5.8 | 5 |
| SMBJ58A | NG | 58.00 | 64.40 | 71.18 | 1 | 93.6 | 6.4 | 5 |
| SMBJ60 | NH | 60.00 | 66.70 | 81.52 | 1 | 107.0 | 5.6 | 5 |
| SMBJ60A | NK | 60.00 | 66.70 | 73.72 | 1 | 96.8 | 6.2 | 5 |
| SMBJ64 | NL | 64.00 | 71.10 | 86.90 | 1 | 114.0 | 5.3 | 5 |
| SMBJ64A | NM | 64.00 | 71.10 | 78.58 | 1 | 103.0 | 5.8 | 5 |
| SMBJ70 | NN | 70.00 | 77.80 | 95.09 | 1 | 125.0 | 4.8 | 5 |
| SMBJ70A | NP | 70.00 | 77.80 | 85.99 | 1 | 113.0 | 5.3 | 5 |
| SMBJ75 | NQ | 75.00 | 83.30 | 101.81 | 1 | 134.0 | 4.5 | 5 |
| SMBJ75A | NR | 75.00 | 83.30 | 92.07 | 1 | 121.0 | 4.9 | 5 |
| SMBJ78 | NS | 78.00 | 86.70 | 105.97 | 1 | 139.0 | 4.3 | 5 |
| SMBJ78A | NT | 78.00 | 86.70 | 95.83 | 1 | 126.0 | 4.7 | 5 |
| SMBJ85 | NU | 85.00 | 94.40 | 115.38 | 1 | 151.0 | 3.9 | 5 |
| SMBJ85A | NV | 85.00 | 94.40 | 104.34 | 1 | 137.0 | 4.4 | 5 |
| SMBJ90 | NW | 90.00 | 100.00 | 122.22 | 1 | 160.0 | 3.8 | 5 |
| SMBJ90A | NX | 90.00 | 100.00 | 110.53 | 1 | 146.0 | 4.1 | 5 |
| SMBJ100 | NY | 100.00 | 111.00 | 135.67 | 1 | 179.0 | 3.4 | 5 |
| SMBJ100A | NZ | 100.00 | 111.00 | 122.68 | 1 | 162.0 | 3.7 | 5 |
| SMBJ110 | PD | 110.00 | 122.00 | 149.11 | 1 | 196.0 | 3.0 | 5 |
| SMBJ110A | PE | 110.00 | 122.00 | 134.84 | 1 | 177.0 | 3.4 | 5 |
| SMBJ120 | PF | 120.00 | 133.00 | 162.56 | 1 | 214.0 | 2.8 | 5 |
| SMBJ120A | PG | 120.00 | 133.00 | 147.00 | 1 | 193.0 | 3.1 | 5 |
| SMBJ130 | PH | 130.00 | 144.00 | 176.00 | 1 | 231.0 | 2.6 | 5 |
| SMBJ130A | PK | 130.00 | 144.00 | 159.16 | 1 | 209.0 | 2.9 | 5 |
| SMBJ150 | PL | 150.00 | 167.00 | 204.11 | 1 | 269.0 | 2.2 | 5 |
| SMBJ150A | PM | 150.00 | 167.00 | 184.58 | 1 | 243.0 | 2.5 | 5 |
| SMBJ160 | PN | 160.00 | 178.00 | 217.56 | 1 | 287.0 | 2.1 | 5 |
| SMBJ160A | PP | 160.00 | 178.00 | 196.74 | 1 | 259.0 | 2.3 | 5 |
| SMBJ170 | PQ | 170.00 | 189.00 | 231.00 | 1 | 304.0 | 2.0 | 5 |
| SMBJ170A | PR | 170.00 | 189.00 | 208.89 | 1 | 275.0 | 2.2 | 5 |

BI-DIRECTIONAL 600 WATT SURFACE MOUNT TVS

| BI-DIRECTIONAL PART NO. | DEVICE MARKING CODE | REVERSE STAND-OFF VOLTAGE VRWM (V) | BREAKDOWN VOLTAGE VBR (V) MIN. @IT | BREAKDOWN VOLTAGE VBR (V) MAX. @IT | TEST CURRENT IT (mA) | MAXIMUM CLAMPING VOLTAGE @Ipp Vc (V) | PEAK PULSE CURRENT Ipp (A) | REVERSE LEAKAGE @VRWM IR (uA) |
|-------------------------|---------------------|------------------------------------|------------------------------------|------------------------------------|----------------------|--------------------------------------|----------------------------|-------------------------------|
| SMBJ5.0C | AD | 5.00 | 6.40 | 7.82 | 10 | 9.6 | 62.5 | 1600 |
| SMBJ5.0CA | AE | 5.00 | 6.40 | 7.07 | 10 | 9.2 | 65.2 | 1600 |
| SMBJ6.0C | AF | 6.00 | 6.67 | 8.15 | 10 | 11.4 | 52.6 | 1600 |
| SMBJ6.0CA | AG | 6.00 | 6.67 | 7.37 | 10 | 10.3 | 58.3 | 1600 |
| SMBJ6.5C | AH | 6.50 | 7.22 | 8.82 | 10 | 12.3 | 48.7 | 1000 |
| SMBJ6.5CA | AK | 6.50 | 7.22 | 7.98 | 10 | 11.2 | 53.6 | 1000 |
| SMBJ7.0C | AL | 7.00 | 7.78 | 9.51 | 10 | 13.3 | 45.1 | 400 |
| SMBJ7.0CA | AM | 7.00 | 7.78 | 8.60 | 10 | 12.0 | 50.0 | 400 |
| SMBJ7.5C | AN | 7.50 | 8.33 | 10.18 | 1 | 14.3 | 42.0 | 200 |
| SMBJ7.5CA | AP | 7.50 | 8.33 | 9.21 | 1 | 12.9 | 46.5 | 200 |
| SMBJ8.0C | AQ | 8.00 | 8.99 | 10.99 | 1 | 15.0 | 40.0 | 100 |
| SMBJ8.0CA | AR | 8.00 | 8.99 | 9.94 | 1 | 13.6 | 44.1 | 100 |
| SMBJ8.5C | AS | 8.50 | 9.44 | 11.54 | 1 | 15.9 | 37.7 | 20 |
| SMBJ8.5CA | AT | 8.50 | 9.44 | 10.43 | 1 | 14.4 | 41.7 | 20 |
| SMBJ9.0C | AU | 9.00 | 10.00 | 12.22 | 1 | 16.9 | 35.5 | 10 |
| SMBJ9.0CA | AV | 9.00 | 10.00 | 11.05 | 1 | 15.4 | 39.0 | 10 |
| SMBJ10C | AW | 10.00 | 11.10 | 13.57 | 1 | 18.8 | 31.9 | 5 |
| SMBJ10CA | AX | 10.00 | 11.10 | 12.27 | 1 | 17.0 | 35.3 | 5 |
| SMBJ11C | AY | 11.00 | 12.20 | 14.91 | 1 | 20.1 | 29.9 | 5 |
| SMBJ11CA | AZ | 11.00 | 12.20 | 13.48 | 1 | 18.2 | 33.0 | 5 |
| SMBJ12C | BD | 12.00 | 13.30 | 16.26 | 1 | 22.0 | 27.3 | 5 |
| SMBJ12CA | BE | 12.00 | 13.30 | 14.70 | 1 | 19.9 | 30.2 | 5 |
| SMBJ13C | BF | 13.00 | 14.40 | 17.60 | 1 | 23.8 | 25.2 | 5 |
| SMBJ13CA | BG | 13.00 | 14.40 | 15.92 | 1 | 21.5 | 27.9 | 5 |
| SMBJ14C | BH | 14.00 | 15.60 | 19.07 | 1 | 25.8 | 23.3 | 5 |
| SMBJ14CA | BK | 14.00 | 15.60 | 17.24 | 1 | 23.2 | 25.8 | 5 |
| SMBJ15C | BL | 15.00 | 16.70 | 20.41 | 1 | 26.9 | 22.3 | 5 |
| SMBJ15CA | BM | 15.00 | 16.70 | 18.46 | 1 | 24.4 | 24.0 | 5 |
| SMBJ16C | BN | 16.00 | 17.80 | 21.76 | 1 | 28.8 | 20.8 | 5 |
| SMBJ16CA | BP | 16.00 | 17.80 | 19.67 | 1 | 26.0 | 23.1 | 5 |
| SMBJ17C | BQ | 17.00 | 18.90 | 23.10 | 1 | 30.5 | 19.7 | 5 |
| SMBJ17CA | BR | 17.00 | 18.90 | 20.89 | 1 | 27.6 | 21.7 | 5 |
| SMBJ18C | BS | 18.00 | 20.00 | 24.44 | 1 | 32.2 | 18.6 | 5 |
| SMBJ18CA | BT | 18.00 | 20.00 | 22.11 | 1 | 29.2 | 20.5 | 5 |
| SMBJ20C | BU | 20.00 | 22.20 | 27.13 | 1 | 35.8 | 16.7 | 5 |
| SMBJ20CA | BV | 20.00 | 22.20 | 24.54 | 1 | 32.4 | 18.5 | 5 |
| SMBJ22C | BW | 22.00 | 24.40 | 29.82 | 1 | 39.4 | 15.2 | 5 |
| SMBJ22CA | BX | 22.00 | 24.40 | 26.97 | 1 | 35.5 | 16.9 | 5 |
| SMBJ24C | BY | 24.00 | 26.70 | 32.63 | 1 | 43.0 | 14.0 | 5 |
| SMBJ24CA | BZ | 24.00 | 26.70 | 29.51 | 1 | 38.9 | 15.4 | 5 |
| SMBJ26C | CD | 26.00 | 28.90 | 35.32 | 1 | 46.6 | 12.4 | 5 |
| SMBJ26CA | CE | 26.00 | 28.90 | 31.94 | 1 | 42.1 | 14.2 | 5 |
| SMBJ28C | CF | 28.00 | 31.10 | 38.01 | 1 | 50.0 | 12.0 | 5 |
| SMBJ28CA | CG | 28.00 | 31.10 | 34.37 | 1 | 45.4 | 13.2 | 5 |
| SMBJ30C | CH | 30.00 | 33.30 | 40.70 | 1 | 53.5 | 11.2 | 5 |
| SMBJ30CA | CK | 30.00 | 33.30 | 36.81 | 1 | 48.4 | 12.4 | 5 |
| SMBJ33C | CL | 33.00 | 36.70 | 44.86 | 1 | 59.0 | 10.2 | 5 |
| SMBJ33CA | CM | 33.00 | 36.70 | 40.56 | 1 | 53.3 | 13.2 | 5 |
| SMBJ36C | CN | 36.00 | 40.00 | 48.89 | 1 | 64.3 | 9.3 | 5 |
| SMBJ36CA | CP | 36.00 | 40.00 | 44.21 | 1 | 58.1 | 10.3 | 5 |
| SMBJ40C | CQ | 40.00 | 44.40 | 54.27 | 1 | 71.4 | 8.4 | 5 |
| SMBJ40CA | CR | 40.00 | 44.40 | 49.07 | 1 | 64.5 | 9.3 | 5 |
| SMBJ43C | CS | 43.00 | 47.80 | 58.42 | 1 | 76.7 | 7.8 | 5 |
| SMBJ43CA | CT | 43.00 | 47.80 | 52.83 | 1 | 69.4 | 8.6 | 5 |
| SMBJ45C | CU | 45.00 | 50.00 | 61.11 | 1 | 80.3 | 7.5 | 5 |
| SMBJ45CA | CV | 45.00 | 50.00 | 55.26 | 1 | 72.7 | 8.3 | 5 |
| SMBJ48C | CW | 48.00 | 53.30 | 65.14 | 1 | 85.5 | 7.0 | 5 |
| SMBJ48CA | CX | 48.00 | 53.30 | 58.91 | 1 | 77.4 | 7.7 | 5 |
| SMBJ51C | CY | 51.00 | 56.70 | 69.30 | 1 | 91.1 | 6.6 | 5 |
| SMBJ51CA | CZ | 51.00 | 56.70 | 62.67 | 1 | 82.4 | 7.3 | 5 |
| SMBJ54C | DD | 54.00 | 60.00 | 73.33 | 1 | 96.3 | 6.2 | 5 |
| SMBJ54CA | DE | 54.00 | 60.00 | 66.32 | 1 | 87.1 | 6.9 | 5 |
| SMBJ58C | DF | 58.00 | 64.40 | 78.71 | 1 | 103.0 | 5.8 | 5 |
| SMBJ58CA | DG | 58.00 | 64.40 | 71.18 | 1 | 93.6 | 6.4 | 5 |
| SMBJ60C | DH | 60.00 | 66.70 | 81.52 | 1 | 107.0 | 5.6 | 5 |
| SMBJ60CA | DK | 60.00 | 66.70 | 73.72 | 1 | 96.8 | 6.2 | 5 |
| SMBJ64C | DL | 64.00 | 71.10 | 86.90 | 1 | 114.0 | 5.3 | 5 |
| SMBJ64CA | DM | 64.00 | 71.10 | 78.58 | 1 | 103.0 | 5.8 | 5 |
| SMBJ70C | DN | 70.00 | 77.80 | 95.09 | 1 | 125.0 | 4.8 | 5 |
| SMBJ70CA | DP | 70.00 | 77.80 | 85.99 | 1 | 113.0 | 5.3 | 5 |
| SMBJ75C | DQ | 75.00 | 83.30 | 101.81 | 1 | 134.0 | 4.5 | 5 |
| SMBJ75CA | DR | 75.00 | 83.30 | 92.07 | 1 | 121.0 | 4.9 | 5 |
| SMBJ78C | DS | 78.00 | 86.70 | 105.97 | 1 | 139.0 | 4.3 | 5 |
| SMBJ78CA | DT | 78.00 | 86.70 | 95.83 | 1 | 126.0 | 4.7 | 5 |
| SMBJ85C | DU | 85.00 | 94.40 | 115.38 | 1 | 151.0 | 3.9 | 5 |
| SMBJ85CA | DV | 85.00 | 94.40 | 104.34 | 1 | 137.0 | 4.4 | 5 |
| SMBJ90C | DW | 90.00 | 100.00 | 122.22 | 1 | 160.0 | 3.8 | 5 |
| SMBJ90CA | DX | 90.00 | 100.00 | 110.53 | 1 | 146.0 | 4.1 | 5 |
| SMBJ100C | DY | 100.00 | 111.00 | 135.67 | 1 | 179.0 | 3.4 | 5 |
| SMBJ100CA | DZ | 100.00 | 111.00 | 122.68 | 1 | 162.0 | 3.7 | 5 |
| SMBJ110C | ED | 110.00 | 122.00 | 149.11 | 1 | 196.0 | 3.0 | 5 |
| SMBJ110CA | EE | 110.00 | 122.00 | 134.84 | 1 | 177.0 | 3.4 | 5 |
| SMBJ120C | EF | 120.00 | 133.00 | 162.56 | 1 | 214.0 | 2.8 | 5 |
| SMBJ120CA | EG | 120.00 | 133.00 | 147.00 | 1 | 193.0 | 3.1 | 5 |
| SMBJ130C | EH | 130.00 | 144.00 | 176.00 | 1 | 231.0 | 2.6 | 5 |
| SMBJ130CA | EK | 130.00 | 144.00 | 159.16 | 1 | 209.0 | 2.9 | 5 |
| SMBJ150C | EL | 150.00 | 167.00 | 204.11 | 1 | 269.0 | 2.2 | 5 |
| SMBJ150CA | EM | 150.00 | 167.00 | 184.58 | 1 | 243.0 | 2.5 | 5 |
| SMBJ160C | EN | 160.00 | 178.00 | 217.56 | 1 | 287.0 | 2.1 | 5 |
| SMBJ160CA | EP | 160.00 | 178.00 | 196.74 | 1 | 259.0 | 2.3 | 5 |
| SMBJ170C | EQ | 170.00 | 189.00 | 231.00 | 1 | 304.0 | 2.0 | 5 |
| SMBJ170CA | ER | 170.00 | 189.00 | 208.89 | 1 | 275.0 | 2.2 | 5 |

SENSITRON

SEMICONDUCTOR

DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.