


**PLANAR DIODES**

**DO-35 Case**

Type	Peak Inverse Voltage	Minimum Forward Current		Maximum Reverse Current			Maximum Capacitance	Maximum Reverse Recovery Time @ 10 mA	Dissipation
				@ 25°C		@ 150°C			
				$I_r$	$I_r$	$V_r$			
PIV	$I_f$ @ $V_f$	$I_r$	$I_r$	$V_r$	C @ 0V	$t_{rr}$ @ $I_f$	P		
V	mA V	$\mu A$	$\mu A$	V	pf	ns	mW		
1N456	30	40 @ 1	.025	5	25	—	—	250	
1N456A	30	100 @ 1	.025	5	25	—	—	250	
1N457	70	20 @ 1	.025	5	60	—	—	250	
1N457A	70	100 @ 1	.025	5	60	—	—	250	
1N458	150	7 @ 1	.025	5	125	—	—	250	
1N458A	150	100 @ 1	.025	5	125	—	—	250	
1N458B	80	100 @ 1	.025	5	60	—	—	250	
1N619	30	3 @ 1	.080	16 @ 100°C	10	—	—	—	
1N890	60	20 @ 1	.025	50	20	10 Typ	—	250	
1N914	100	10 @ 1	.025	50	20	4 Typ	4	—	
1N3062	75	20 @ 1	.100	100	50	1	2	—	
1N3064	75	10 @ 1	.100	100	50	2	4	250	
1N3147	60	100 @ 1	.100	20 @ 100°C	30	—	—	600	
1N3600	50	200 @ 1	.100	100	50	2.5	4 @ 2 mA	—	
1N3602	50	20 @ 1	.100	100	50	3	5	—	
1N3605	40	0.1 @ 0.55	.050	50	50	2	4	—	
1N4009	25	30 @ 1	.100	100	25	4	2	—	
1N4148	75	10 @ 1	.025	50	20	4	4	500	
1N4149	75	10 @ 1	.025	50	20	2	—	500	
1N4150	50	200 @ 1	.100	100	50	2.5	6 @ 2 mA	400	

**DO-35 Case**

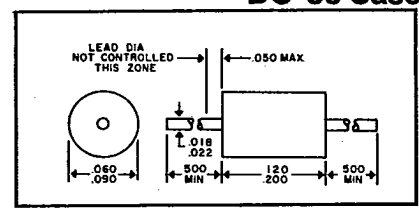

American Power Devices offers a broad line of silicon planar switching diodes featuring nanosecond switching, with high forward conductance, low leakage current and low capacitance. Switching speeds are as low as 2ns with peak inverse voltages up to 150V. They are available in DO-35 cases.

All silicon planar diodes are manufactured in double plug packages making the devices rugged and highly reliable.

Applications for these switching diodes are in data processing equipment in such areas as logic circuits, memory core driving, pulse circuitry, and other high speed switching applications.

**DO-35 Case**

Type	Peak Inverse Voltage	Minimum Forward Current		Maximum Reverse Current			Maximum Capacitance	Maximum Reverse Recovery Time @ 10 mA	Dissipation
				@ 25°C		@ 150°C			
				$I_r$	$I_r$	$V_r$			
PIV	$I_f$ @ $V_f$	$I_r$	$I_r$	$V_r$	C @ 0V	$t_{rr}$ @ $I_f$	P		
V	mA V	$\mu A$	$\mu A$	V	pf	ns	mW		
1N4151	75	50 @ 1	.050	50	50	2	—	400	
1N4152	40	20 @ .88	.050	50	30	2	4	400	
1N4153	75	20 @ .88	.050	50	50	2	4	400	
1N4154	35	30 @ 1	.100	100	25	4	4	400	
1N4305	75	10 @ .85	.100	100	50	2	4	400	
1N4446	100	20 @ 1	.025	50	20	4	4	250	
1N4447	100	20 @ 1	.025	50	20	2	4	250	
1N4448	75	100 @ 1	.025	50	20	4	4	250	
1N4449	75	30 @ 1	.025	50	20	2	4	250	
1N4450	30	1 @ .64	.050	50	30	4	4	—	
1N4451	50	50 @ 1	.050	50	50	2	2	—	
1N4452	30	1 @ .62	.050	50	30	3	5	—	
1N4454	75	10 @ 1	.100	100	50	2	4	500	
1N4531	100	10 @ 1	.025	50	20	4	4	—	
1N4534	50	10 @ .81	.050	50	50	2	2	—	
1N4606	85	250 @ 1.1	.100	25 @ 100°C	50	2.5	6	500	
1N4607	85	400 @ 1.1	.100	25 @ 100°C	50	4	10	—	
1N4608	85	500 @ 1.1	.100	25 @ 100°C	50	4	10	—	
1N4727	30	10 @ .85	.100	10 @ 100°C	20	4	4	—	
1N4861	40	100 @ 1.2	.002	4	30	3.5	1000	—	
1N4862	70	100 @ 1.1	.005	10	50	3.3	1000	—	
1N5194	80	100 @ 1	.025	5	70	—	—	250	
1N5208	70	20 @ 1	.025	5	60	—	—	200	
1N5209	150	7 @ 1	.025	5	125	—	—	200	
1N5282	80	100 @ .9	—	—	—	2.5	4	—	
AP5317	80	300 @ 1.1	.10	100	55	2.5	4	—	
1N5426	25	40 @ 1	1.00	—	6	1.1	—	200	
1N5605	70	20 @ 1	.025	5	60	—	—	250	
APD3595	150	100 @ 1	.001	0.5 @ 125°C	125	8	—	500	

**DO-35 Case**

