



NPN High Power Silicon Transistors

2N6249, 2N6250, 2N6251

Features

- Available in JAN, JANTX, and JANTXV per MIL-PRF-19500/371
- TO-3 (TO-204AA) Package



Maximum Ratings

Ratings	Symbol	2N6249	2N6250	2N6251	Units
Collector - Emitter Voltage	V_{CEO}	200	275	350	Vdc
Collector - Base Voltage	V_{CBO}	300	375	450	Vdc
Emitter - Base Voltage	V_{EBO}	6.0			Vdc
Collector Current	I_C	10			Adc
Base Current	I_B	5.0			Adc
Total Power Dissipation @ $T_A = +25\text{ }^\circ\text{C}$ (1) @ $T_A = +25\text{ }^\circ\text{C}$ (2)	P_T	6.0			W
		175			W
Operating & Storage Temperature Range	T_{OP}, T_{stg}	-65 to +200			$^\circ\text{C}$

Thermal Characteristics

Characteristics	Symbol	Maximum	Units
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.25	$^\circ\text{C}/\text{W}$

1) Derate linearly @ 34.2 mW/ $^\circ\text{C}$ for $T_A > +25\text{ }^\circ\text{C}$


2) Derate linearly @ 1.0 mW/ $^\circ\text{C}$ for $T_C > +75\text{ }^\circ\text{C}$

Electrical Characteristics

OFF Characteristics	Symbol	Minimum	Maximum	Units	
Collector-Emitter Breakdown Voltage $I_C = 20\text{ mAdc}, L = 42\text{ mH}, f = 30\text{-}60\text{ GHz}$ (See Figure 10 of MIL-PRF-19500/510)	2N6249 2N6250 2N6251	$I_{(BR)CEO}$	---	200 275 350	Vdc
Collector-Emitter Breakdown Voltage $I_C = 200\text{ mAdc}, L = 14\text{ mH}, f = 30\text{-}60\text{ GHz}$ (See Figure 10 of MIL-PRF-19500/510)	2N6249 2N6250 2N6251	$I_{(BR)CER}$	---	225 300 375	Vdc
Emitter-Base Cutoff Current $V_{EB} = 6.0\text{ Vdc}$		I_{EBO}	---	100	μAdc
Collector-Emitter Cutoff Current $V_{CE} = 150\text{ Vdc}$ $V_{CE} = 225\text{ Vdc}$ $V_{CE} = 225\text{ Vdc}$	2N6249 2N6250 2N6251	I_{CEO}	---	1.0	mAdc
Collector-Emitter Cutoff Current $V_{CE} = 225\text{ Vdc}, V_{BE} = -1.5\text{ Vdc}$ $V_{CE} = 300\text{ Vdc}, V_{BE} = -1.5\text{ Vdc}$ $V_{CE} = 375\text{ Vdc}, V_{BE} = -1.5\text{ Vdc}$	2N6249 2N6250 2N6251	I_{CEX}	---	100	μAdc



Outline Drawing

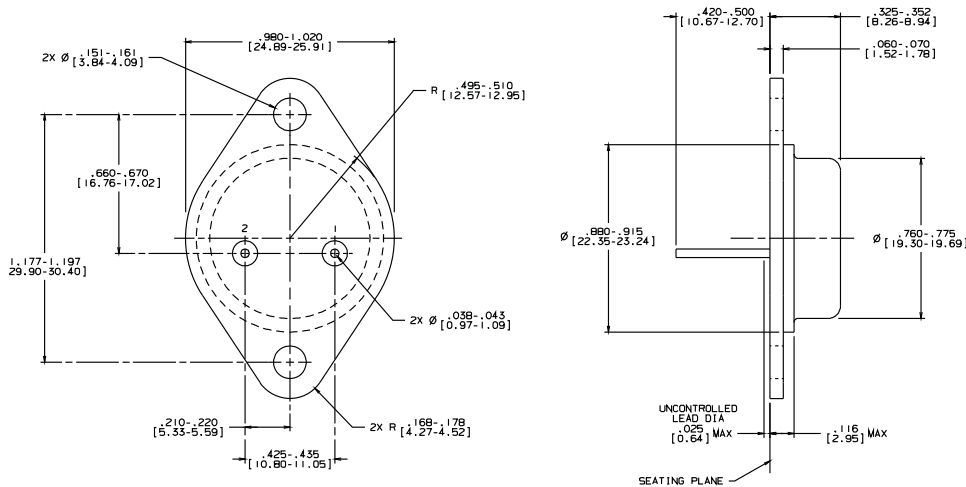

- NOTES:
1. STANDARD HEADER TYPE SOLID BASE.
 2. STANDARD LEAD FINISH PER MIL-M-58510 TYPE X OR EQUIVALENT.
 3. LEAD NOT BENT GREATER THAN 15°.
 4. DIMENSIONS BASED ON JEDEC STANDARD TO-3 PUBLICATION 95, PA

Aeroflex / Metelics, Inc.

975 Stewart Drive,
Sunnyvale, CA 94085
Tel: (408) 737-8181
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

Hi-Rel Components

9 Hampshire Street,
Lawrence, MA 01840
Tel: (603) 641-3800
Fax: (978) 683-3264

www.aeroflex.com/metelics-hirelcomponents

www.aeroflex.com/metelics metelics-sales@aeroflex.com

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2012 Aeroflex / Metelics. All rights reserved.

ISO 9001: 2008 certified companies



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.