



JAN Qualified N-Channel 60-V (D-S) MOSFETs

PRODUCT SUMMARY			
$V_{(BR)DSS}$ Min (V)	$r_{DS(on)}$ Max (Ω)	$V_{GS(th)}$ (V)	I_D (A)
60	3 @ $V_{GS} = 10$ V	0.8 to 2	0.99

FEATURES

- Military Qualified
- Low On-Resistance: 1.3 Ω
- Low Threshold: 1.7 V
- Low Input Capacitance: 35 pF
- Fast Switching Speed: 8 ns
- Low Input and Output Leakage


BENEFITS

- Guaranteed Reliability
- Low Offset Voltage
- Low-Voltage Operation
- Easily Driven Without Buffer
- High-Speed Circuits
- Low Error Voltage


APPLICATIONS

- Military Applications
- Direct Logic-Level Interface: TTL/CMOS
- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories, Transistors, etc.
- Battery Operated Systems
- Solid-State Relays

Datasheet.Live

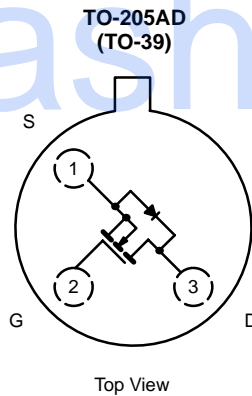

Device Marking
Side View



"S" = Siliconix Logo
f = Factory Code
// = Lot Traceability
xxyy = Date Code

*Note: or JANTX2N6660
JANTXV2N6660

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)			
Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current ($T_J = 150^\circ\text{C}$)	I_D	$T_C = 25^\circ\text{C}$	A
		$T_C = 100^\circ\text{C}$	
Pulsed Drain Current ^a	I_{DM}	3	
Power Dissipation	P_D	$T_C = 25^\circ\text{C}$	W
		$T_A = 25^\circ\text{C}$	
Thermal Resistance, Junction-to-Ambient ^b	R_{thJA}	170	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	R_{thJC}	20	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

Notes

- a. Pulse width limited by maximum junction temperature.
- b. Not required by Military Spec.



SPECIFICATIONS ^a							
Parameter	Symbol	Test Conditions	Limits			Unit	
			Min	Typ ^b	Max		
Static							
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = 10\text{ }\mu\text{A}$	60	75		V	
Gate-Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 1\text{ mA}$		0.8	1.7		2
			$T_C = -55^\circ\text{C}$				2.5
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$				± 100	
			$T_C = 125^\circ\text{C}$			± 500	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 48\text{ V}, V_{GS} = 0\text{ V}$				1	
			$T_C = 125^\circ\text{C}$			100	
On-State Drain Current ^c	$I_{D(on)}$	$V_{DS} = 10\text{ V}, V_{GS} = 10\text{ V}$		2		A	
Drain-Source On-Resistance ^c	$r_{DS(on)}$	$V_{GS} = 5\text{ V}, I_D = 0.3\text{ A}$		2	5	Ω	
			$V_{GS} = 10\text{ V}, I_D = 1\text{ A}$		1.3		3
			$T_C = 125^\circ\text{C}$		2.4		5.6
Forward Transconductance ^c	g_{fs}	$V_{DS} = 7.5\text{ V}, I_D = 0.525\text{ A}$	170	350		mS	
Diode Forward Voltage	V_{SD}	$I_S = 0.99\text{ A}, V_{GS} = 0\text{ V}$	0.7	0.8	1.6	V	
Dynamic							
Input Capacitance	C_{iss}	$V_{DS} = 25\text{ V}, V_{GS} = 0\text{ V}$ $f = 1\text{ MHz}$		35	50	pF	
Output Capacitance	C_{oss}			25	40		
Reverse Transfer Capacitance	C_{rss}			7	10		
Drain-Source Capacitance	C_{ds}			30			
Switching^d							
Turn-On Time	t_{ON}	$V_{DD} = 25\text{ V}, R_L = 23\text{ }\Omega$ $I_D \cong 1\text{ A}, V_{GEN} = 10\text{ V}$ $R_G = 25\text{ }\Omega$		8	10	ns	
Turn-Off Time	t_{OFF}			8.5	10		

Notes

- a. $T_A = 25^\circ\text{C}$ unless otherwise noted.
- b. For DESIGN AID ONLY, not subject to production testing.
- c. Pulse test: $PW \leq 300\text{ }\mu\text{s}$ duty cycle $\leq 2\%$.
- d. Switching time is essentially independent of operating temperature.
- e. For typical characteristics curves see the 2N6659/2N6660, VQ1004J/P data sheet.

VNDQ06



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.