



SYNSEMI SEMICONDUCTOR

RL201G thru RL207G

2.0 Amps. Glass Passivated Junction Rectifiers
Voltage Range 50 to 1000 Volts Forward Current 2.0 Amperes

Features


- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High reliability
- ◆ High surge current capability



DO-204AC (DO-15)

Mechanical Data

- ◆ Case: Molded plastic DO-204AC(DO-15)
- ◆ Epoxy: UL 94V-0 rate flame retardant
- ◆ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ◆ Polarity: Color band denotes cathode end
- ◆ High temperature soldering guaranteed:
250°C/10 seconds .375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ◆ Weight: 0.014 ounce, 0.395 gram

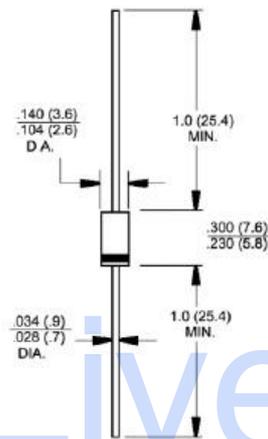

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbols	RL201G	RL202G	RL203G	RL204G	RL205G	RL206G	RL207G	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length @ $T_a=60^\circ\text{C}$	$I_{(AV)}$	2.0							Amps
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	55.0							Amps
Maximum instantaneous forward voltage @ 2.0A	V_F	1.1							Volts
Maximum DC reverse current @ $T_a=25^\circ\text{C}$ at rated DC blocking voltage @ $T_a=125^\circ\text{C}$	I_R	5.0 100							μA
Typical junction capacitance (Note 1)	C_j	30							pF
Operating and storage temperature range	$T_{J, T_{STG}}$	-65 to +150							$^\circ\text{C}$

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

RL201G thru RL207G

RATINGS AND CHARACTERISTIC CURVES

FIG. 1- TYPICAL FORWARD CHARACTERISTICS

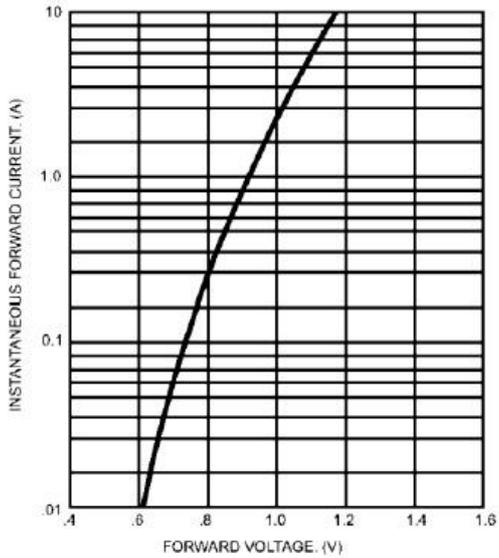


FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

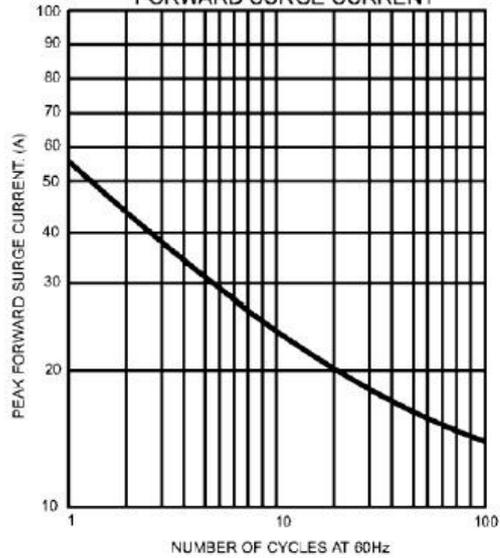


FIG. 3- MAXIMUM FORWARD CURRENT DERATING CURVE

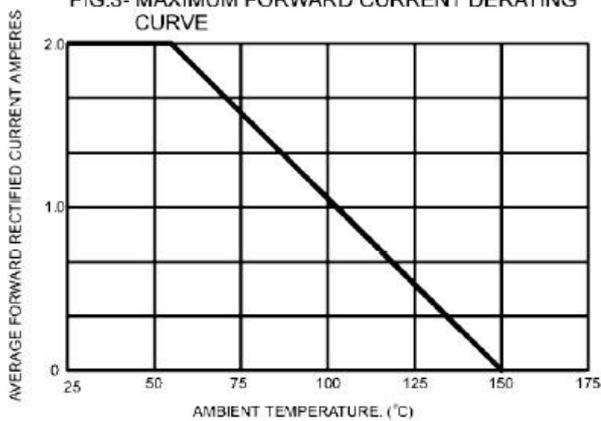


FIG. 4- TYPICAL JUNCTION CAPACITANCE

