


# 36-75 Vdc DC/DC converter Output up to 30 A/90 W

## Contents

Product Program . . . . .	2
Mechanical Information . . . . .	3
Absolute Maximum Ratings . . . . .	4
Input . . . . .	4
Product Qualification Specification . . . . .	5
Safety Specification . . . . .	6
PKB 4318 PIOBNB – 1.2 V Data . . . . .	7
PKB 4418 PIOANB – 1.5 V Data . . . . .	10
PKB 4418 PINB - 1.8 V Data . . . . .	13
PKB 4619 PINB – 2.5 V Data . . . . .	16
PKB 4610 PINB – 3.3 V Data . . . . .	19
PKB 4810 PINB – 3.3 V Data . . . . .	22
PKB 4711 PINB – 5 V Data . . . . .	25
PKB 4713 PINB – 12 V Data . . . . .	28
PKB 4913 PINB – 12 V Data . . . . .	31
PKB 4715 PINB - 15 V Data . . . . .	34
EMC Specification . . . . .	37
Operating Information . . . . .	38
Thermal Consideration . . . . .	40
Soldering Information . . . . .	41
Delivery Package Information . . . . .	41
Compatibility with RoHS requirements . . . . .	41
Reliability . . . . .	41
Quality Statement . . . . .	41
Limitation of Liability . . . . .	41
Sales Offices and Contact Information . . . . .	42

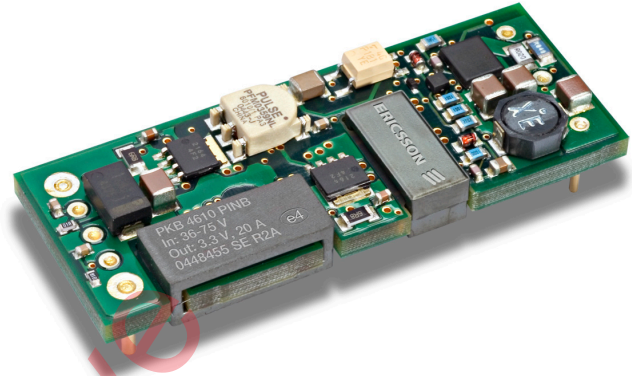

Safety Approvals



## Key Features

- Industry standard Eighth-brick 58.40 x 22.70 x 8.10 mm (2.300 x 0.896 x 0.319 in.)
- RoHS compliant
- High efficiency, typ. 91.5 % at 3.3 Vout half load
- 2250 Vdc input to output isolation.
- Meets isolation requirements equivalent to basic insulation according to IEC/EN/UL 60950
- More than 3.5 million hours predicted MTBF at +40 °C ambient temperature

The PKB series of high efficiency DC/DC converters are designed to provide high quality on-board power solutions in distributed power architectures used in Internet-working equipment in wireless and wired communications applications. The PKB 4000 series has industry standard footprint and pin-out and is max 8.10 mm (0.319 in) high. This makes it extremely well suited for narrow board pitch applications with board spacing down to 15 mm (0.6 in). Included as standard features are output over-voltage protection, input under-voltage protection, over tempera-

ture protection, soft-start, output short circuit protection, remote sense, remote control and output voltage adjust function.

These converters are designed to meet high reliability requirements and are manufactured in highly automated manufacturing lines and meet world-class quality levels.



Ericsson Power Modules is an ISO 9001/14001 certified supplier.

## Product Program

V <sub>I</sub>	V <sub>O</sub> /I <sub>O</sub> max	P <sub>O</sub> max	Ordering No.	Comment
	Output 1			
48/60 V	1.2 V/30 A	36 W	PKB 4318 PIOBNB	
	1.5 V/30 A	45 W	PKB 4418 PIOANB	
	1.8 V/25 A	45 W	PKB 4418 PINB	
	2.5 V/25 A	62.5 W	PKB 4619 PINB	
	3.3 V/20 A	66 W	PKB 4610 PINB	
	3.3 V/25 A	82.5 W	PKB 4810 PINB	
	5.0 V/15 A	75 W	PKB 4711 PINB	
	12 V/6 A	72 W	PKB 4713 PINB	
	12 V/7.5 A	90 W	PKB 4913 PINB	
	15 V/5 A	75 W	PKB 4715 PINB	
Option		Suffix	Example	
Positive Remote Control logic		P	PKB 4610 PIPNB	
Increased stand-off and height		M	PKB 4610 PINBM	
Lead length 3.69 mm (0.145 in)		LA	PKB 4610 PINBLA	
Lead length 4.57 mm (0.180 in)		LB	PKB 4610 PINBLB	


Note: As an example a positive logic, increased stand-off, short pin product would be PKB 4610 PIPNBMLA

# Mechanical Information

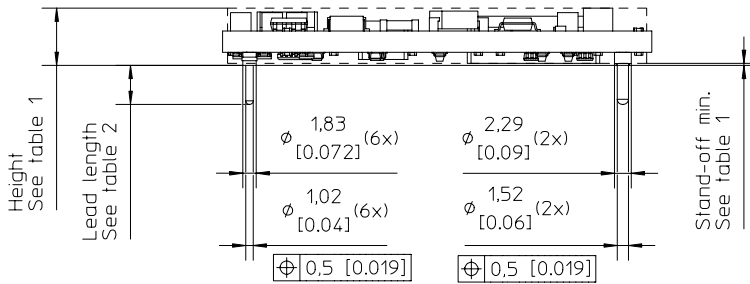

### Connections

Pin	Designation	Function
1	+In	Positiv input
2	RC	Remote control
3	-In	Negative input
4	-Out	Negative output
5	-Sen	Negative remote sense
6	Vadj	Output voltage adjust
7	+Sen	Positiv remote sense
8	+Out	Positiv output

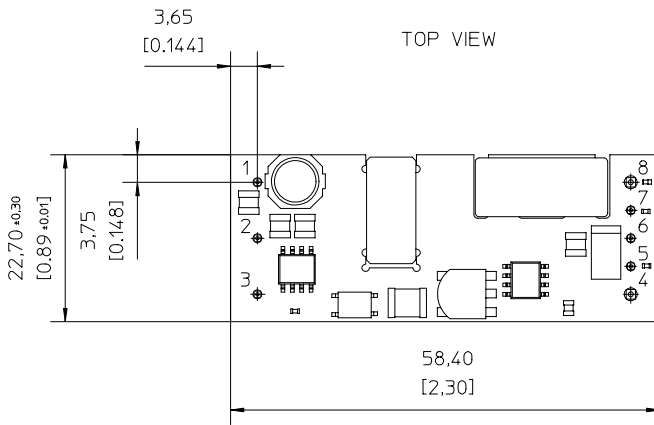


Recommended footprint - TOP VIEW

Table 1

Height option	Height max.	Stand-off min.
Standard	8,10 [0.319]	0,22 [0.008]
M	9,15 [0.360]	1,25 [0.049]

Table 2

Pin option	Lead Length
Standard	5,33 [0.210]
LA	3,69 [0.145]
LB	4,57 [0.180]

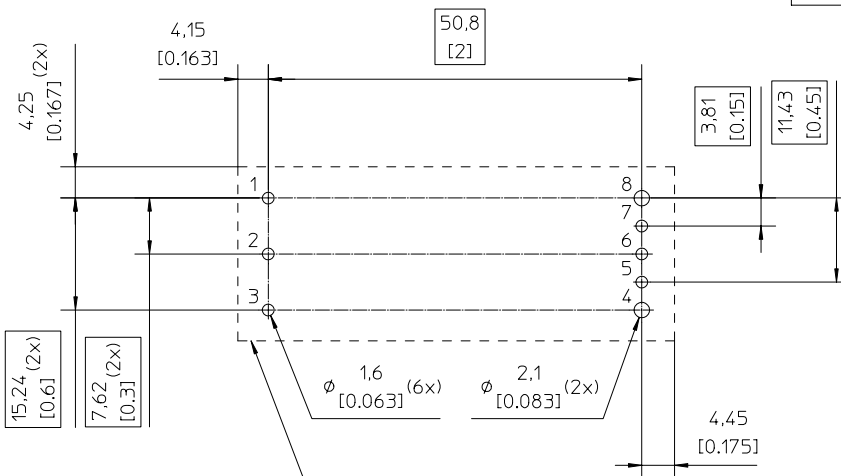

Recommended keep away area for user components.

Weight: Typical 20g

Pins:

Material, pins 1-3, 5-7: Brass

Material, pins 4, 8: Copper alloy

Plating: 0,1µm Gold over 2µm Nickel

All dimensions are in mm [inches]

Tolerances unless specified

x.x±0,5[0.02]

x.xx±0,25[0.01]

Not applied on the recommended footprint



## Absolute Maximum Ratings


Characteristics		min	typ	max	Unit
$T_{pcb}$	Maximum Operating Pcb Temperature (see Thermal Consideration section)	-40		+110	°C
$T_S$	Storage temperature	-55		+125	°C
$V_I$	Input voltage	-0.5		+80	Vdc
$V_{ISO}$	Isolation voltage (input to output test voltage)			2250	Vdc
$V_{tr}$	Input voltage transient ( $T_p$ 100 ms)			100	Vdc
$V_{RC}$	Negative logic (referenced to -In)			40	Vdc
	Positive logic (referenced to -In)	-0.5		6	Vdc
$V_{adj}$	Maximum input	-0.5		$2xV_{oi}$	Vdc

Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as no destruction limits, are normally tested with one parameter at a time exceeding the limits of Output data or Electrical Characteristics. If exposed to stress above these limits, function and performance may degrade in an unspecified manner.

**Input**  $T_{Pcb} < T_{Pcb\ max}$  unless otherwise specified

Characteristics		Conditions	min	typ	max	Unit
$V_I$	Input voltage range		36		75	Vdc
$V_{loff}$	Turn-off input voltage	Ramping from higher voltage	30	33.5	35	Vdc
$V_{lon}$	Turn-on input voltage	Ramping from lower voltage	32	34.5	36	Vdc
$C_I$	Input capacitance			2.18		$\mu F$
$P_{li}$	Input idling power	$I_o = 0, V_I = 53\ V$		3		W
$P_{RC}$	Input standby power (turned off with RC)	$V_I = 53\ V, RC$ activated		0.15		W

## Fundamental Circuit Diagram

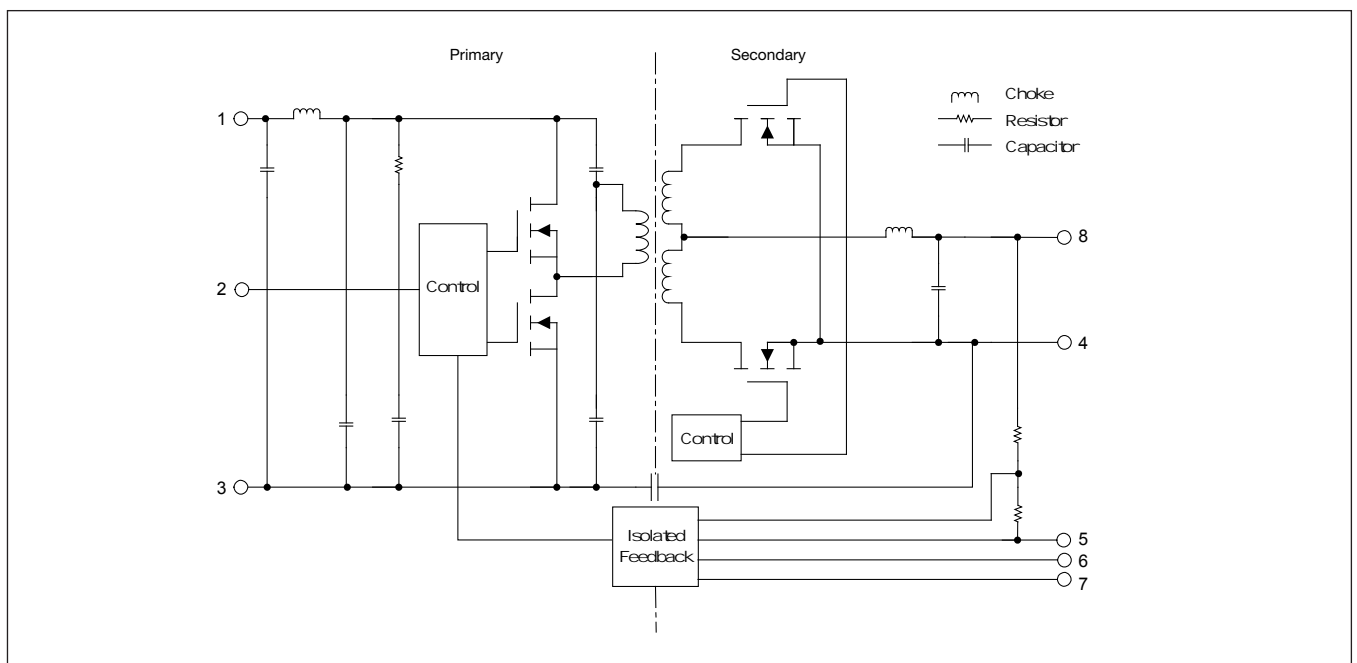

## Product Qualification Specification

Characteristics			
Random Vibration	IEC 68-2-64 F <sub>n</sub>	Frequency Spectral density Duration	5 ... 500 Hz 0.1 g <sup>2</sup> /Hz 10 min each of 3 directions
Mechanical shock (half sinus)	IEC 68-2-27 E <sub>a</sub>	Peak acceleration Duration Pulse shape	100 g 6 ms half sine
Temperature cycling	IEC 68-2-14 N <sub>a</sub>	Temperature Number of cycles	-40 ... +125 °C 300
Heat/Humidity	IEC 68-2-67 C <sub>y</sub>	Temperature Humidity Duration	+85 °C 85 % RH 1000 hours
Solder heat stability	IEC 68-2-20 T <sub>b</sub> 1A	Temperature, solder Duration	260 °C 10 ...13 s
Resistance to cleaning agents	IEC 68-2-45 XA Method 2	Water Isopropyl alcohol Glycol ether Method	+55 ±5 °C +35 ±5 °C +35 ±5 °C with rubbing
Storage test	IEC 68-2-2 B <sub>a</sub>	Temperature Duration	125 °C 1000 h
Cold (in operation)	IEC 68-2-1 A <sub>d</sub>	Temperature, T <sub>A</sub> Duration	-40 °C 2 h
Operational life test		Duration	1000 h

## Safety Specification

### General information.

Ericsson Power Modules DC/DC converters and DC/DC regulators are designed in accordance with safety standards IEC/EN/UL 60 950, *Safety of Information Technology Equipment*.

IEC/EN/UL60950 contains requirements to prevent injury or damage due to the following hazards:

- *Electrical shock*
- *Energy hazards*
- *Fire*
- *Mechanical and heat hazards*
- *Radiation hazards*
- *Chemical hazards*

On-board DC-DC converters are defined as component power supplies. As components they cannot fully comply with the provisions of any Safety requirements without "Conditions of Acceptability". It is the responsibility of the installer to ensure that the final product housing these components complies with the requirements of all applicable Safety standards and Directives for the final product.

Component power supplies for general use should comply with the requirements in IEC60950, EN60950 and UL60950 "Safety of information technology equipment".

There are other more product related standards, e.g. IEC61204-7 "Safety standard for power supplies", IEEE802.3af "Ethernet LAN/MAN Data terminal equipment power", and ETS300132-2 "Power supply interface at the input to telecommunications equipment; part 2: DC", but all of these standards are based on IEC/EN/UL60950 with regards to safety.

Ericsson Power Modules DC/DC converters and DC/DC regulators are UL 60 950 recognized and certified in accordance with EN 60 950.

The flammability rating for all construction parts of the products meets UL 94V-0.

The products should be installed in the end-use equipment, in accordance with the requirements of the ultimate application. Normally the output of the DC/DC converter is considered as SELV (Safety Extra Low Voltage) and the input source must be isolated by minimum Double or Reinforced Insulation from the primary circuit (AC mains) in accordance with IEC/EN/UL 60 950.

### Isolated DC/DC converters.

It is recommended that a fast blow fuse with a rating twice the maximum input current per selected product be used at the input of each DC/DC converter. If an input filter is used in the circuit the fuse should be placed in front of the input filter.

In the rare event of a component problem in the input filter or in the DC/DC converter that imposes a short circuit on the input source, this fuse will provide the following functions:

- Isolate the faulty DC/DC converter from the input power source so as not to affect the operation of other parts of the system.
- Protect the distribution wiring from excessive current and power loss thus preventing hazardous overheating.

The galvanic isolation is verified in an electric strength test. The test voltage ( $V_{ISO}$ ) between input and output is 1500 Vdc or 2250 Vdc for 60 seconds (refer to product specification). Leakage current is less than 1 $\mu$ A at nominal input voltage.

### 24 V dc systems.

The input voltage to the DC/DC converter is SELV (Safety Extra Low Voltage) and the output remains SELV under normal and abnormal operating conditions.

### 48 and 60 V dc systems.

If the input voltage to Ericsson Power Modules DC/DC converter is 75 V dc or less, then the output remains SELV (Safety Extra Low Voltage) under normal and abnormal operating conditions.

Single fault testing in the input power supply circuit should be performed with the DC/DC converter connected to demonstrate that the input voltage does not exceed 75 V dc.

If the input power source circuit is a DC power system, the source may be treated as a TNV2 circuit and testing has demonstrated compliance with SELV limits and isolation requirements equivalent to Basic Insulation in accordance with IEC/EN/UL 60 950.

### Non-isolated DC/DC regulators.

The input voltage to the DC/DC regulator is SELV (Safety Extra Low Voltage) and the output remains SELV under normal and abnormal operating conditions.

It is recommended that a slow blow fuse with a rating twice the maximum input current per selected product be used at the input of each DC/DC regulator.


## PKB 4318 PIOBNB – 1.2 V Data

$T_{Pcb} = -40...+90^{\circ}\text{C}$ ,  $V_I = 36...75\text{V}$ , sense pins connected to output pins unless otherwise specified.


Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O_i}$	Output voltage initial setting and accuracy	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	1.18	1.2	1.22	V
	Output adjust range	$I_O = I_{Omax}$ , $V_I = 53\text{V}$ , $T_{Pcb} = 25^{\circ}\text{C}$	1.08		1.32	V
$V_O$	Output voltage tolerance band	$I_O = 0.1...1 \times I_{Omax}$	1.16		1.23	V
	Idling voltage	$I_O = 0$	1.16		1.23	V
	Line regulation	$I_O = I_{Omax}$		3	10	mV
	Load regulation	$V_I = 53\text{V}$ , $I_O = (0.01...1.0) \times I_{Omax}$		3	10	mV
$V_{tr}$	Load transient voltage deviation	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ Load step = $0.5 \times I_{Omax}$		$\pm 350$		mV
$t_{tr}$	Load transient recovery time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ loadstep = $0.5 \times I_{Omax}$		50		$\mu\text{s}$
$t_r$	Ramp-up time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$		10	15	ms
$t_s$	Start-up time	$V_I$ connection to $0.9 \times V_{O_i}$ , $V_I = 53\text{V}$ $I_O = (0.1...1.0) \times I_{Omax}$ .		15	35	ms
$I_O$	Output current		0		30	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$	36			W
$I_{lim}$	Current limit threshold	$T_{Pcb} < T_{Pcbmax}$		36		A
$I_{sc}$	Short circuit current	$T_{Pcb} = 25^{\circ}\text{C}$ , $V_O < 0.5\text{V}$		42		A
$V_{Oac}$	Output ripple & noise	See ripple and noise, $I_{Omax}$ , $V_{Onom}$		50	80	$\text{mV}_{p-p}$
SVR	Supply voltage rejection (ac)	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ $f = 100\text{Hz}$ sinewave, $1\text{V}_{p-p}$		66		dB
OVP	Over voltage protection	$V_I = 53\text{V}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $T_{Pcb} = +25^{\circ}\text{C}$ .	1.4		1.7	V
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = 0.5 \times I_{Omax}$		87		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = I_{Omax}$		84		%
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = 0.5 \times I_{Omax}$		87		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	83	84		%
$P_d$	Power Dissipation	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$		6.4		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		160		kHz

# PKB 4318 PIOBNB - Typical Characteristics


## Efficiency

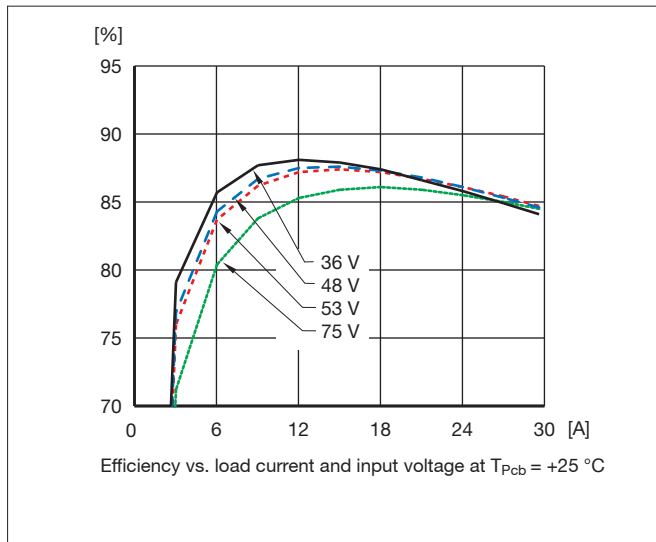


## Output Current Derating

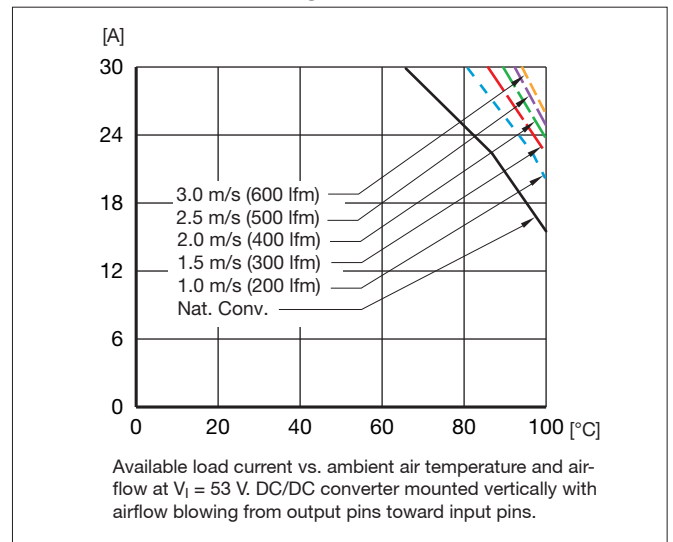


## Power Dissipation

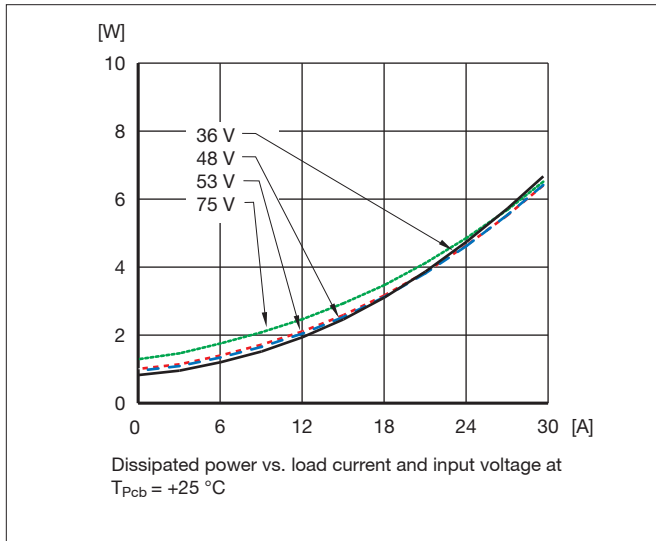

## Thermal Resistance

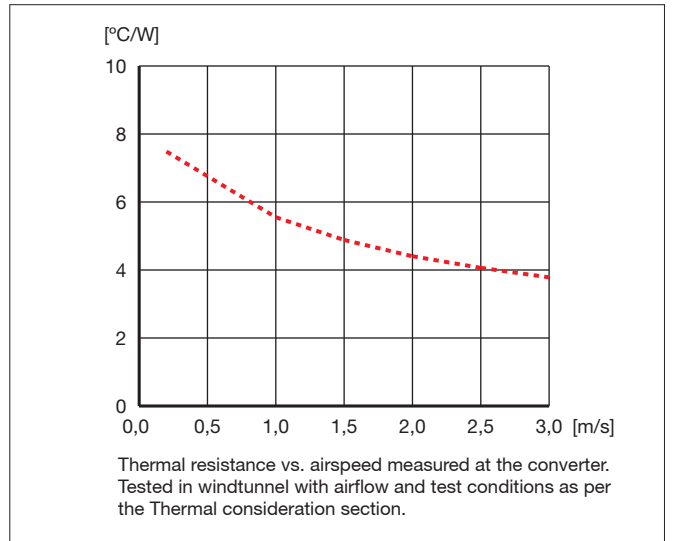


## Output Characteristic

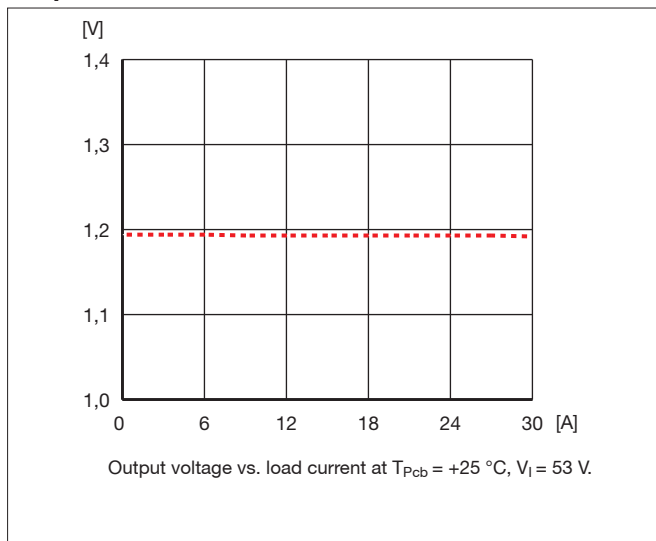




# PKB 4318 PIOBNB - Typical Characteristics


## Start-Up

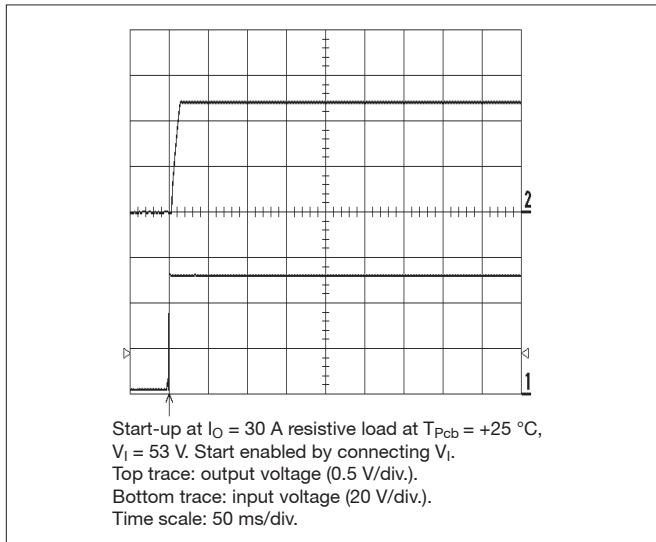


## Turn-Off

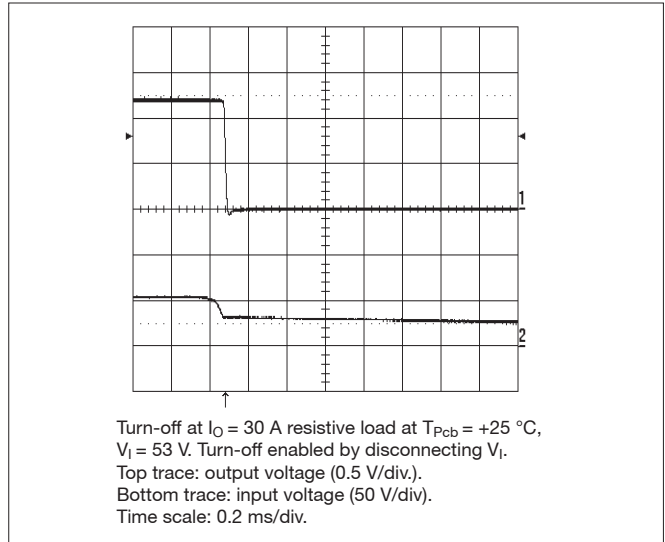

## Output Ripple

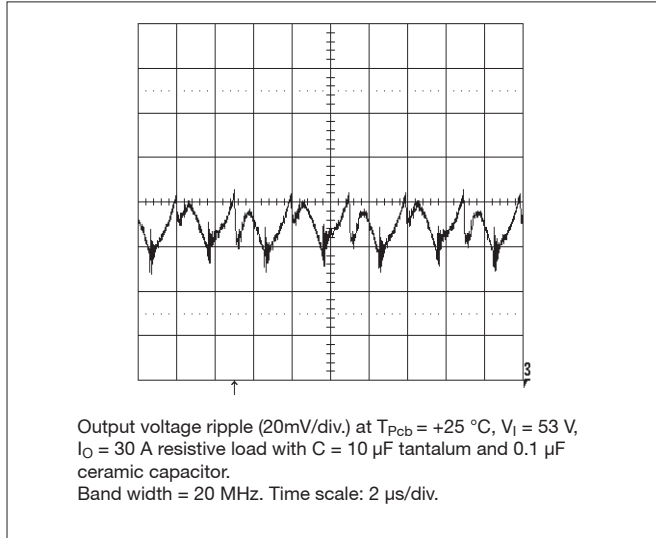

## Transient

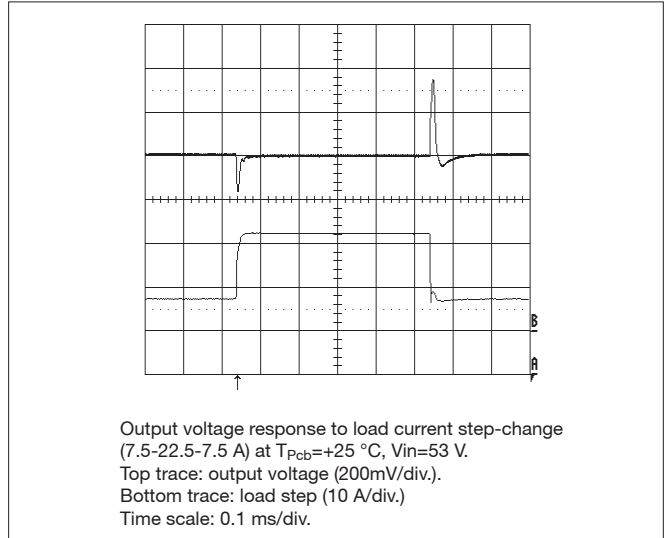

## Output Voltage Adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:


Output Voltage Adjust Upwards, Increase:  
 $R_{adj} = 5.11 \cdot ((1.2(100 + \Delta\%)) / (0.6\Delta\% - (100 + 2\Delta\%) / \Delta\%))$  kOhm

Output Voltage Adjust Downwards, Decrease:  
 $R_{adj} = 5.11(100 / \Delta\% - 2)$  kOhm

Eg Increase 4%  $\Rightarrow V_{out} = 1.248 V_{dc}$   
 $5.11(1.2(100 + 4) / (0.6 \times 4 - (100 + 2 \times 4) / 4)) = 128$  kOhm

Eg Decrease 2%  $\Rightarrow V_{out} = 1.176 V_{dc}$   
 $5.11(100 / 2 - 2) = 245$  kOhm

## Output Voltage Adjust

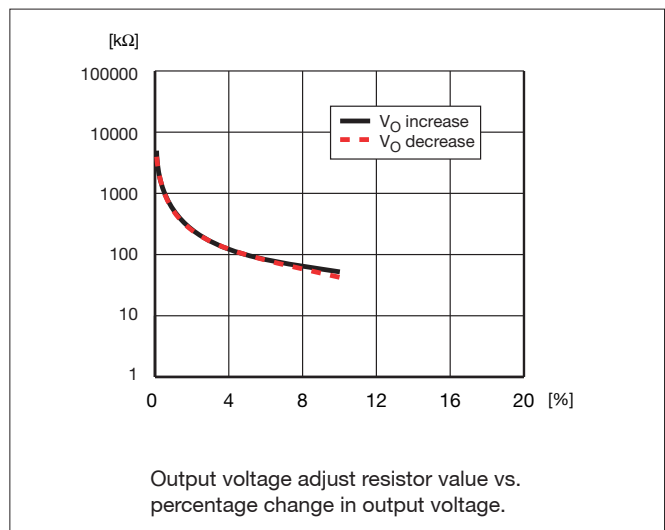


## PKB 4418 PIOANB – 1.5 V Data

$T_{Pcb} = -40...+90^{\circ}\text{C}$ ,  $V_I = 36...75\text{V}$ , sense pins connected to output pins unless otherwise specified.


Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O_i}$	Output voltage initial setting and accuracy	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	1.48	1.5	1.53	V
	Output adjust range	$I_O = I_{Omax}$ , $V_I = 53\text{V}$ , $T_{Pcb} = 25^{\circ}\text{C}$	1.20		1.65	V
$V_O$	Output voltage tolerance band	$I_O = 0.1...1 \times I_{Omax}$	1.47		1.54	V
	Idling voltage	$I_O = 0$	1.47		1.54	V
	Line regulation	$I_O = I_{Omax}$		3	10	mV
	Load regulation	$V_I = 53\text{V}$ , $I_O = (0.01...1.0) \times I_{Omax}$		3	10	mV
$V_{tr}$	Load transient voltage deviation	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ Load step = $0.5 \times I_{Omax}$		$\pm 350$		mV
$t_{tr}$	Load transient recovery time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ loadstep = $0.5 \times I_{Omax}$		50		$\mu\text{s}$
$t_r$	Ramp-up time	$I_O = (0.1...1.0) \times I_{Omax}$ . $V_I = 53\text{V}$		10	15	ms
$t_s$	Start-up time	$V_I$ connection to $0.9 \times V_{O_i}$ , $V_I = 53\text{V}$ $I_O = (0.1...1.0) \times I_{Omax}$ .		15	35	ms
$I_O$	Output current		0		30	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$	45			W
$I_{lim}$	Current limit threshold	$T_{Pcb} < T_{Pcbmax}$		36		A
$I_{sc}$	Short circuit current	$T_{Pcb} = 25^{\circ}\text{C}$ , $V_O < 0.5\text{V}$		42		A
$V_{Oac}$	Output ripple & noise	See ripple and noise, $I_{Omax}$ , $V_{Onom}$		50	80	$\text{mV}_{p-p}$
SVR	Supply voltage rejection (ac)	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ $f = 100\text{Hz}$ sinewave, $1\text{V}_{p-p}$		65		dB
OVP	Over voltage protection	$V_I = 53\text{V}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $T_{Pcb} = +25^{\circ}\text{C}$ .	1.8		2.1	V
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = 0.5 \times I_{Omax}$		89		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = I_{Omax}$		86		%
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = 0.5 \times I_{Omax}$		89		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	85	86		%
$P_d$	Power Dissipation	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$		7.3		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		160		kHz

# PKB 4418 PIOANB - Typical Characteristics


## Efficiency

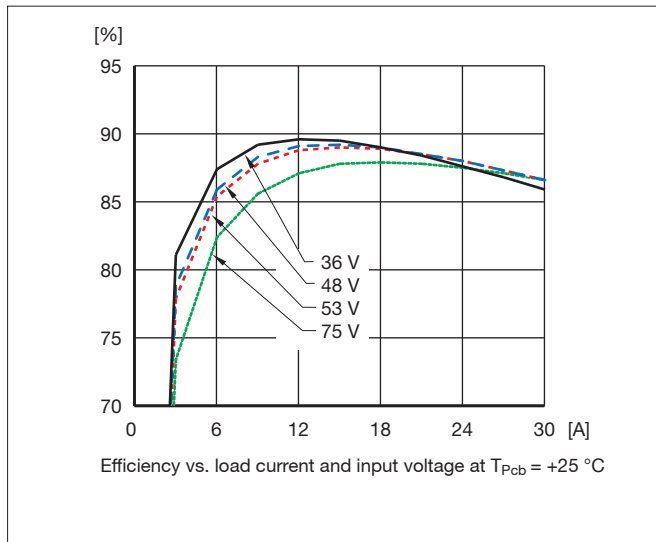


## Output Current Derating

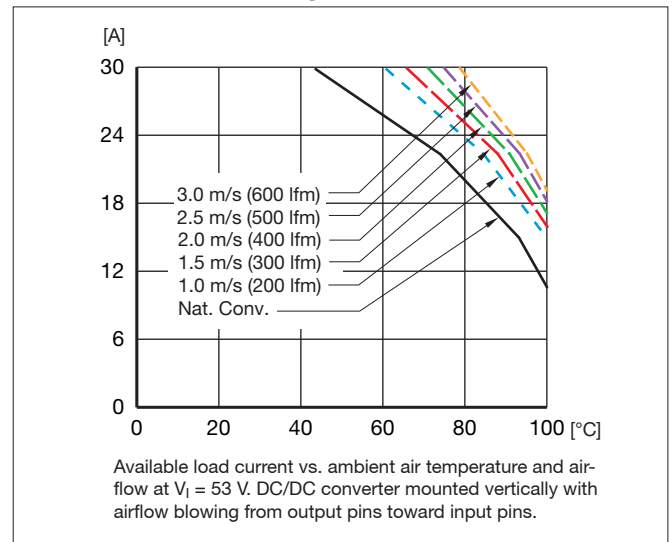


## Power Dissipation

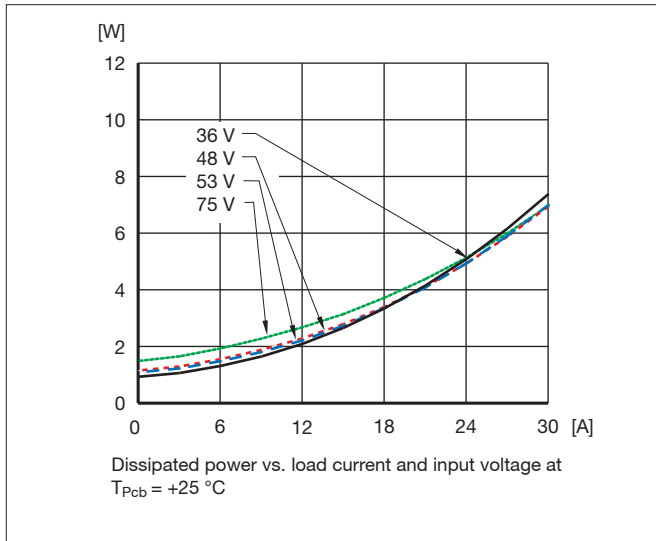

## Thermal Resistance

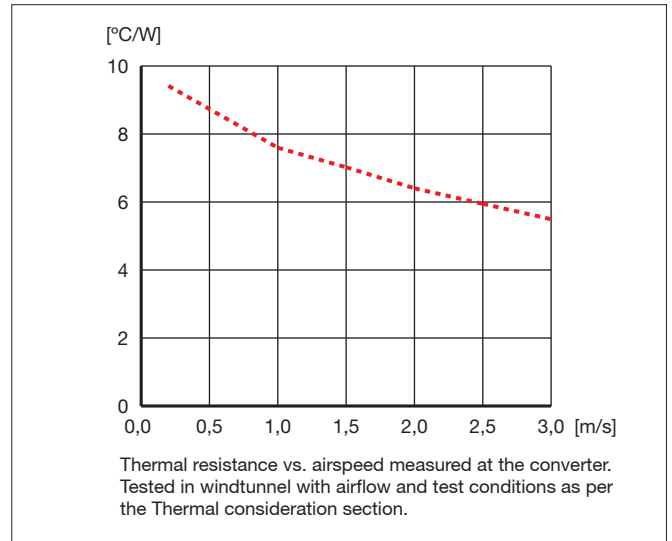


## Output Characteristic

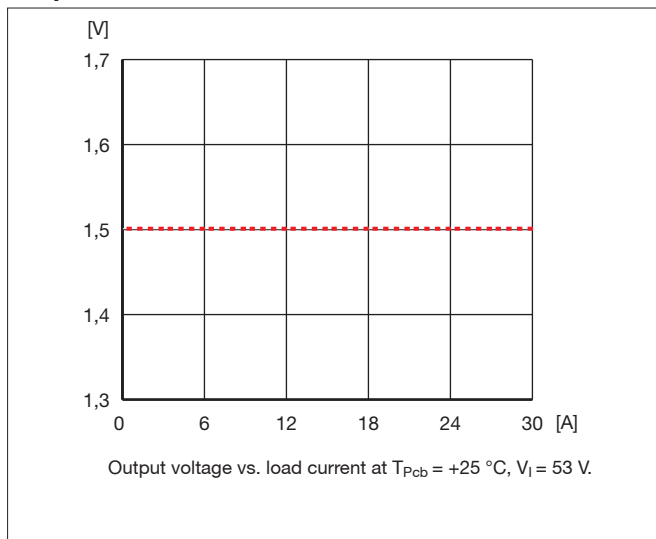


# PKB 4418 PIOANB - Typical Characteristics


## Start-Up

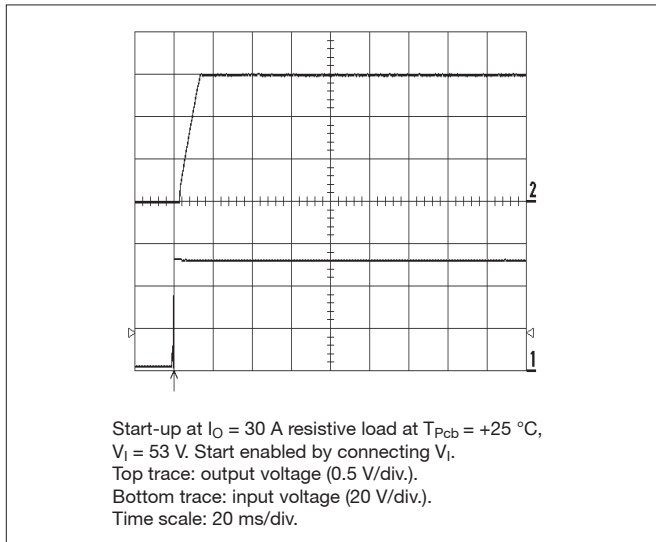


## Turn-Off

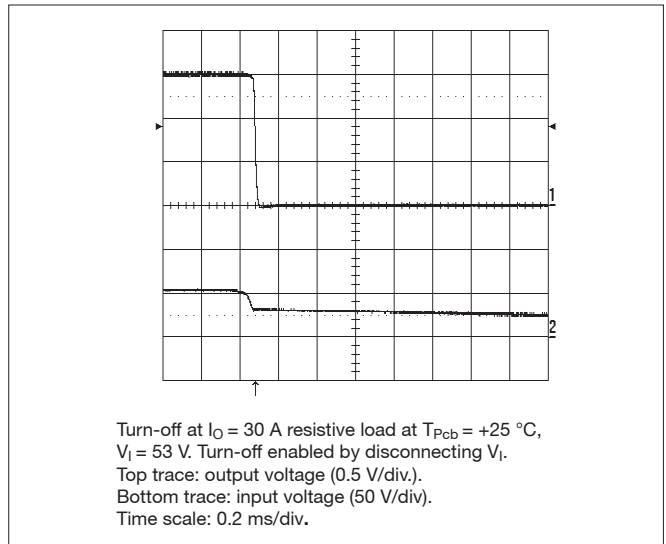

## Output Ripple

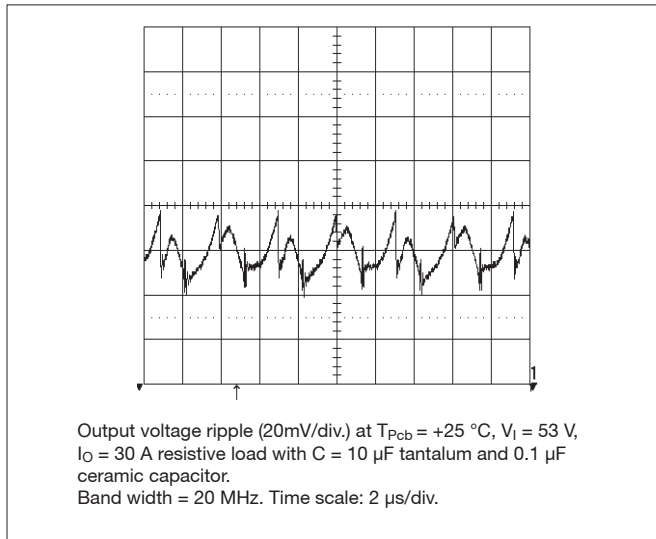

## Transient

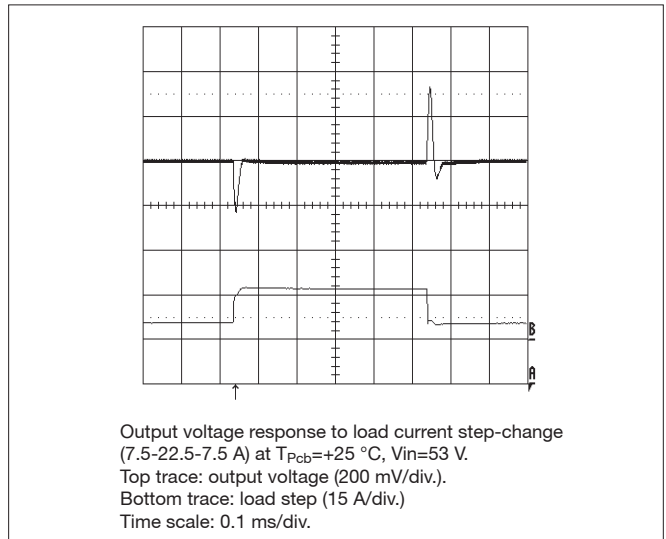

## Output Voltage Adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:


Output Voltage Adjust Upwards, Increase:  
 $R_{adj} = 5.11 \cdot (1.5(100 + \Delta\%)) / (1.225\Delta\% - (100 + 2\Delta\%) / \Delta\%)$  kOhm

Output Voltage Adjust Downwards, Decrease:  
 $R_{adj} = 5.11(100 / \Delta\% - 2)$  kOhm

Eg Increase 4%  $\Rightarrow V_{out} = 1.56 V_{dc}$   
 $5.11(1.5(100 + 4)) / (1.225 \cdot 4 - (100 + 2 \cdot 4) / 4) = 25$  kOhm

Eg Decrease 2%  $\Rightarrow V_{out} = 1.47 V_{dc}$   
 $5.11(100 / 2 - 2) = 245$  kOhm

## Output Voltage Adjust

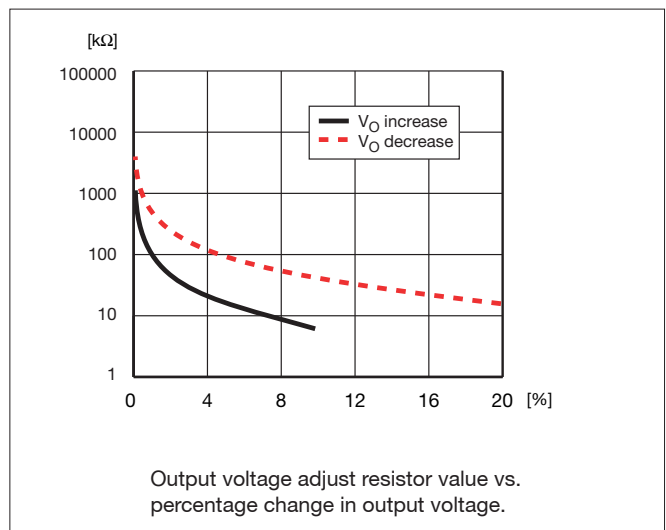


## PKB 4418 PINB - 1.8 V Data

$T_{Pcb} = -40...+90^{\circ}\text{C}$ ,  $V_I = 36...75\text{V}$ , sense pins connected to output pins unless otherwise specified.


Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O_i}$	Output voltage initial setting and accuracy	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	1.76	1.8	1.83	V
	Output adjust range	$I_O = I_{Omax}$ , $V_I = 53\text{V}$ , $T_{Pcb} = 25^{\circ}\text{C}$	1.44		1.98	V
$V_O$	Output voltage tolerance band	$I_O = 0.1...1 \times I_{Omax}$	1.77		1.84	V
	Idling voltage	$I_O = 0$	1.77		1.84	V
	Line regulation	$I_O = I_{Omax}$		3	10	mV
	Load regulation	$V_I = 53\text{V}$ , $I_O = (0.01...1.0) \times I_{Omax}$		3	10	mV
$V_{tr}$	Load transient voltage deviation	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ Load step = $0.5 \times I_{Omax}$		$\pm 250$		mV
$t_{tr}$	Load transient recovery time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ loadstep = $0.5 \times I_{Omax}$		50		$\mu\text{s}$
$t_r$	Ramp-up time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$		10	15	ms
$t_s$	Start-up time	$V_I$ connection to $0.9 \times V_{O_i}$ , $I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$		15	35	ms
$I_O$	Output current		0		25	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$	45			W
$I_{lim}$	Current limit threshold	$T_{Pcb} < T_{Pcbmax}$		30		A
$I_{sc}$	Short circuit current	$T_{Pcb} = 25^{\circ}\text{C}$ , $V_O < 0.5\text{V}$		35		A
$V_{Oac}$	Output ripple & noise	See ripple and noise, $I_{Omax}$ , $V_{Onom}$		30	50	$\text{mV}_{p-p}$
SVR	Supply voltage rejection (ac)	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ $f = 100\text{Hz}$ sinewave, $1\text{V}_{p-p}$		68		dB
OVP	Over voltage protection	$V_I = 53\text{V}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $T_{Pcb} = +25^{\circ}\text{C}$ .	2.1		2.5	V
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = 0.5 \times I_{Omax}$		90		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = I_{Omax}$		88.5		%
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = 0.5 \times I_{Omax}$		90		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	87	88.5		%
$P_d$	Power Dissipation	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$		6.4		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		195		kHz

# PKB 4418 PINB - Typical Characteristics


## Efficiency

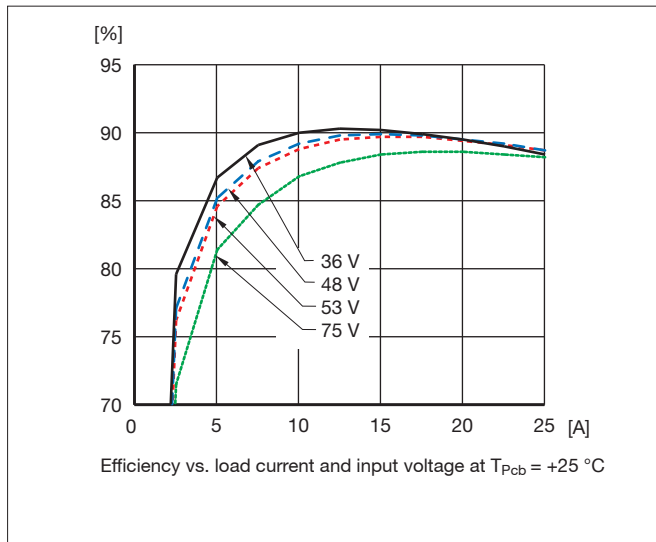


## Output Current Derating

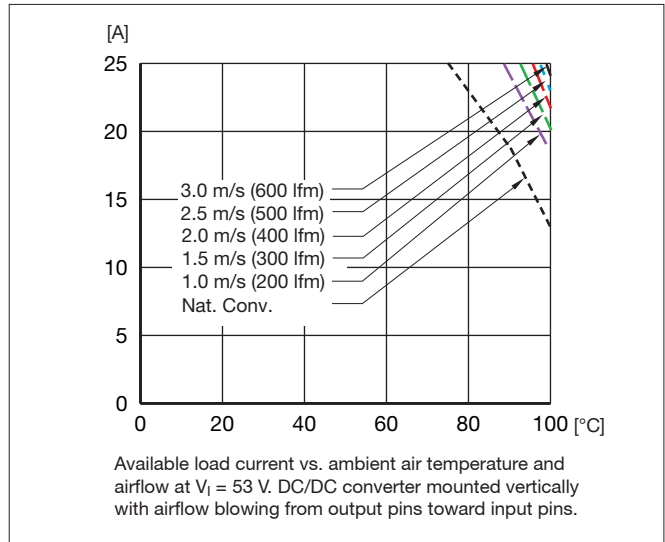


## Power Dissipation

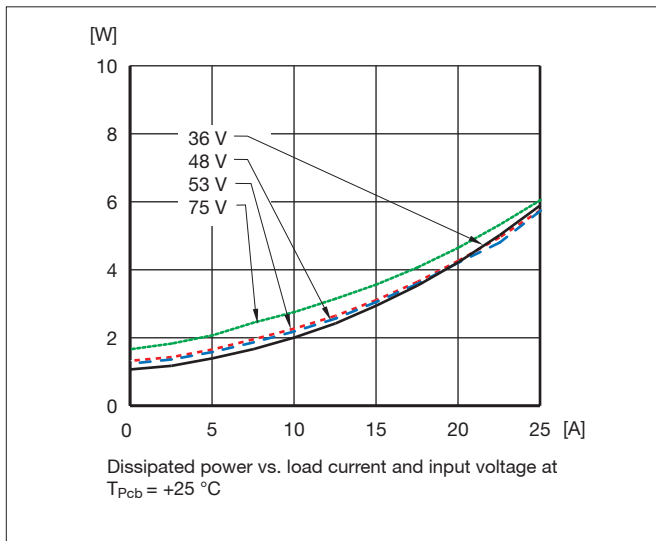

## Thermal Resistance

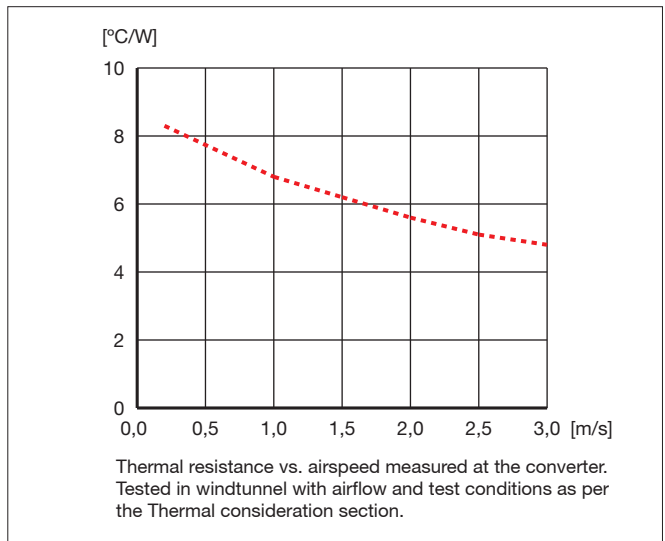


## Output Characteristic

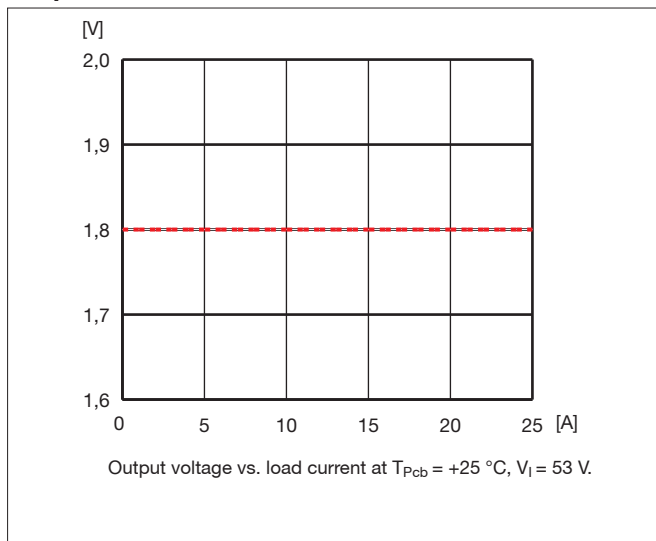


# PKB 4418 PINB - Typical Characteristics


## Start-Up

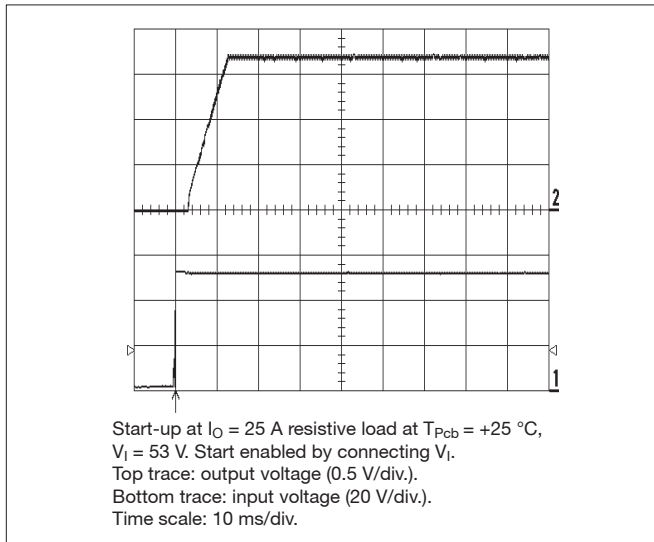


## Turn-Off

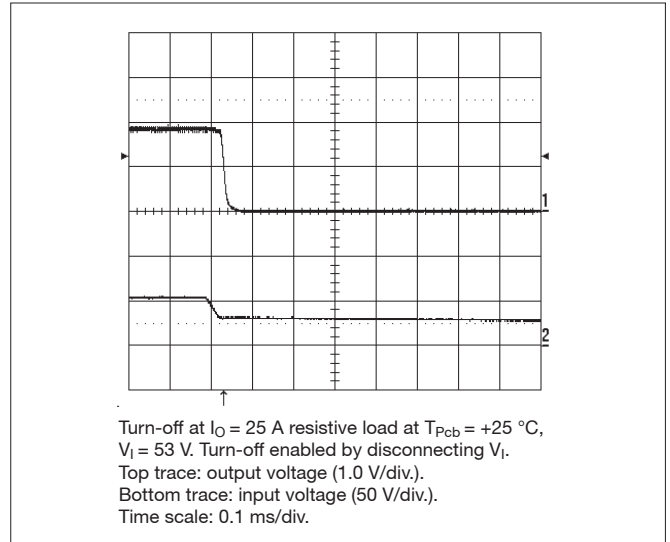

## Output Ripple

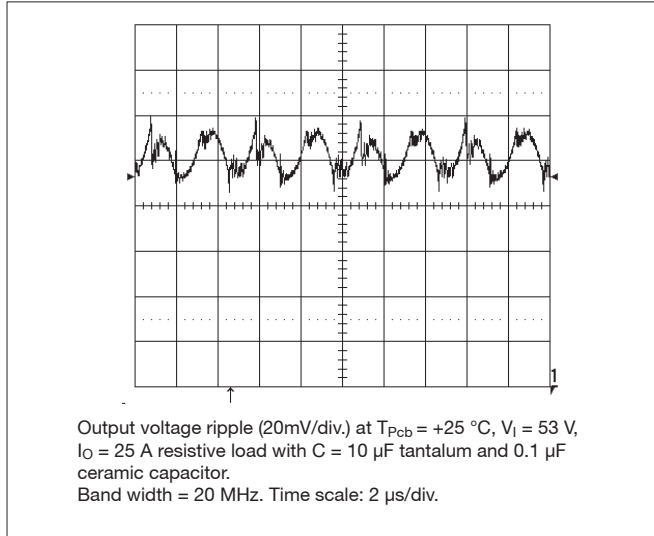

## Transient

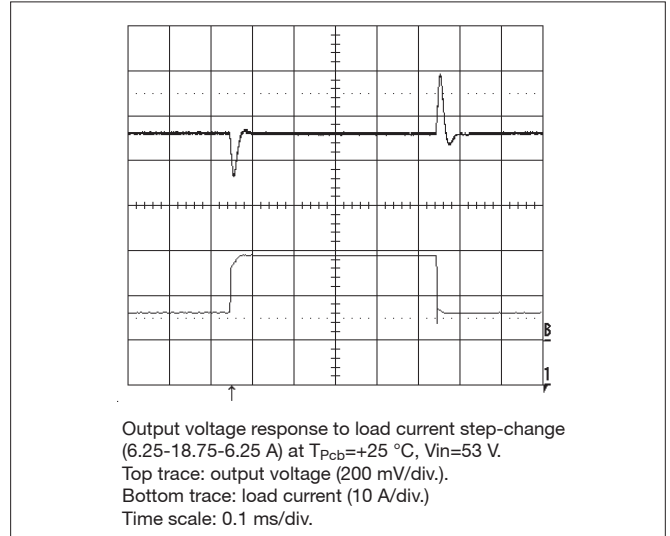

## Output Voltage Adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:


Output Voltage Adjust Upwards, Increase:  
 $R_{adj} = 5.11((1.8(100+\Delta\%))/1.225\Delta\% - (100+2\Delta\%)/\Delta\%)$  kOhm

Output Voltage Adjust Downwards, Decrease:  
 $R_{adj} = 5.11(100/\Delta\% - 2)$  kOhm

Eg Increase 4%  $\Rightarrow V_{out} = 1.87$  V<sub>dc</sub>  
 $5.11(1.8(100+4))/1.225 \times 4 - (100+2 \times 4)/4 = 57.3$  kOhm

Eg Decrease 2%  $\Rightarrow V_{out} = 1.76$  V<sub>dc</sub>  
 $5.11(100/2 - 2) = 245$  kOhm

## Output Voltage Adjust

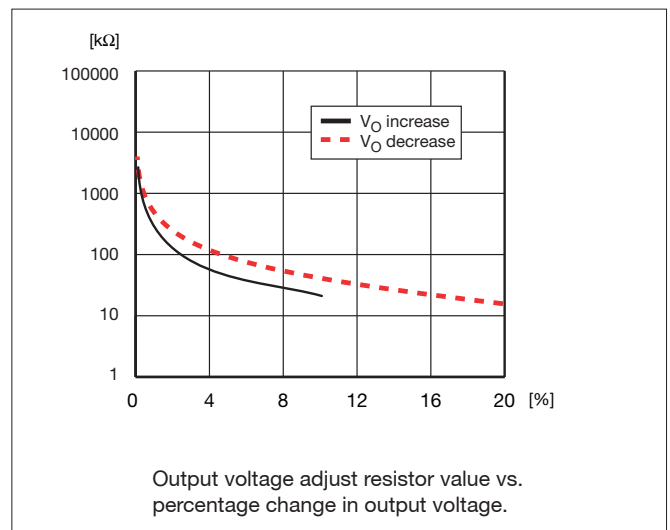

## PKB 4619 PINB – 2.5 V Data


$T_{Pcb} = -40...+90^{\circ}\text{C}$ ,  $V_I = 36...75\text{V}$ , sense pins connected to output pins unless otherwise specified.

Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O_i}$	Output voltage initial setting and accuracy	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	2.45	2.50	2.55	V
	Output adjust range	$I_O = I_{Omax}$ , $V_I = 53\text{V}$ , $T_{Pcb} = 25^{\circ}\text{C}$	2.00		2.75	V
$V_O$	Output voltage tolerance band	$I_O = 0.1...1 \times I_{Omax}$	2.4		2.6	V
	Idling voltage	$I_O = 0$	2.45		2.55	V
	Line regulation	$I_O = I_{Omax}$		3	10	mV
	Load regulation	$V_I = 53\text{V}$ , $I_O = (0.01...1.0) \times I_{Omax}$		3	10	mV
$V_{tr}$	Load transient voltage deviation	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ Load step = $0.5 \times I_{Omax}$		$\pm 250$		mV
$t_{tr}$	Load transient recovery time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ loadstep = $0.5 \times I_{Omax}$		30		$\mu\text{s}$
$t_r$	Ramp-up time	$I_O = (0.1...1.0) \times I_{Omax}$ .		18	30	ms
$t_s$	Start-up time	$V_I$ connection to $0.9 \times V_{O_i}$ , $I_O = (0.1...1.0) \times I_{Omax}$ .		35	60	ms
$I_O$	Output current		0		25	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$	62.5			W
$I_{lim}$	Current limit threshold	$T_{Pcb} < T_{Pcbmax}$		30		A
$I_{sc}$	Short circuit current	$T_{Pcb} = 25^{\circ}\text{C}$ , $V_O < 0.5\text{V}$		36		A
$V_{Oac}$	Output ripple & noise	See ripple and noise, $I_{Omax}$ , $V_{Onom}$		40	80	$\text{mV}_{p-p}$
SVR	Supply voltage rejection (ac)	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ $f = 100\text{Hz}$ sinewave, $1\text{V}_{p-p}$		59		dB
OVP	Over voltage protection	$V_I = 53\text{V}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $T_{Pcb} = +25^{\circ}\text{C}$ .	2.9		4.0	V
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = 0.5 \times I_{Omax}$		90		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = I_{Omax}$		90		%
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = 0.5 \times I_{Omax}$		90		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	87	90		%
$P_d$	Power Dissipation	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$		6.9		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		195		kHz




# PKB 4619 PINB - Typical Characteristics


## Efficiency

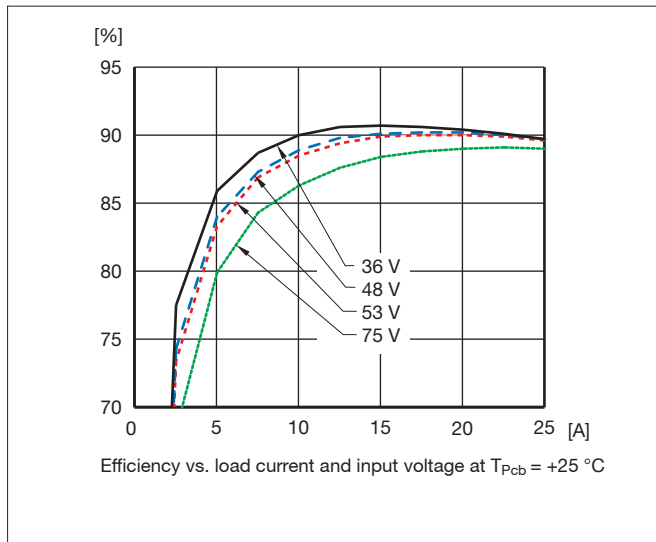


## Output Current Derating

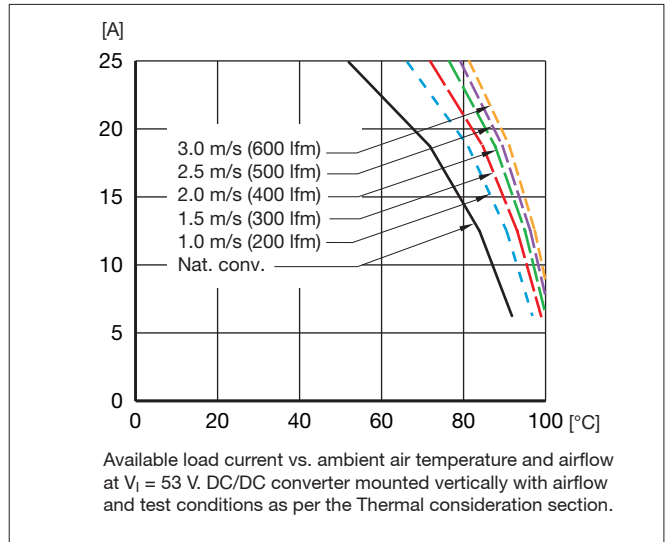


## Power Dissipation

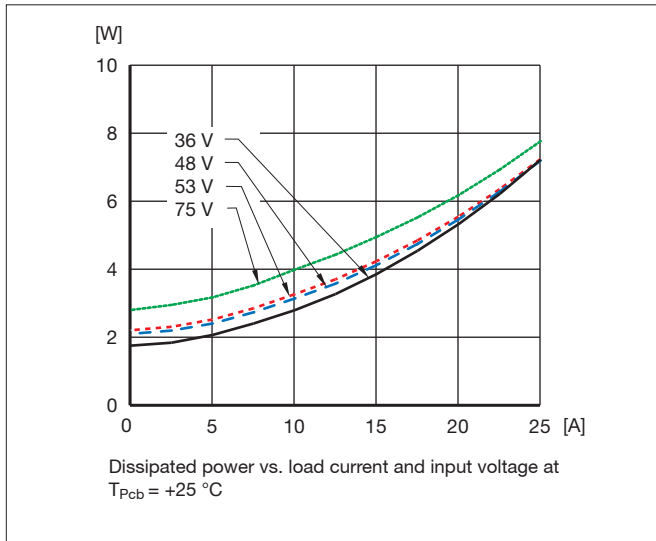

## Thermal Resistance

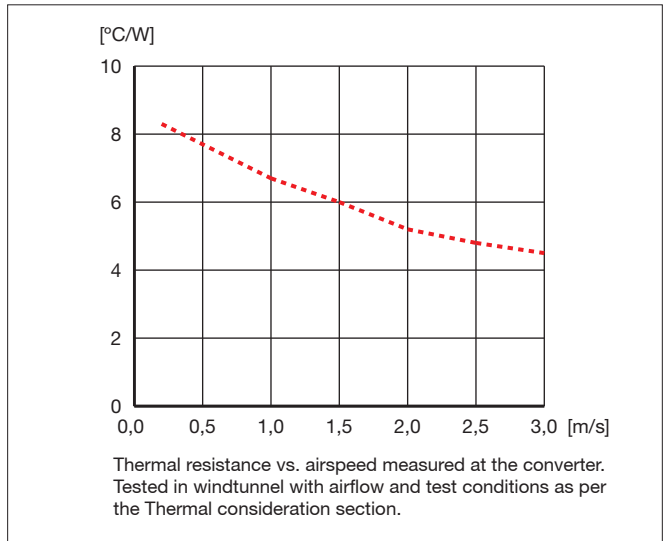


## Output Characteristic

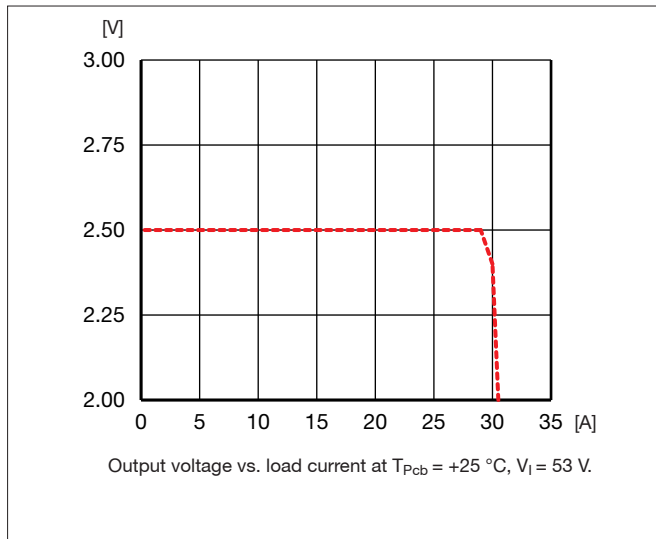


# PKB 4619 PINB - Typical Characteristics


## Start-Up

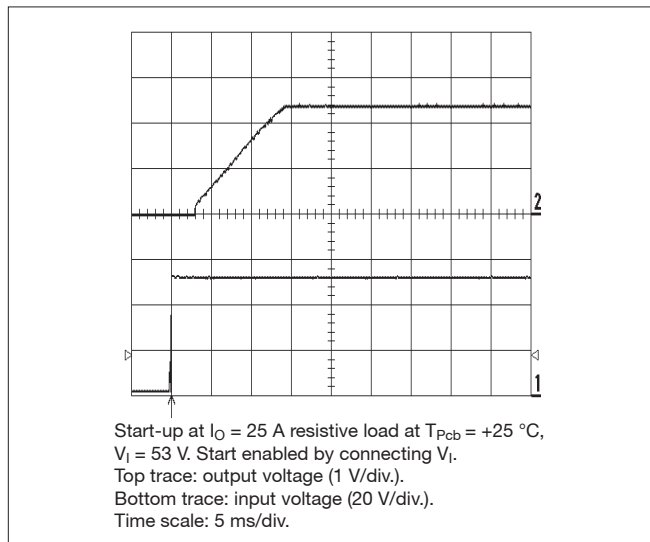


## Turn-Off

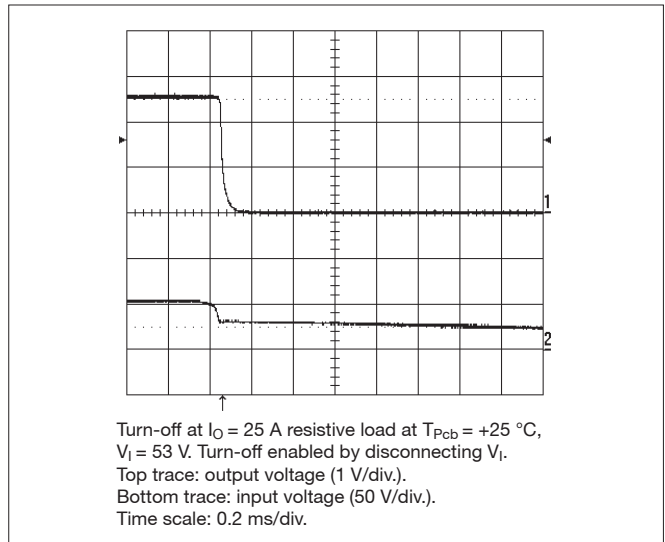

## Output Ripple

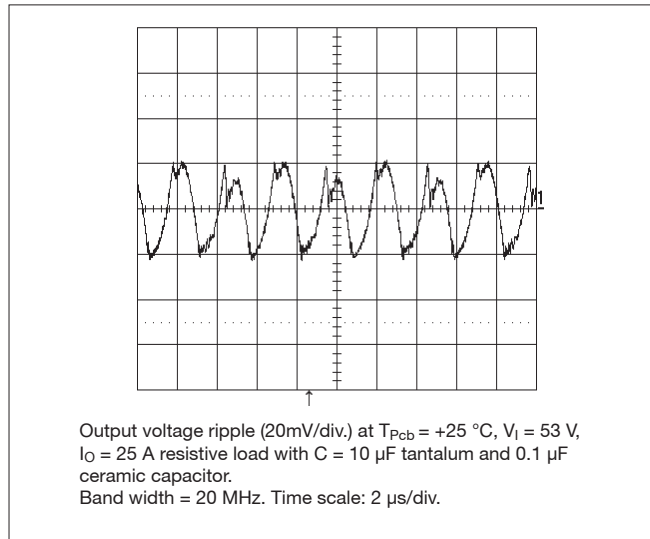

## Transient

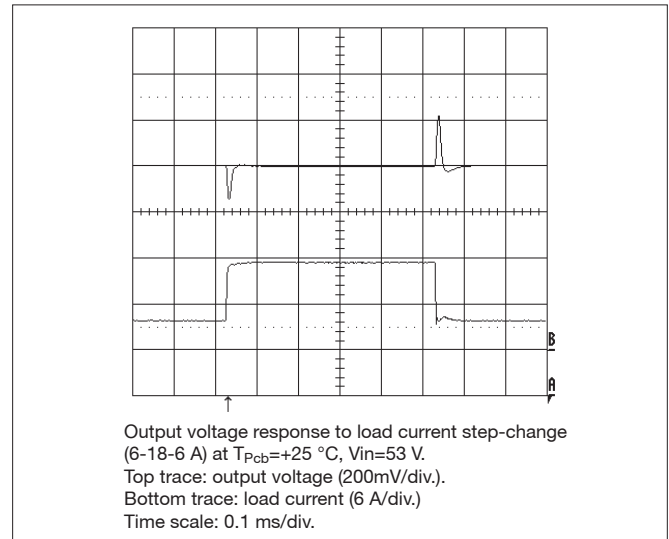

## Output Voltage Adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:


Output Voltage Adjust Upwards, Increase:  
 $R_{adj} = 5.11 \cdot ((2.5(100 + \Delta\%)) / (1.225\Delta\% - (100 + 2\Delta\%) / \Delta\%))$  kOhm

Output Voltage Adjust Downwards, Decrease:  
 $R_{adj} = 5.11(100 / \Delta\% - 2)$  kOhm

Eg Increase 4%  $\Rightarrow V_{out} = 2.600 V_{dc}$   
 $5.11(2.5(100 + 4) / (1.225 \cdot 4 - (100 + 2 \cdot 4) / 4)) = 133.17$  kOhm

Eg Decrease 2%  $\Rightarrow V_{out} = 2.450 V_{dc}$   
 $5.11(100 / 2 - 2) = 245$  kOhm

## Output Voltage Adjust

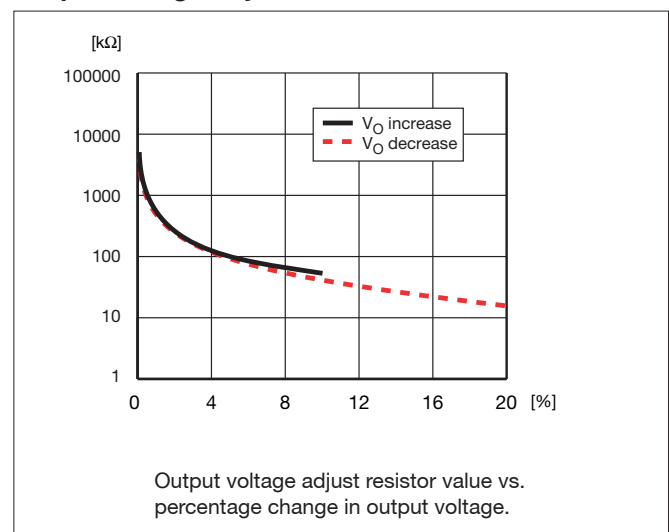


## PKB 4610 PINB – 3.3 V Data

$T_{Pcb} = -40...+90^{\circ}\text{C}$ ,  $V_I = 36...75\text{V}$ , sense pins connected to output pins unless otherwise specified.


Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O_i}$	Output voltage initial setting and accuracy	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	3.23	3.30	3.37	V
	Output adjust range	$I_O = I_{Omax}$ , $V_I = 53\text{V}$ , $T_{Pcb} = 25^{\circ}\text{C}$	2.64		3.63	V
$V_O$	Output voltage tolerance band	$I_O = 0.1...1 \times I_{Omax}$	3.20		3.40	V
	Idling voltage	$I_O = 0$	3.20		3.40	V
	Line regulation	$I_O = I_{Omax}$		3	10	mV
	Load regulation	$V_I = 53\text{V}$ , $I_O = (0.01...1.0) \times I_{Omax}$		3	10	mV
$V_{tr}$	Load transient voltage deviation	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ Load step = $0.5 \times I_{Omax}$		$\pm 350$		mV
$t_{tr}$	Load transient recovery time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ loadstep = $0.5 \times I_{Omax}$		50		$\mu\text{s}$
$t_r$	Ramp-up time	$I_O = (0.1...1.0) \times I_{Omax}$ .		18	30	ms
$t_s$	Start-up time	$V_I$ connection to $0.9 \times V_{O_i}$ , $I_O = (0.1...1.0) \times I_{Omax}$ .		35	60	ms
$I_O$	Output current		0		20	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$	66			W
$I_{lim}$	Current limit threshold	$T_{Pcb} < T_{Pcbmax}$		24		A
$I_{sc}$	Short circuit current	$T_{Pcb} = 25^{\circ}\text{C}$ , $V_O < 0.5\text{V}$		28		A
$V_{Oac}$	Output ripple & noise	See ripple and noise, $I_{Omax}$ , $V_{Onom}$		40	80	$\text{mV}_{p-p}$
SVR	Supply voltage rejection (ac)	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ $f = 100\text{Hz}$ sinewave, $1\text{V}_{p-p}$		68		dB
OVP	Over voltage protection	$V_I = 53\text{V}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $T_{Pcb} = +25^{\circ}\text{C}$ .	4.0		4.7	V
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = 0.5 \times I_{Omax}$		91.5		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = I_{Omax}$		89.5		%
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = 0.5 \times I_{Omax}$		91.5		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	88	89.5		%
$P_d$	Power Dissipation	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$		7.7		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		160		kHz

# PKB 4610 PINB - Typical Characteristics


## Efficiency

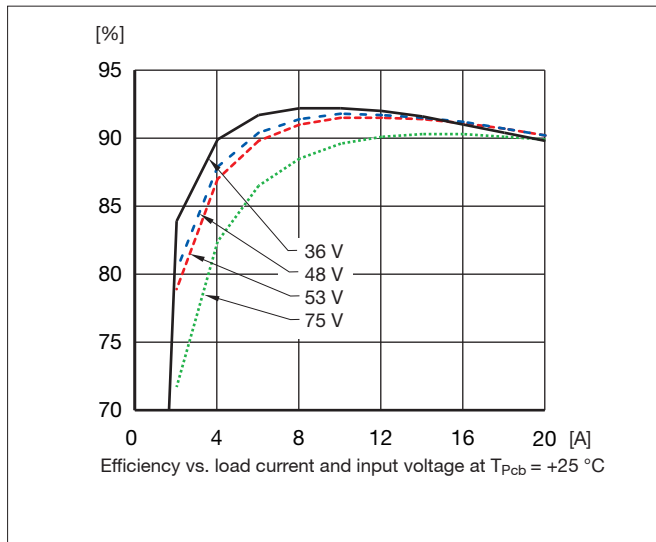


## Output Current Derating

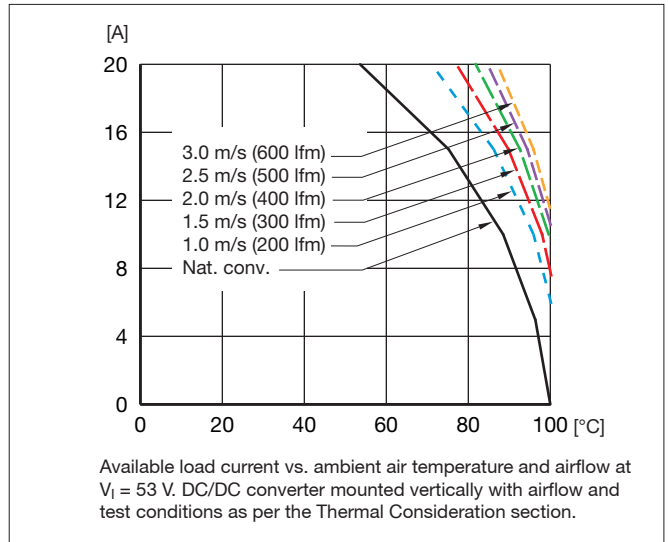


## Power Dissipation

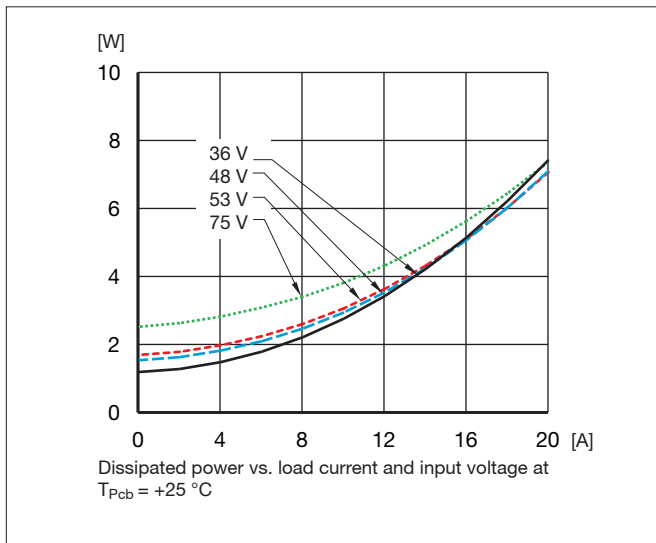

## Thermal Resistance

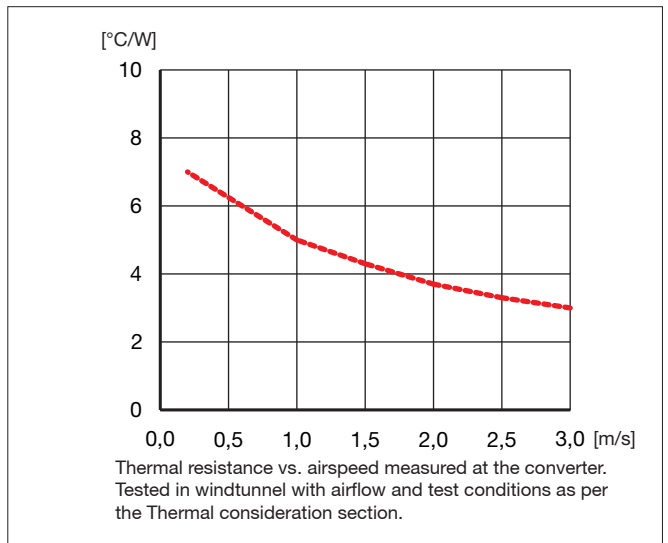


## Output Characteristic

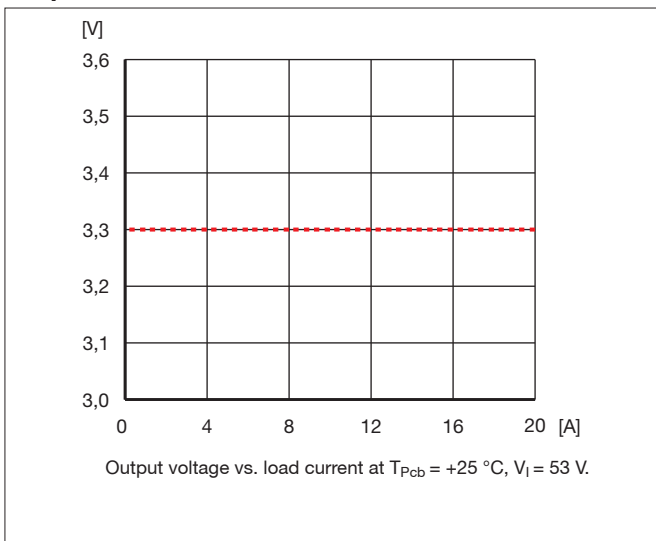


# PKB 4610 PINB - Typical Characteristics


## Start-Up

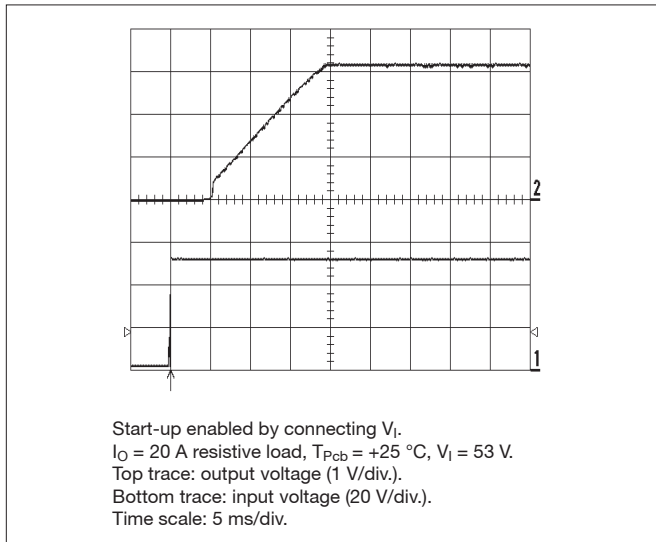


## Turn-Off

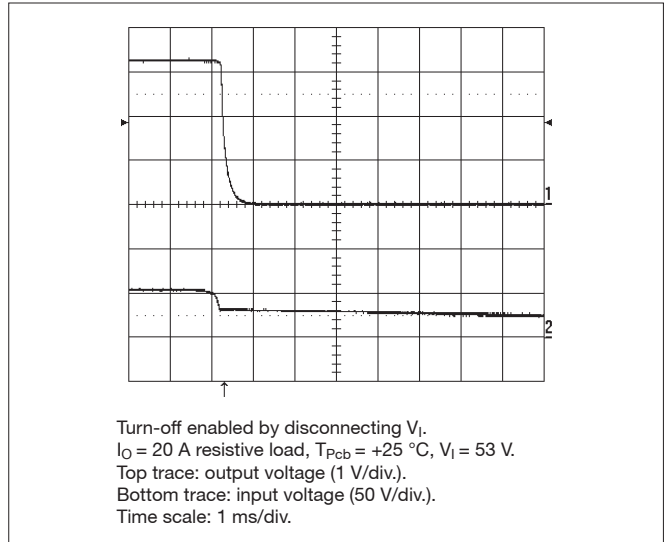

## Output Ripple

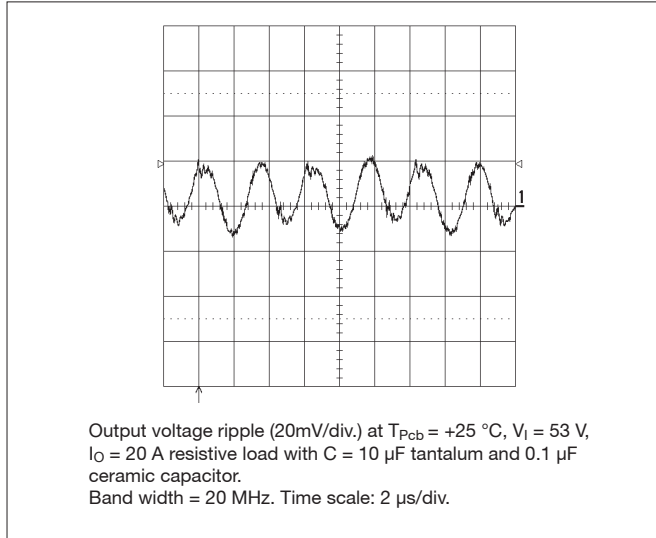

## Transient

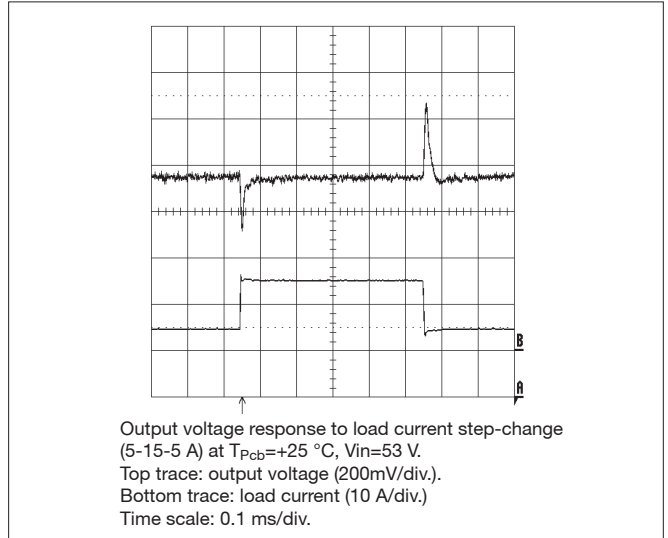

## Output Voltage Adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:


Output Voltage Adjust Upwards, Increase:  
 $R_{adj} = 5.11 \cdot ((3.3(100 + \Delta\%)) / (1.225\Delta\% - (100 + 2\Delta\%) / \Delta\%))$  kOhm

Output Voltage Adjust Downwards, Decrease:  
 $R_{adj} = 5.11(100 / \Delta\% - 2)$  kOhm

Eg Increase 4%  $\Rightarrow V_{out} = 3.43 V_{dc}$   
 $5.11(3.3(100+4)) / (1.225 \cdot 4 - (100 + 2 \cdot 4) / 4) = 220$  kOhm

Eg Decrease 2%  $\Rightarrow V_{out} = 3.23 V_{dc}$   
 $5.11(100 / 2 - 2) = 245$  kOhm

## Output Voltage Adjust

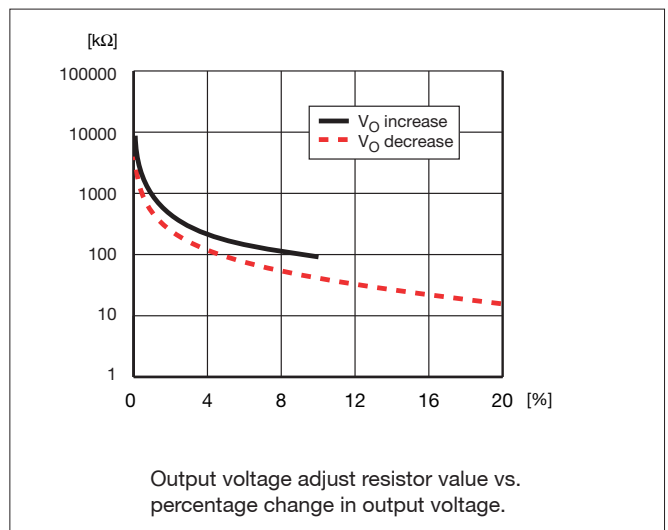


## PKB 4810 PINB – 3.3 V Data

$T_{Pcb} = -40...+90^{\circ}\text{C}$ ,  $V_I = 36...75\text{V}$ , sense pins connected to output pins unless otherwise specified.


Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O_i}$	Output voltage initial setting and accuracy	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	3.23	3.30	3.37	V
	Output adjust range	$I_O = I_{Omax}$ , $V_I = 53\text{V}$ , $T_{Pcb} = 25^{\circ}\text{C}$	2.64		3.63	V
$V_O$	Output voltage tolerance band	$I_O = 0.1...1 \times I_{Omax}$	3.20		3.40	V
	Idling voltage	$I_O = 0$	3.20		3.40	V
	Line regulation	$I_O = I_{Omax}$		3	10	mV
	Load regulation	$V_I = 53\text{V}$ , $I_O = (0.01...1.0) \times I_{Omax}$		3	10	mV
$V_{tr}$	Load transient voltage deviation	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ Load step = $0.5 \times I_{Omax}$		$\pm 375$		mV
$t_{tr}$	Load transient recovery time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ loadstep = $0.5 \times I_{Omax}$		50		$\mu\text{s}$
$t_r$	Ramp-up time	$I_O = (0.1...1.0) \times I_{Omax}$ .		18	30	ms
$t_s$	Start-up time	$V_I$ connection to $0.9 \times V_{O_i}$ , $I_O = (0.1...1.0) \times I_{Omax}$ .		35	60	ms
$I_O$	Output current		0		25	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$	82.5			W
$I_{lim}$	Current limit threshold	$T_{Pcb} < T_{Pcbmax}$		29		A
$I_{sc}$	Short circuit current	$T_{Pcb} = 25^{\circ}\text{C}$ , $V_O < 0.5\text{V}$		35		A
$V_{Oac}$	Output ripple & noise	See ripple and noise, $I_{Omax}$ , $V_{Onom}$		40	80	$\text{mV}_{p-p}$
SVR	Supply voltage rejection (ac)	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ $f = 100\text{Hz}$ sinewave, $1\text{V}_{p-p}$		68		dB
OVP	Over voltage protection	$V_I = 53\text{V}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $T_{Pcb} = +25^{\circ}\text{C}$ .	4.0		4.7	V
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = 0.5 \times I_{Omax}$		91.5		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = I_{Omax}$		89		%
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = 0.5 \times I_{Omax}$		91.5		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	88	89		%
$P_d$	Power Dissipation	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$		10		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		160		kHz

# PKB 4810 PINB - Typical Characteristics


## Efficiency

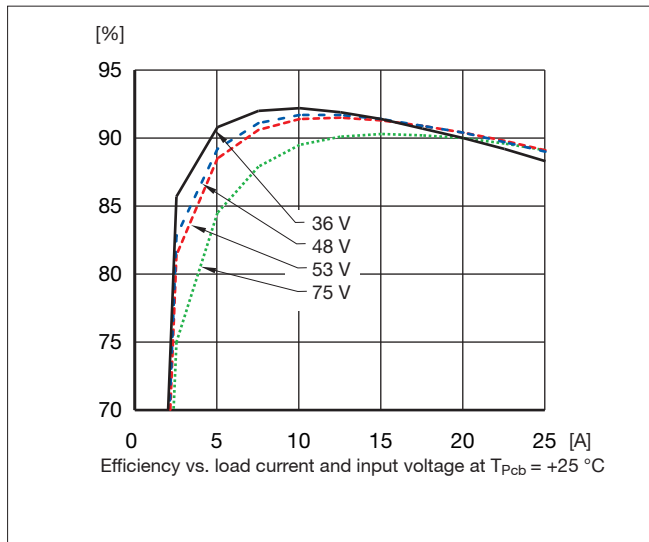


## Output Current Derating

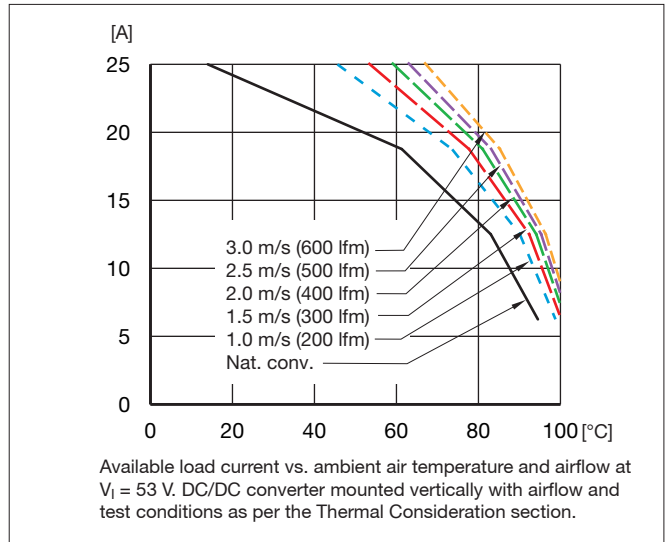


## Power Dissipation

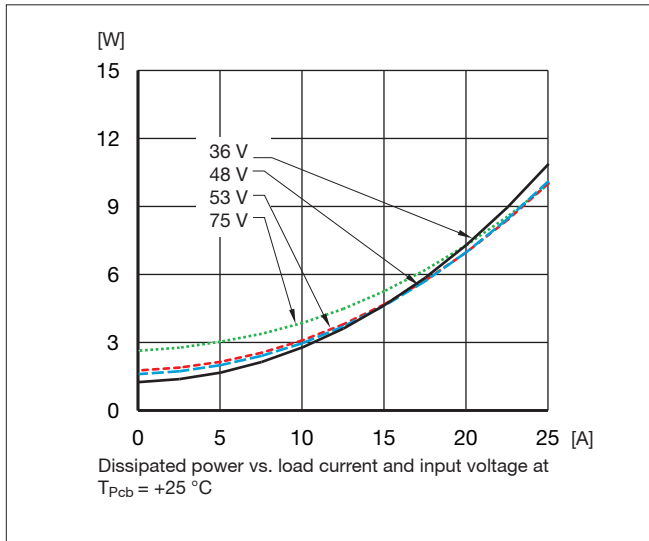

## Thermal Resistance

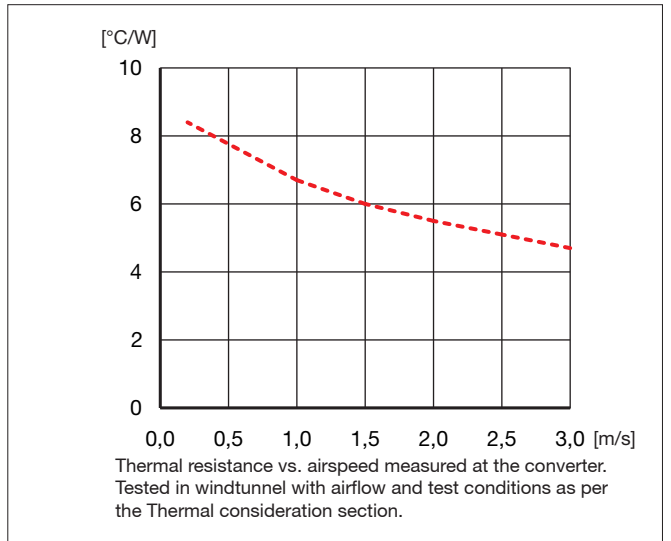


## Output Characteristic

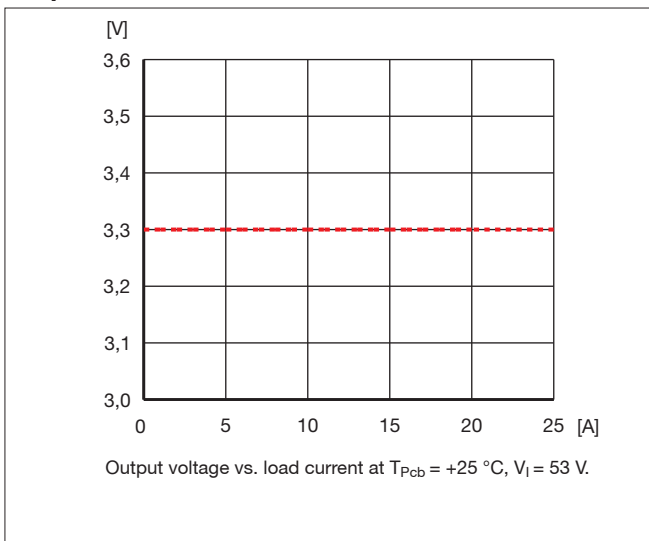


# PKB 4810 PINB - Typical Characteristics


## Start-Up

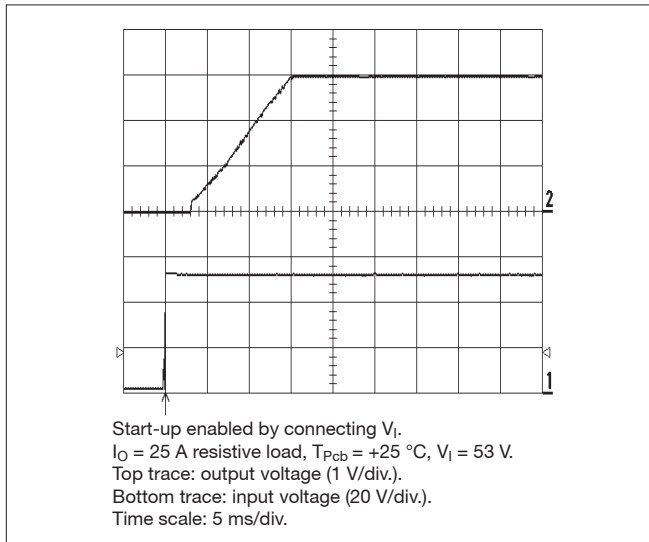


## Turn-Off

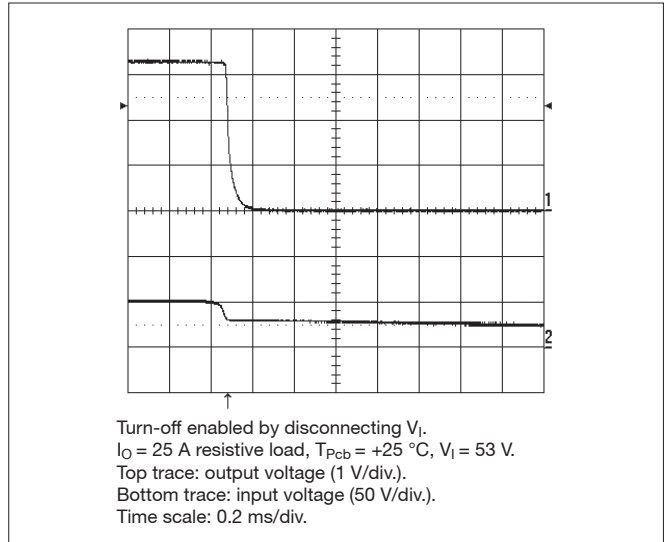

## Output Ripple

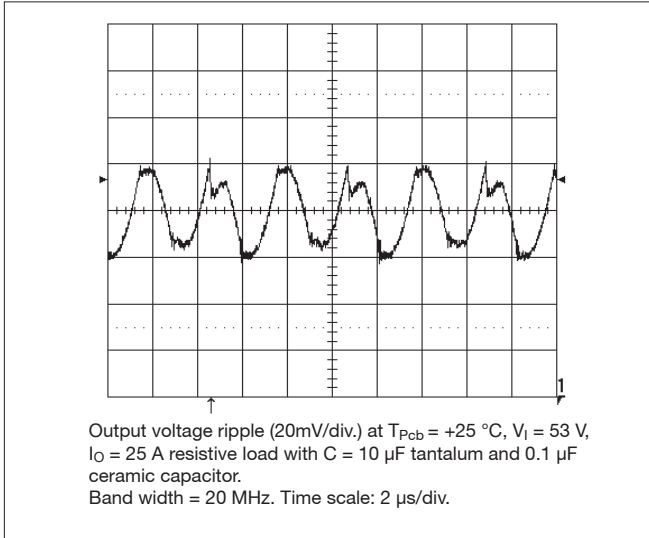

## Transient

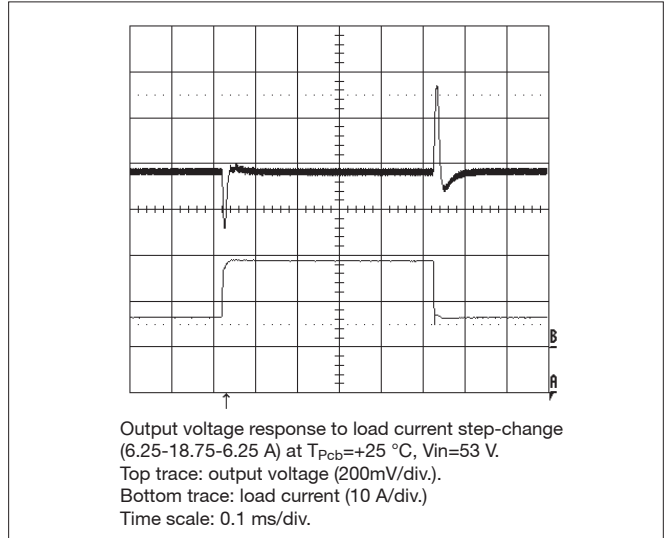

## Output Voltage Adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = 5.11 \left( \frac{3.3(100 + \Delta\%)}{1.225\Delta\% - (100 + 2\Delta\%)/\Delta\%} \right) \text{ kOhm}$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11(100/\Delta\% - 2) \text{ kOhm}$$


Eg Increase 4% =>  $V_{out} = 3.43 V_{dc}$

$$5.11(3.3(100+4)/1.225 \times 4 - (100+2 \times 4)/4) = 220 \text{ kOhm}$$

Eg Decrease 2% =>  $V_{out} = 3.23 V_{dc}$

$$5.11(100/2 - 2) = 245 \text{ kOhm}$$

## Output Voltage Adjust

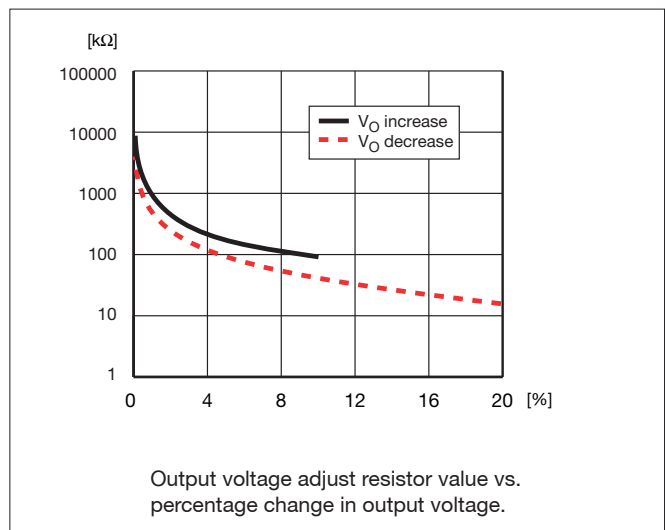




## PKB 4711 PINB – 5 V Data

$T_{Pcb} = -40 \dots +90 \text{ }^{\circ}\text{C}$ ,  $V_I = 36 \dots 75 \text{ V}$ , sense pins connected to output pins unless otherwise specified.


Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O_i}$	Output voltage initial setting and accuracy	$T_{Pcb} = +25 \text{ }^{\circ}\text{C}$ , $V_I = 53 \text{ V}$ , $I_O = I_{Omax}$	4.90	5.0	5.10	V
	Output adjust range	$I_O = I_{Omax}$ , $V_I = 53 \text{ V}$ , $T_{Pcb} = 25 \text{ }^{\circ}\text{C}$	4.00		5.50	V
$V_O$	Output voltage tolerance band	$I_O = 0.1 \dots 1 \times I_{Omax}$	4.85		5.15	V
	Idling voltage	$I_O = 0$	4.85		5.15	V
	Line regulation	$I_O = I_{Omax}$		3	10	mV
	Load regulation	$V_I = 53 \text{ V}$ , $I_O = (0.01 \dots 1.0) \times I_{Omax}$		3	10	mV
$V_{tr}$	Load transient voltage deviation	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53 \text{ V}$ Load step = $0.5 \times I_{Omax}$		$\pm 300$		mV
$t_{tr}$	Load transient recovery time	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53 \text{ V}$ loadstep = $0.5 \times I_{Omax}$		50		$\mu\text{s}$
$t_r$	Ramp-up time	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ .		18	30	ms
$t_s$	Start-up time	$V_I$ connection to $0.9 \times V_{O_i}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ .		40	60	ms
$I_O$	Output current		0		15	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$	75			W
$I_{lim}$	Current limit threshold	$T_{Pcb} < T_{Pcbmax}$		17.5		A
$I_{sc}$	Short circuit current	$T_{Pcb} = 25 \text{ }^{\circ}\text{C}$ , $V_O < 0.5 \text{ V}$		23		A
$V_{Oac}$	Output ripple & noise	See ripple and noise, $I_{Omax}$ , $V_{Onom}$		30	80	mV <sub>p-p</sub>
SVR	Supply voltage rejection (ac)	$T_{Pcb} = +25 \text{ }^{\circ}\text{C}$ , $V_I = 53 \text{ V}$ $f = 100\text{Hz}$ sinewave, 1 V <sub>p-p</sub>		65		dB
OVP	Over voltage protection	$V_I = 53 \text{ V}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $T_{Pcb} = +25 \text{ }^{\circ}\text{C}$ .	6.0		7.0	V
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25 \text{ }^{\circ}\text{C}$ , $V_I = 48 \text{ V}$ , $I_O = 0.5 \times I_{Omax}$		92		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25 \text{ }^{\circ}\text{C}$ , $V_I = 48 \text{ V}$ , $I_O = I_{Omax}$		91.2		%
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25 \text{ }^{\circ}\text{C}$ , $V_I = 53 \text{ V}$ , $I_O = 0.5 \times I_{Omax}$		92		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25 \text{ }^{\circ}\text{C}$ , $V_I = 53 \text{ V}$ , $I_O = I_{Omax}$	90	91.2		%
$P_d$	Power Dissipation	$T_{Pcb} = +25 \text{ }^{\circ}\text{C}$ , $V_I = 53 \text{ V}$ , $I_O = I_{Omax}$		7.8		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		195		kHz

# PKB 4711 PINB - Typical Characteristics


## Efficiency

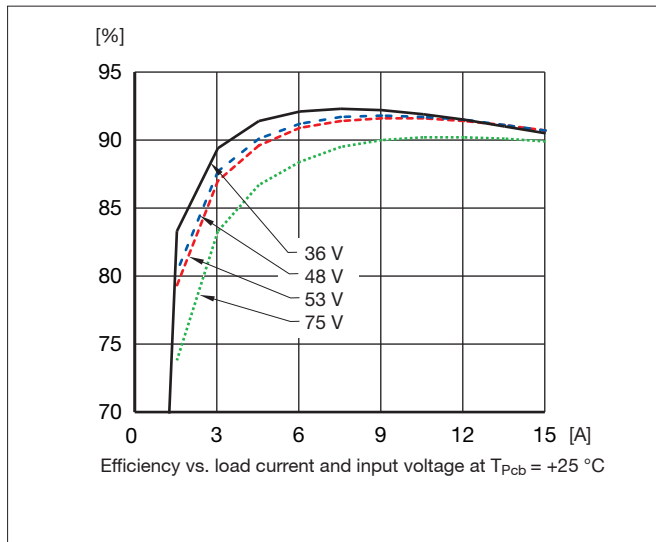


## Output Current Derating

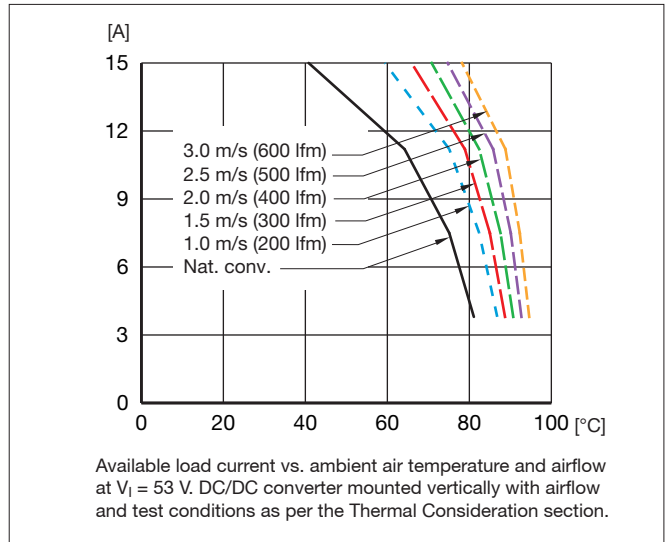


## Power Dissipation

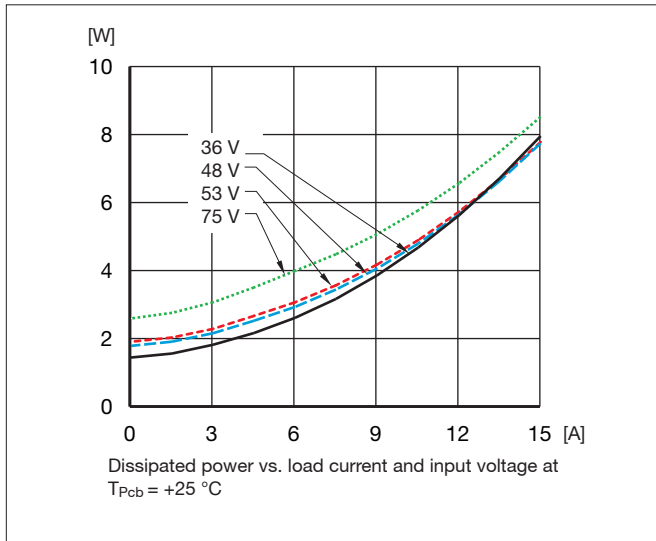

## Thermal Resistance

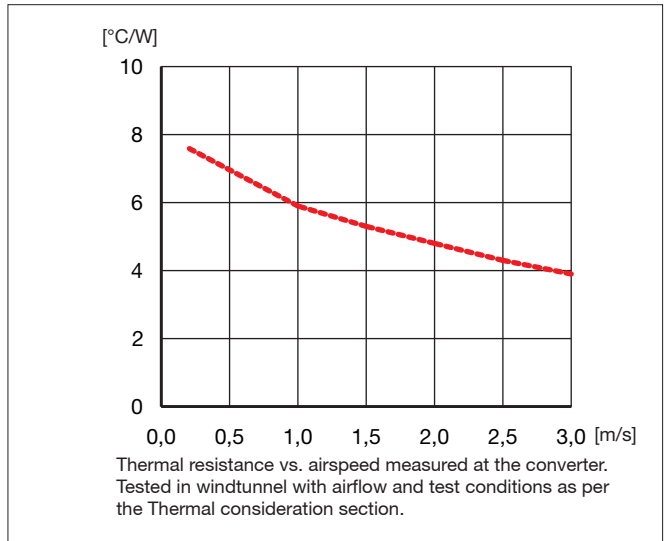


## Output Characteristic

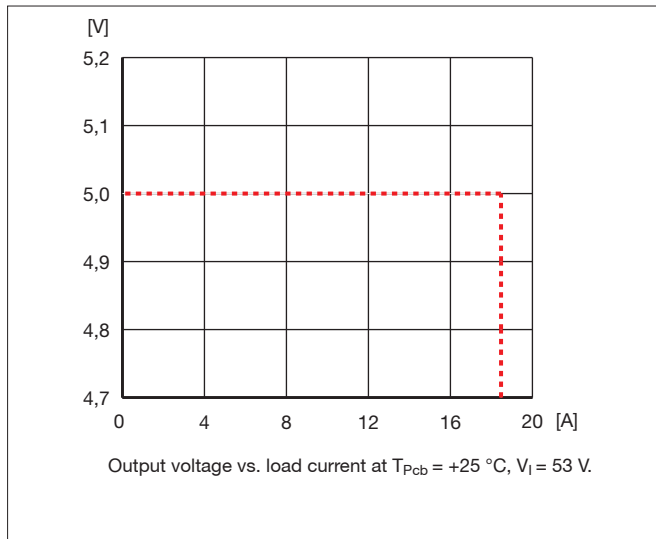


# PKB 4711 PINB - Typical Characteristics


## Start-Up

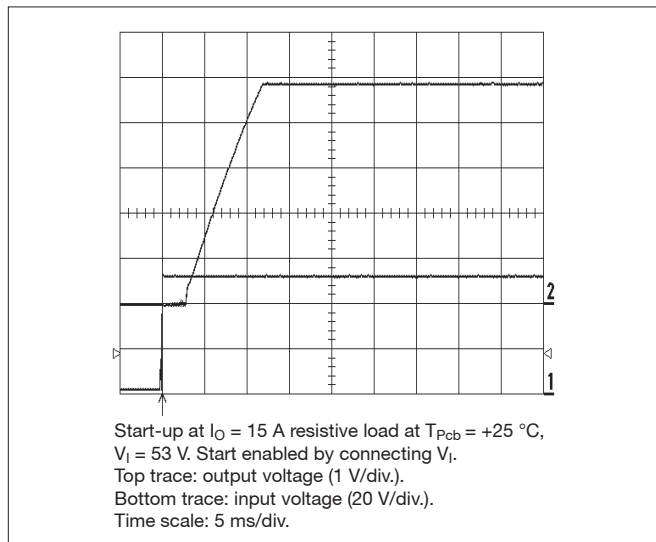


## Turn-Off

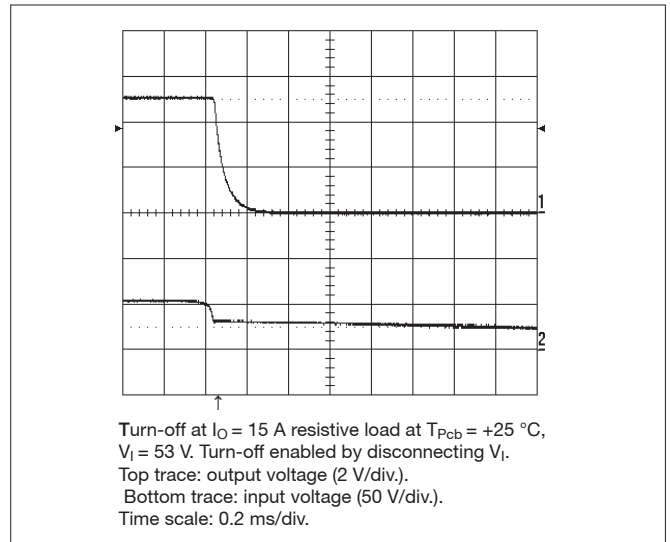

## Output Ripple

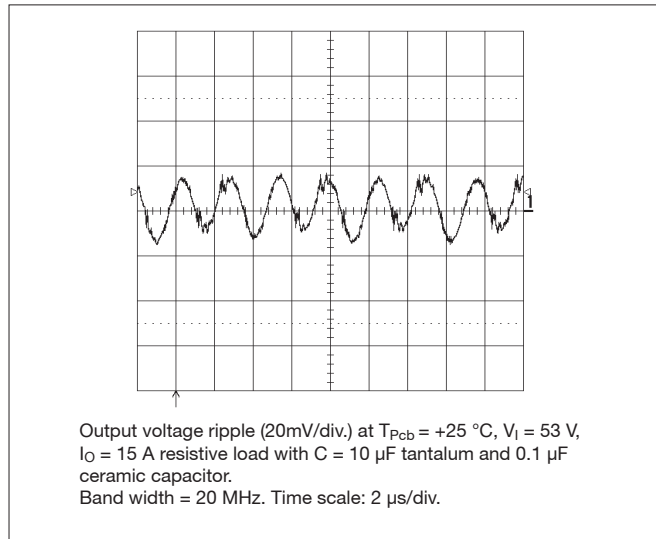

## Transient

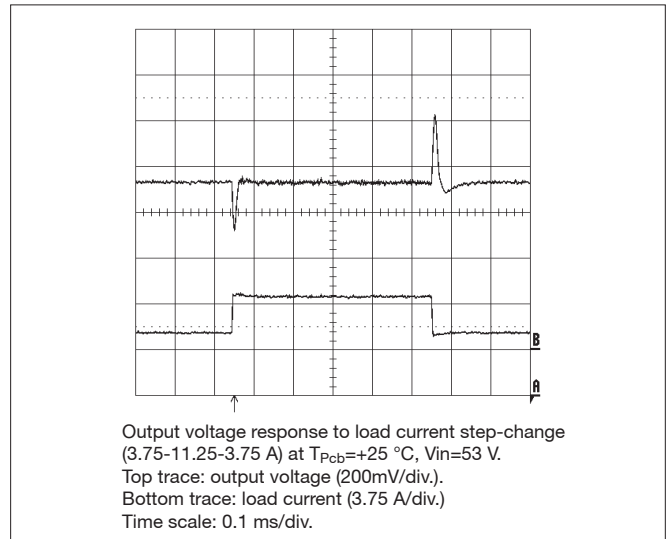

## Output Voltage Adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:


Output Voltage Adjust Upwards, Increase:  
 $R_{adj} = 5.11 \cdot ((5(100 + \Delta\%)) / (1.225\Delta\% - (100 + 2\Delta\%) / \Delta\%))$  kOhm

Output Voltage Adjust Downwards, Decrease:  
 $R_{adj} = 5.11(100 / \Delta\% - 2)$  kOhm

Eg Increase 4%  $\Rightarrow V_{out} = 5.2 V_{dc}$   
 $5.11(5(100 + 4) / (1.225 \cdot 4 - (100 + 2 \cdot 4) / 4)) = 404$  kOhm

Eg Decrease 2%  $\Rightarrow V_{out} = 4.9 V_{dc}$   
 $5.11(100 / 2 - 2) = 245$  kOhm

## Output Voltage Adjust

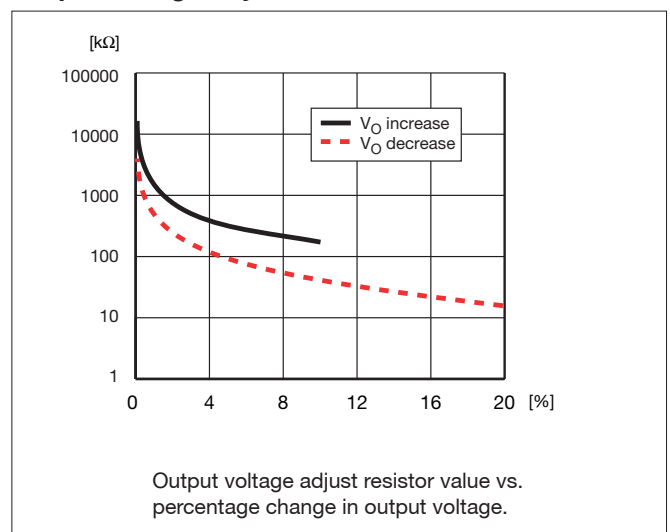


## PKB 4713 PINB – 12 V Data

$T_{Pcb} = -40...+90^{\circ}\text{C}$ ,  $V_I = 36...75\text{V}$ , sense pins connected to output pins unless otherwise specified.


Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O_i}$	Output voltage initial setting and accuracy	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	11.80	12	12.25	V
	Output adjust range	$I_O = I_{Omax}$ , $V_I = 53\text{V}$ , $T_{Pcb} = 25^{\circ}\text{C}$	9.6		13.2	V
$V_O$	Output voltage tolerance band	$I_O = 0.1...1 \times I_{Omax}$	11.75		12.30	V
	Idling voltage	$I_O = 0$	11.75		12.30	V
	Line regulation	$I_O = I_{Omax}$		3	20	mV
	Load regulation	$V_I = 53\text{V}$ , $I_O = (0.01...1.0) \times I_{Omax}$		3	10	mV
$V_{tr}$	Load transient voltage deviation	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ Load step = $0.5 \times I_{Omax}$		$\pm 250$		mV
$t_{tr}$	Load transient recovery time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ loadstep = $0.5 \times I_{Omax}$		100		$\mu\text{s}$
$t_r$	Ramp-up time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$		10	15	ms
$t_s$	Start-up time	$V_I$ connection to $0.9 \times V_{O_i}$ , $I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$		15	20	ms
$I_O$	Output current		0		6	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$	72			W
$I_{lim}$	Current limit threshold	$T_{Pcb} < T_{Pcbmax}$		7.2		A
$I_{sc}$	Short circuit current	$T_{Pcb} = 25^{\circ}\text{C}$ , $V_O < 0.5\text{V}$		9		A
$V_{Oac}$	Output ripple & noise	See ripple and noise, $I_{Omax}$ , $V_{Onom}$		50	100	$\text{mV}_{p-p}$
SVR	Supply voltage rejection (ac)	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ $f = 100\text{Hz}$ sinewave, $1\text{V}_{p-p}$		36		dB
OVP	Over voltage protection	$V_I = 53\text{V}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $T_{Pcb} = +25^{\circ}\text{C}$ .	15		17	V
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = 0.5 \times I_{Omax}$		92		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = I_{Omax}$		92		%
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = 0.5 \times I_{Omax}$		92		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	90	92		%
$P_d$	Power Dissipation	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$		6.3		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		195		kHz

# PKB 4713 PINB - Typical Characteristics


## Efficiency

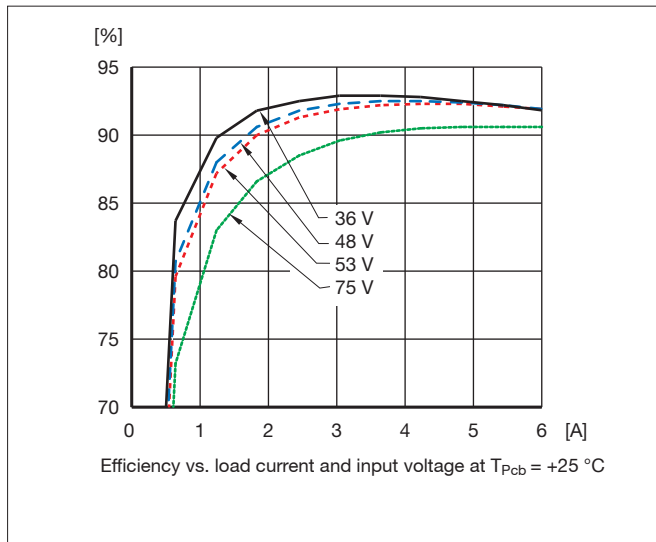


## Output Current Derating

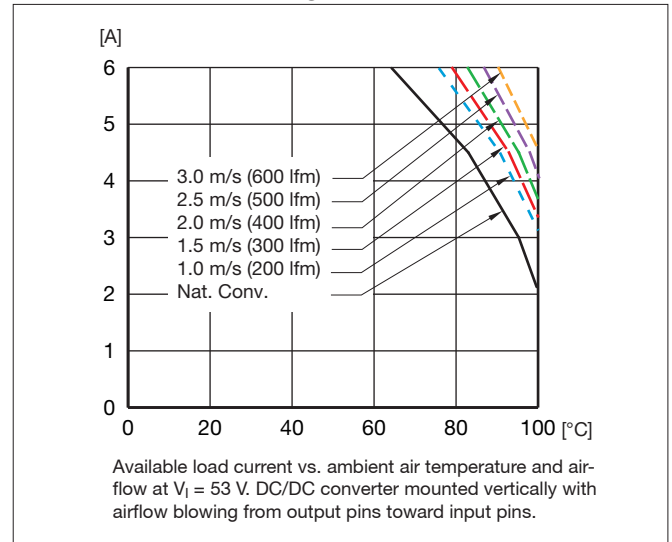


## Power Dissipation

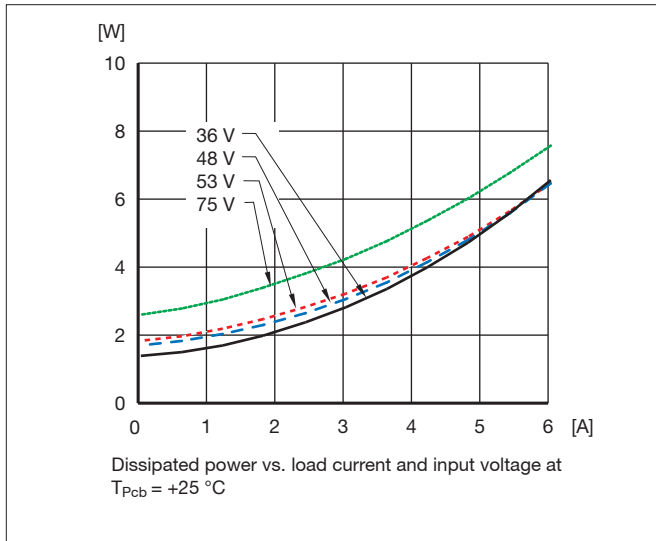

## Thermal Resistance

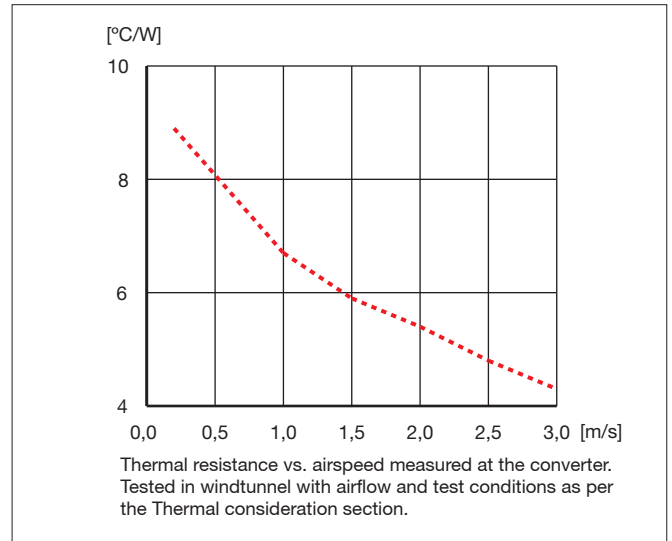


## Output Characteristic

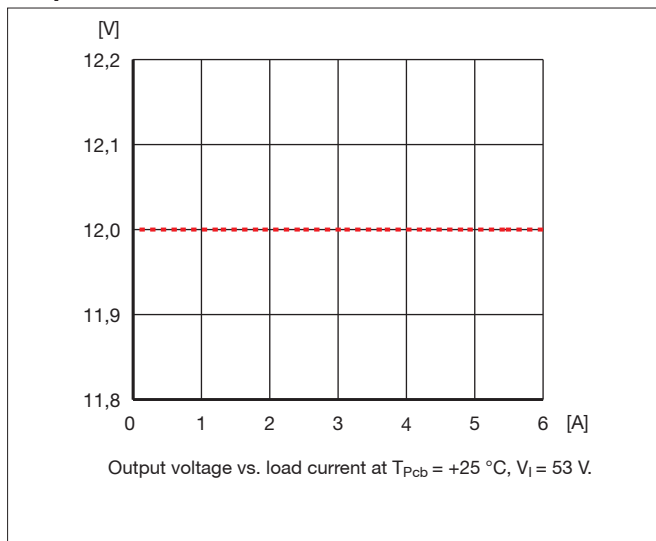


# PKB 4713 PINB - Typical Characteristics


## Start-Up

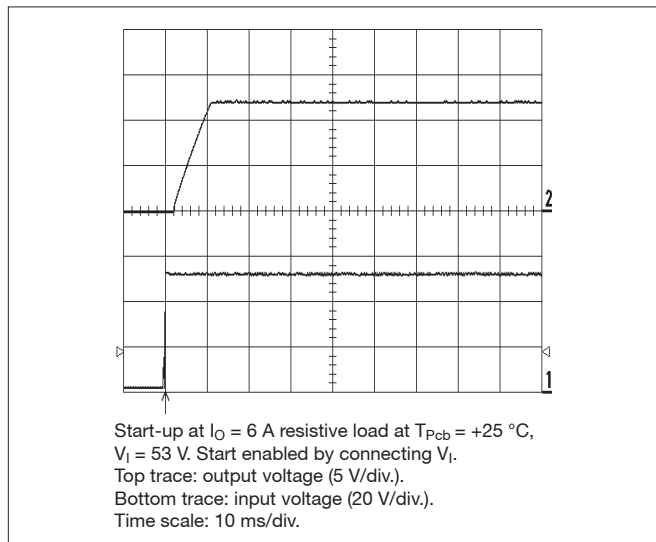


## Turn-Off

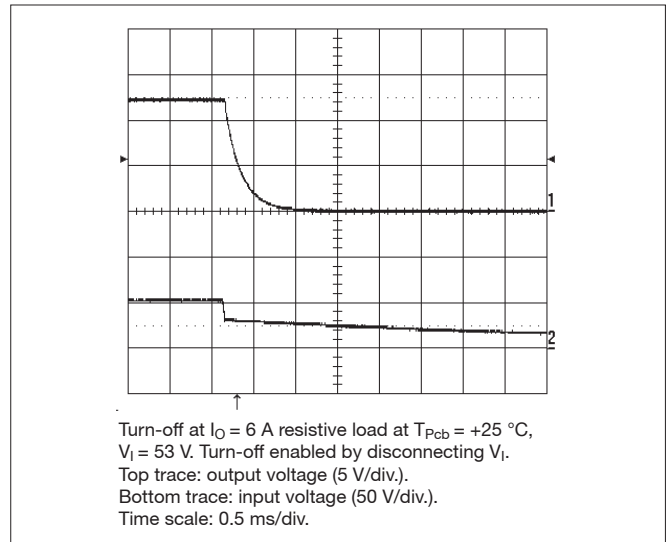

## Output Ripple

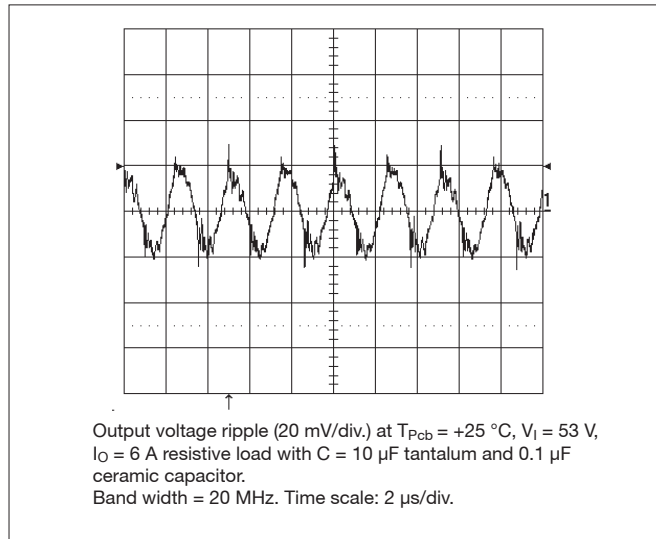

## Transient

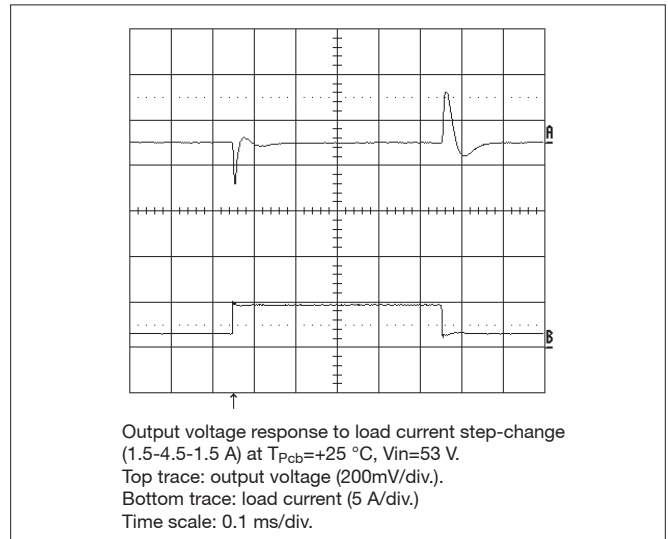

## Output Voltage Adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:


Output Voltage Adjust Upwards, Increase:  
 $R_{adj} = 5.11 \cdot ((12(100 + \Delta\%)) / (1.225\Delta\% - (100 + 2\Delta\%) / \Delta\%))$  kOhm

Output Voltage Adjust Downwards, Decrease:  
 $R_{adj} = 5.11(100 / \Delta\% - 2)$  kOhm

Eg Increase 4%  $\Rightarrow V_{out} = 12.48 V_{dc}$   
 $5.11(12(100 + 4) / (1.225 \times 4 - (100 + 2 \times 4) / 4)) = 1164$  kOhm

Eg Decrease 2%  $\Rightarrow V_{out} = 11.76 V_{dc}$   
 $5.11(100 / 2 - 2) = 245$  kOhm

## Output Voltage Adjust

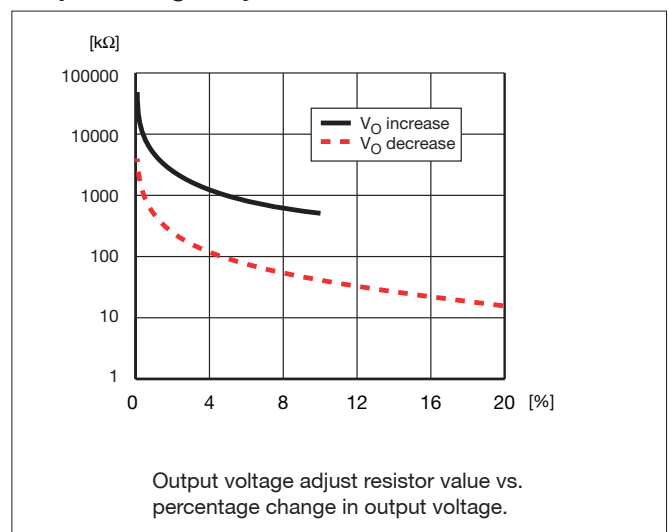


## PKB 4913 PINB – 12 V Data

$T_{Pcb} = -40...+90^{\circ}\text{C}$ ,  $V_I = 38...75\text{V}$ , sense pins connected to output pins unless otherwise specified.


Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O_i}$	Output voltage initial setting and accuracy	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	11.80	12	12.25	V
	Output adjust range	$I_O = I_{Omax}$ , $V_I = 53\text{V}$ , $T_{Pcb} = 25^{\circ}\text{C}$	9.6		13.2	V
$V_O$	Output voltage tolerance band	$I_O = 0.1...1 \times I_{Omax}$	11.75		12.30	V
	Idling voltage	$I_O = 0$	11.75		12.30	V
	Line regulation	$I_O = I_{Omax}$		3	20	mV
	Load regulation	$V_I = 53\text{V}$ , $I_O = (0.01...1.0) \times I_{Omax}$		3	10	mV
$V_{tr}$	Load transient voltage deviation	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ Load step = $0.5 \times I_{Omax}$		$\pm 300$		mV
$t_{tr}$	Load transient recovery time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$ loadstep = $0.5 \times I_{Omax}$		100		$\mu\text{s}$
$t_r$	Ramp-up time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$		10	15	ms
$t_s$	Start-up time	$V_I$ connection to $0.9 \times V_{O_i}$ , $I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{V}$		15	20	ms
$I_O$	Output current		0		7.5	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$	90			W
$I_{lim}$	Current limit threshold	$T_{Pcb} < T_{Pcbmax}$		8.8		A
$I_{sc}$	Short circuit current	$T_{Pcb} = 25^{\circ}\text{C}$ , $V_O < 0.5\text{V}$		11		A
$V_{Oac}$	Output ripple & noise	See ripple and noise, $I_{Omax}$ , $V_{Onom}$		50	100	$\text{mV}_{p-p}$
SVR	Supply voltage rejection (ac)	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ $f = 100\text{Hz}$ sinewave, $1\text{V}_{p-p}$		56		dB
OVP	Over voltage protection	$V_I = 53\text{V}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $T_{Pcb} = +25^{\circ}\text{C}$ .	15		17	V
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = 0.5 \times I_{Omax}$		91.5		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 48\text{V}$ , $I_O = I_{Omax}$		90.5		%
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = 0.5 \times I_{Omax}$		91.5		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	89	90.5		%
$P_d$	Power Dissipation	$T_{Pcb} = +25^{\circ}\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$		9.4		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		200		kHz

# PKB 4913 PINB - Typical Characteristics


## Efficiency

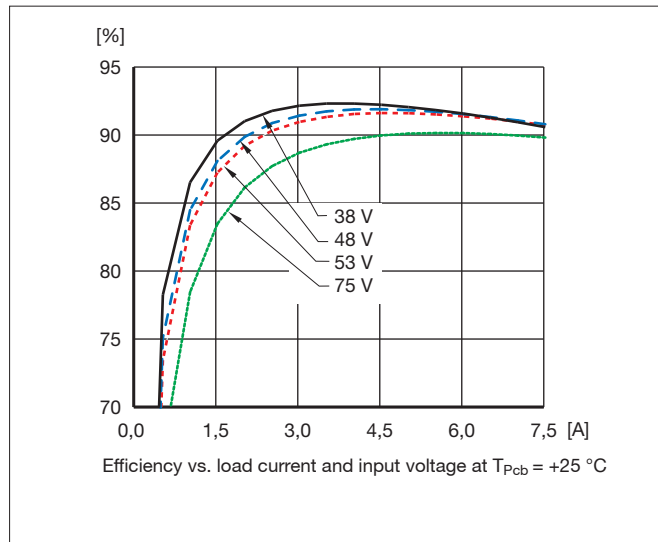


## Output Current Derating

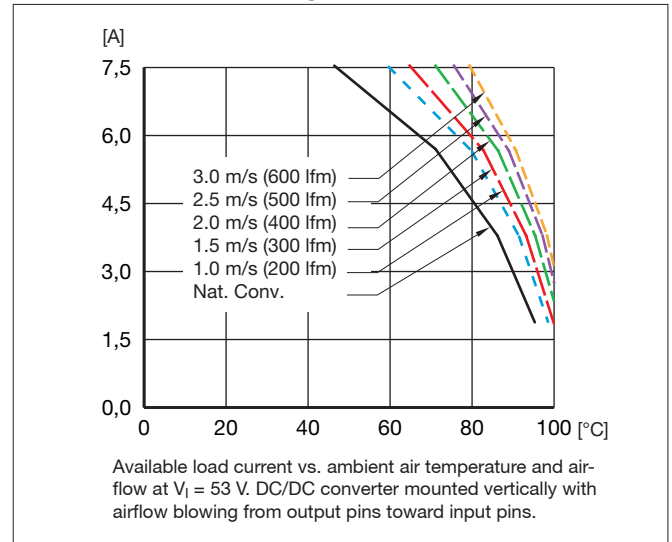


## Power Dissipation

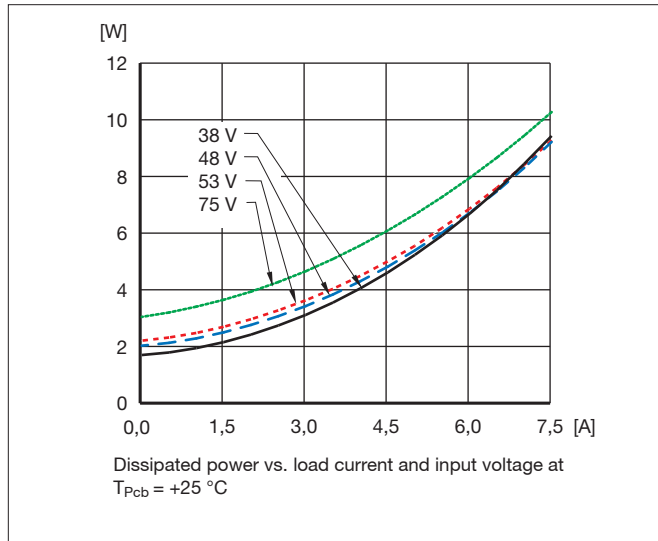

## Thermal Resistance

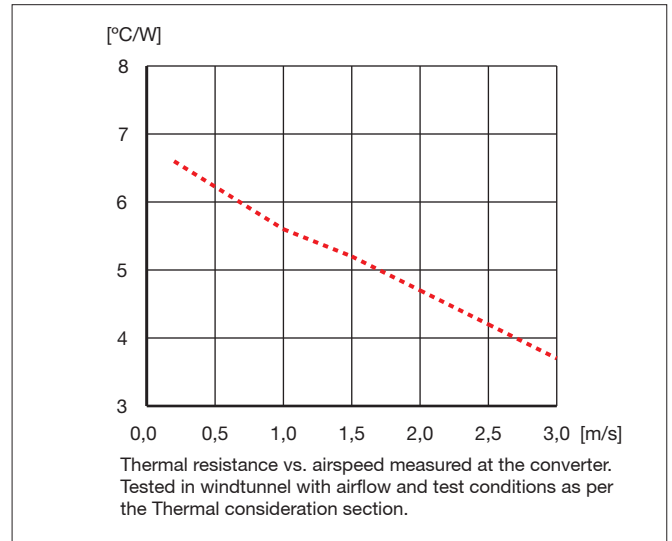


## Output Characteristic

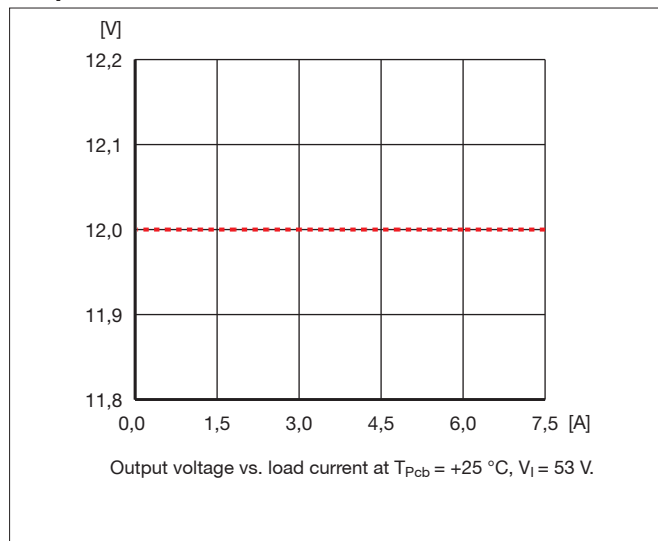




# PKB 4913 PINB - Typical Characteristics


## Start-Up

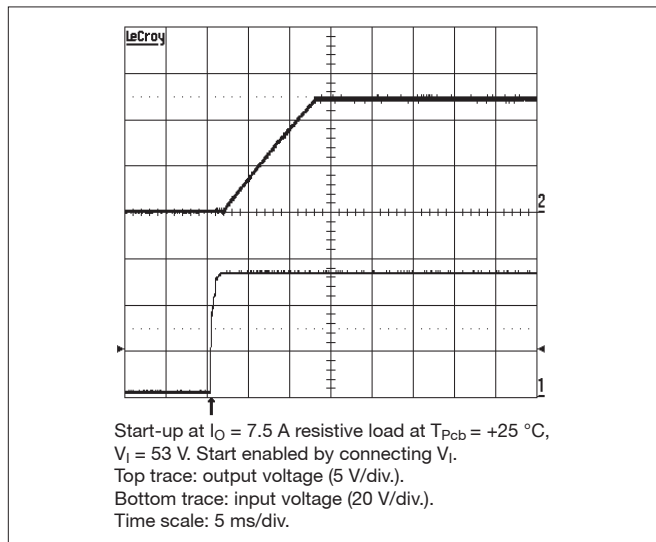


## Turn-Off

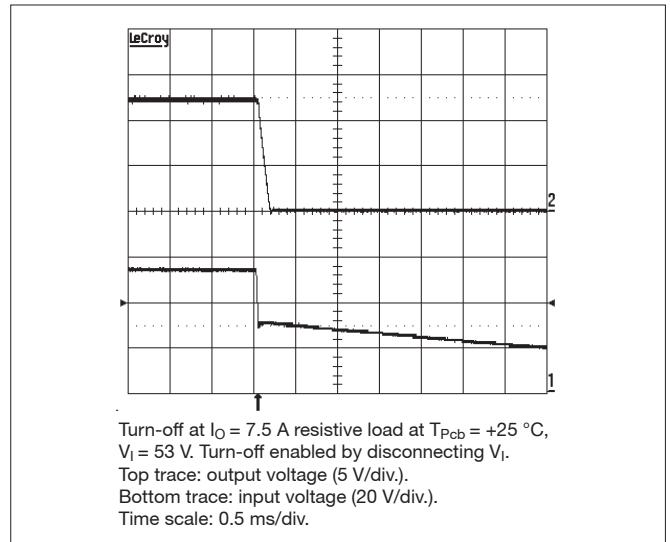

## Output Ripple

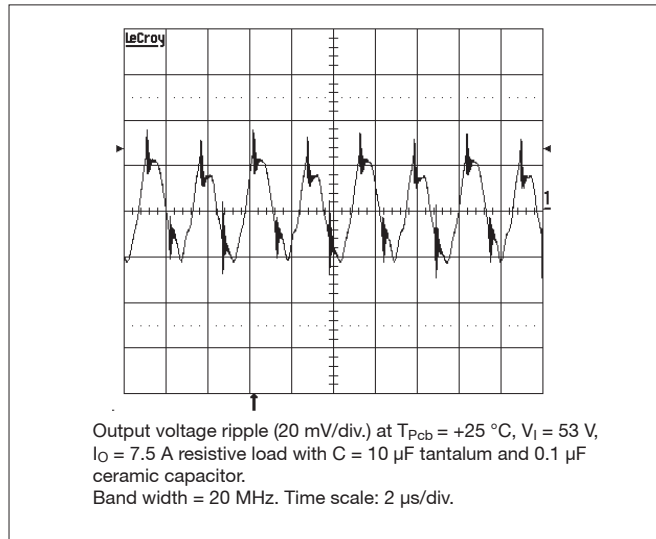

## Transient

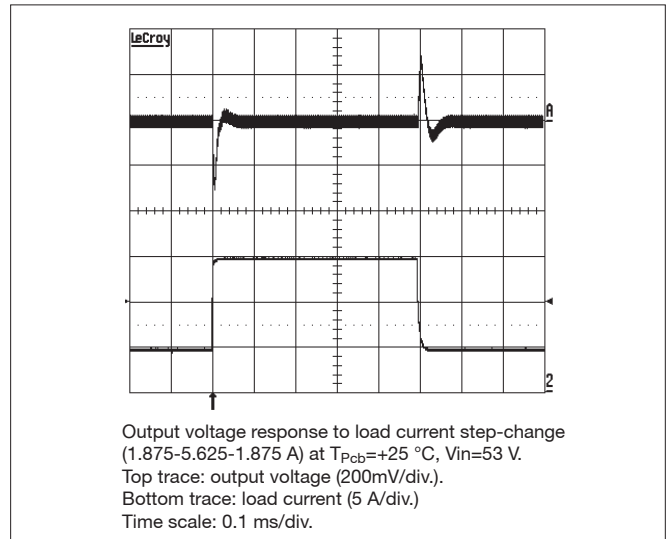

## Output Voltage Adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:


Output Voltage Adjust Upwards, Increase:  
 $R_{adj} = 5.11 \cdot ((12(100 + \Delta\%)) / (1.225\Delta\% - (100 + 2\Delta\%) / \Delta\%))$  kOhm

Output Voltage Adjust Downwards, Decrease:  
 $R_{adj} = 5.11(100 / \Delta\% - 2)$  kOhm

Eg Increase 4%  $\Rightarrow V_{out} = 12.48 V_{dc}$   
 $5.11(12(100 + 4) / (1.225 \times 4 - (100 + 2 \times 4) / 4)) = 1164$  kOhm

Eg Decrease 2%  $\Rightarrow V_{out} = 11.76 V_{dc}$   
 $5.11(100 / 2 - 2) = 245$  kOhm

## Output Voltage Adjust

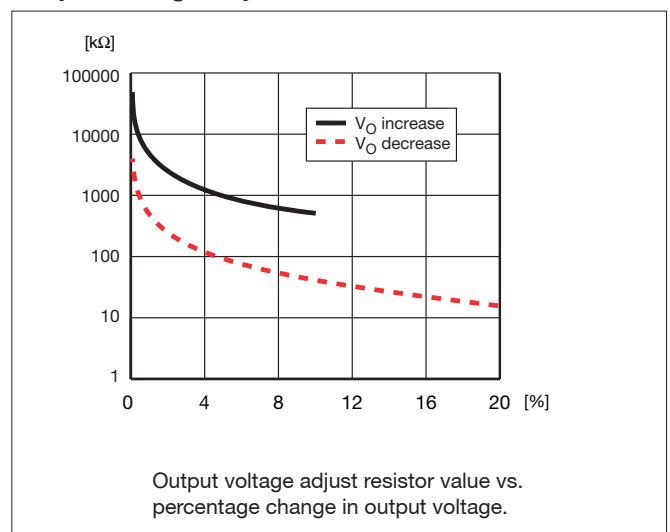


## PKB 4715 PINB - 15 V Data

$T_{Pcb} = -40...+90\text{ }^{\circ}\text{C}$ ,  $V_I = 38...75\text{ V}$ , sense pins connected to output pins unless otherwise specified.


Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O_i}$	Output voltage initial setting and accuracy	$T_{Pcb} = +25\text{ }^{\circ}\text{C}$ , $V_I = 53\text{ V}$ , $I_O = I_{Omax}$	14.70	15	15.30	V
	Output adjust range	$I_O = I_{Omax}$ , $V_I = 53\text{ V}$ , $T_{Pcb} = 25\text{ }^{\circ}\text{C}$	12.0		16.5	V
$V_O$	Output voltage tolerance band	$I_O = 0.1...1 \times I_{Omax}$	14.55		15.45	V
	Idling voltage	$I_O = 0$	14.55		15.45	V
	Line regulation	$I_O = I_{Omax}$		3	10	mV
	Load regulation	$V_I = 53\text{ V}$ , $I_O = (0.01...1.0) \times I_{Omax}$		3	10	mV
$V_{tr}$	Load transient voltage deviation	$I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $V_I = 53\text{ V}$ Load step = $0.5 \times I_{Omax}$		$\pm 400$		mV
$t_{tr}$	Load transient recovery time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{ V}$ loadstep = $0.5 \times I_{Omax}$		50		$\mu\text{s}$
$t_r$	Ramp-up time	$I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{ V}$		10	15	ms
$t_s$	Start-up time	$V_I$ connection to $0.9 \times V_{O_i}$ , $I_O = (0.1...1.0) \times I_{Omax}$ , $V_I = 53\text{ V}$		15	20	ms
$I_O$	Output current		0		5	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$	75			W
$I_{lim}$	Current limit threshold	$T_{Pcb} < T_{Pcbmax}$		6		A
$I_{sc}$	Short circuit current	$T_{Pcb} = 25\text{ }^{\circ}\text{C}$ , $V_O < 0.5\text{ V}$		7.5		A
$V_{Oac}$	Output ripple & noise	See ripple and noise, $I_{Omax}$ , $V_{Onom}$		50	150	$\text{mV}_{p-p}$
SVR	Supply voltage rejection (ac)	$T_{Pcb} = +25\text{ }^{\circ}\text{C}$ , $V_I = 53\text{ V}$ $f = 100\text{Hz}$ sinewave, $1\text{ V}_{p-p}$		65		dB
OVP	Over voltage protection	$V_I = 53\text{ V}$ , $I_O = (0.1 \dots 1.0) \times I_{Omax}$ , $T_{Pcb} = +25\text{ }^{\circ}\text{C}$ .	18		20	V
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25\text{ }^{\circ}\text{C}$ , $V_I = 48\text{ V}$ , $I_O = 0.5 \times I_{Omax}$		91.5		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25\text{ }^{\circ}\text{C}$ , $V_I = 48\text{ V}$ , $I_O = I_{Omax}$		92		%
$\eta$	Efficiency - 50% load	$T_{Pcb} = +25\text{ }^{\circ}\text{C}$ , $V_I = 53\text{ V}$ , $I_O = 0.5 \times I_{Omax}$		91.5		%
$\eta$	Efficiency - 100% load	$T_{Pcb} = +25\text{ }^{\circ}\text{C}$ , $V_I = 53\text{ V}$ , $I_O = I_{Omax}$	90	92		%
$P_d$	Power Dissipation	$T_{Pcb} = +25\text{ }^{\circ}\text{C}$ , $V_I = 53\text{ V}$ , $I_O = I_{Omax}$		6.3		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		195		kHz

# PKB 4715 PINB - Typical Characteristics


## Efficiency

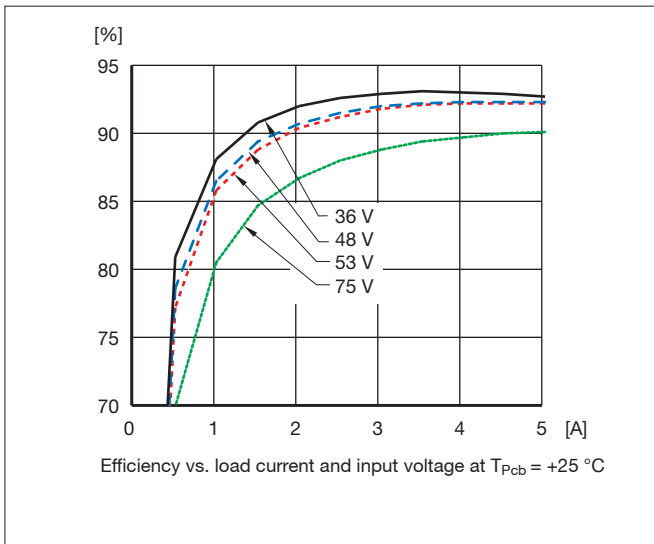


## Output Current Derating

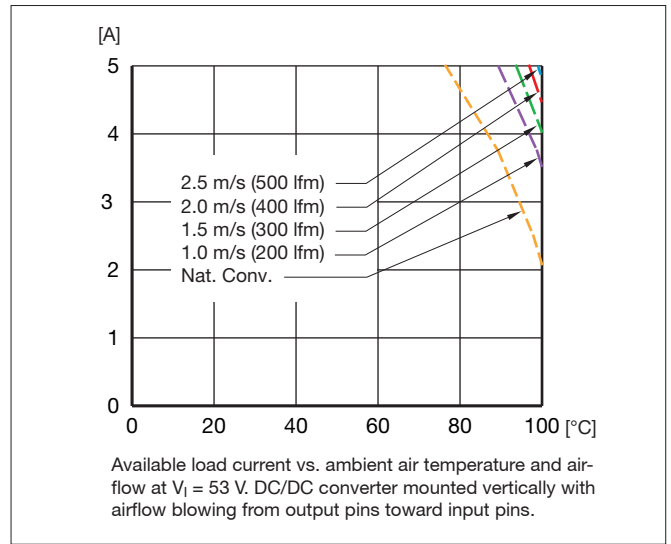


## Power Dissipation

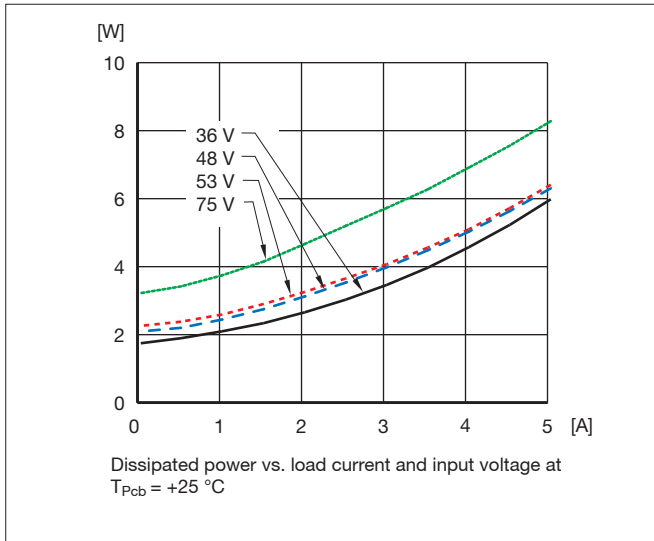

## Thermal Resistance

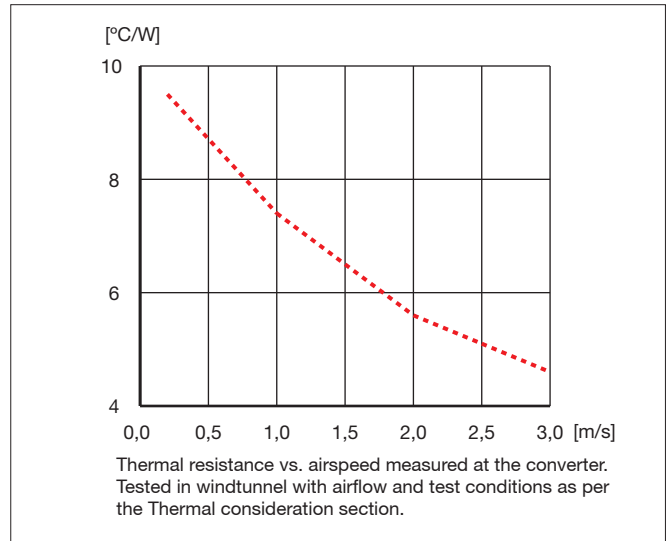


## Output Characteristic

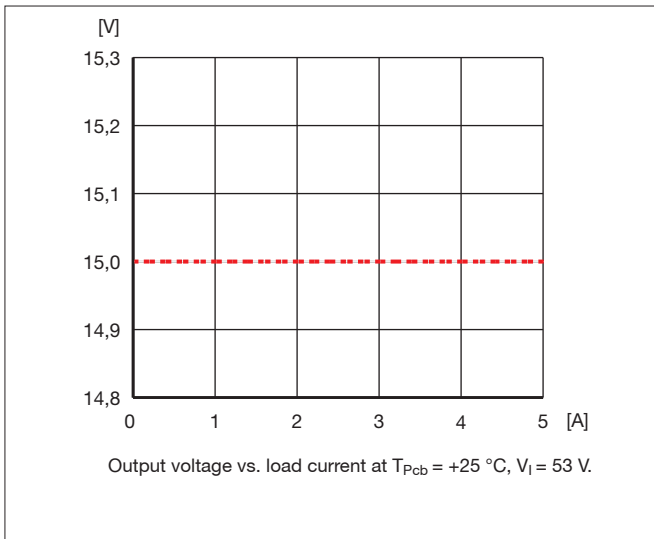


# PKB 4715 PINB - Typical Characteristics


## Start-Up

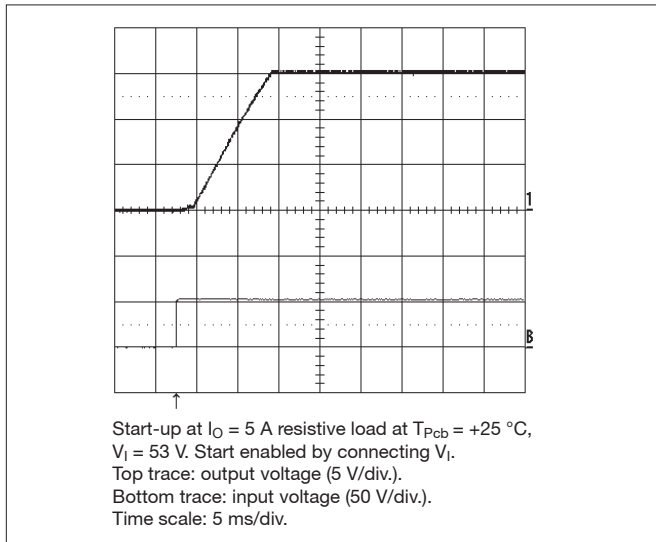


## Turn-Off

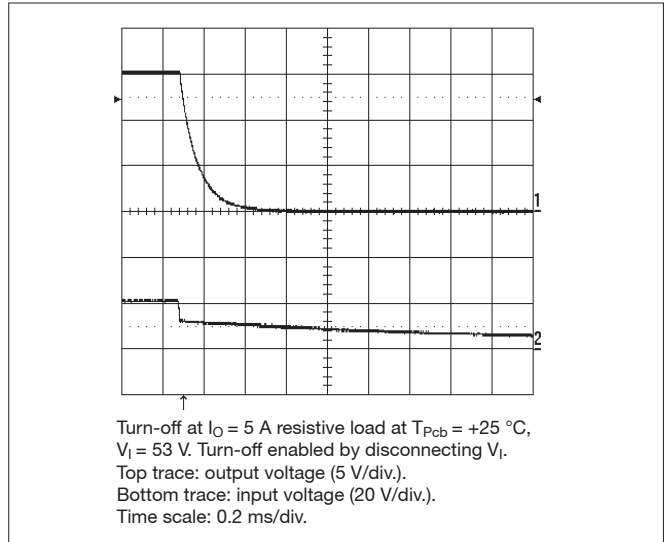

## Output Ripple

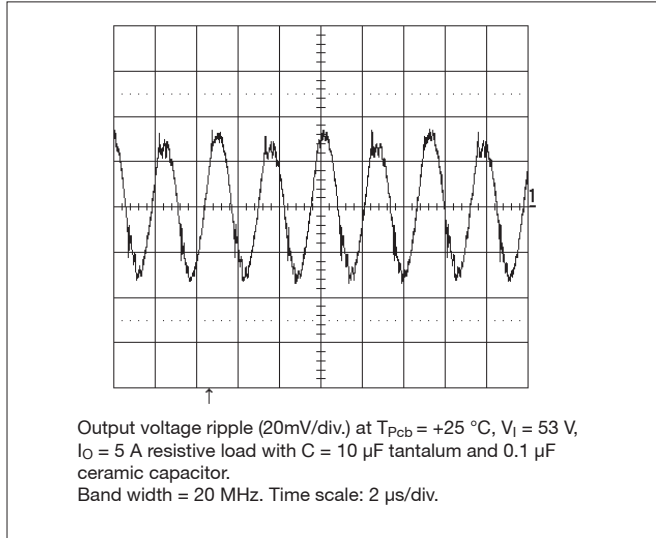

## Transient

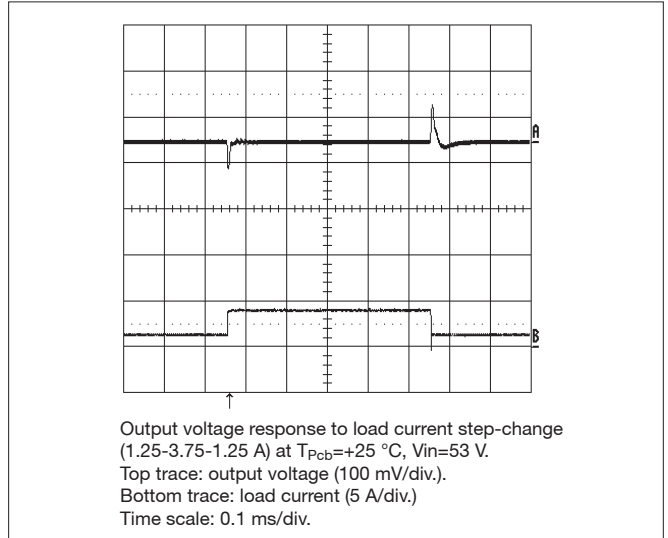

## Output Voltage Adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:


Output Voltage Adjust Upwards, Increase:  
 $R_{adj} = 5.11 \cdot ((15(100 + \Delta\%)) / 1.225 \Delta\% - (100 + 2\Delta\%) / \Delta\%)$  kOhm

Output Voltage Adjust Downwards, Decrease:  
 $R_{adj} = 5.11(100 / \Delta\% - 2)$  kOhm

Eg Increase 4%  $\Rightarrow V_{out} = 15.60 V_{dc}$   
 $5.11(15(100 + 4) / 1.225 \times 4 - (100 + 2 \times 4) / 4) = 1489$  kOhm

Eg Decrease 2%  $\Rightarrow V_{out} = 14.70 V_{dc}$   
 $5.11(100 / 2 - 2) = 245$  kOhm

## Output Voltage Adjust

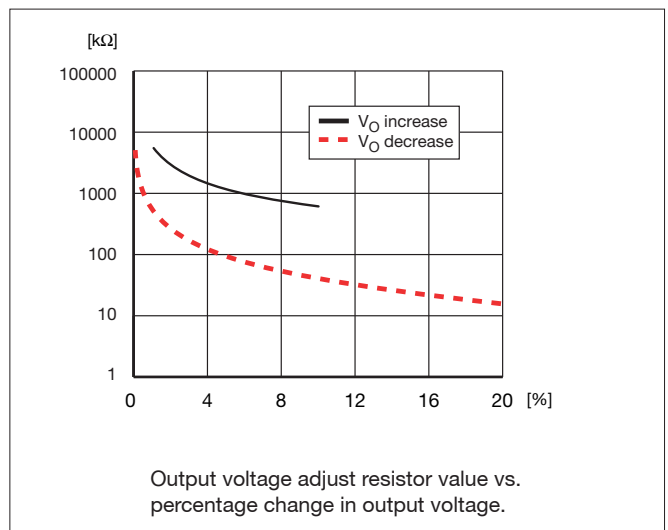


## EMC Specification

The conducted EMI measurement was performed using a module placed directly on the test bench.

The fundamental switching frequency is 195 kHz for PKB 4711 PINB @  $V_I = 53V$ ,  $I_O = (0.1 \dots 1.0) \times I_{Omax}$ .



### Conducted EMI Input terminal value (typ)

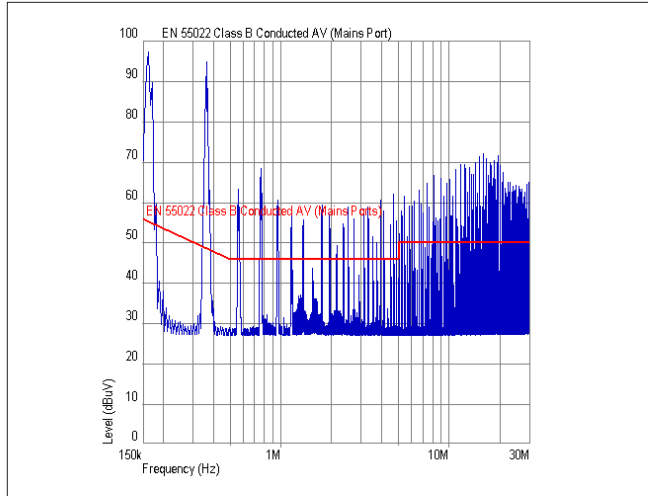


EMI without filter

### External filter (class B)

Required external input filter in order to meet class B in EN 55022, CISPR 22 and FCC part 15J.

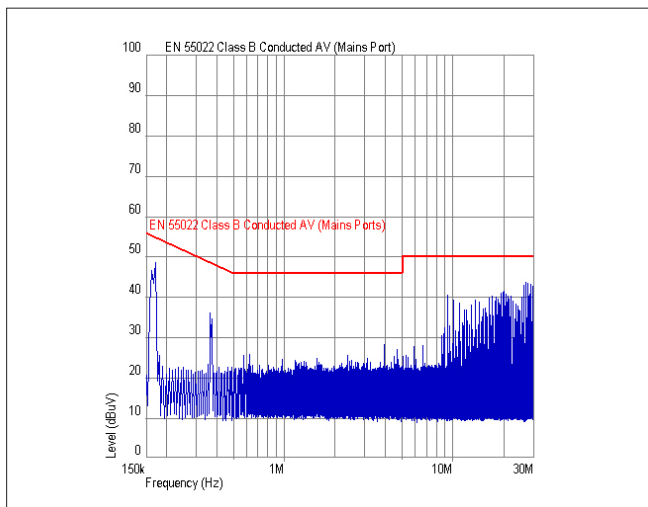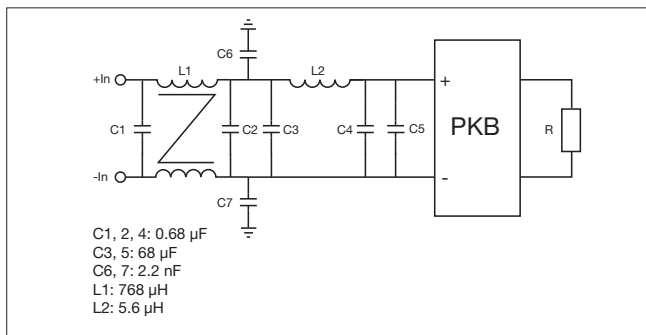

EMI with filter

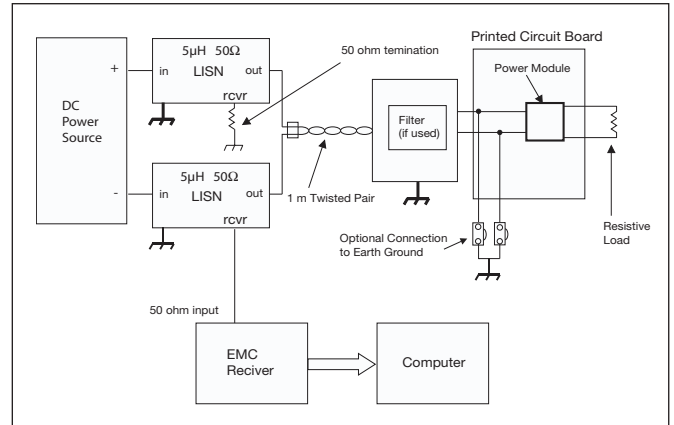


Test set-up.

### Layout Recommendation

The radiated EMI performance of the DC/DC converter will be optimised by including a ground plane in the PCB area under the DC/DC converter. This approach will return switching noise to ground as directly as possible, with improvements to both emissions and susceptibility. It is also important to consider the stand-off of the PKB 4000 series DC/DC converter. If one ground trace is used, it should be connected to the input return. Alternatively, two ground traces may be used, with the trace under the input side of the DC/DC converter connected to the input return and the trace under the output side of the DC/DC converter connected to the output return. Make sure to use appropriate safety isolation spacing between these two return traces. The use of two traces as described will provide the capability of routing the input noise and output noise back to their respective returns.

### Output ripple and noise

The circuit below has been used for the ripple and noise measurements on the PKB 4000 Series DC/DC converters.

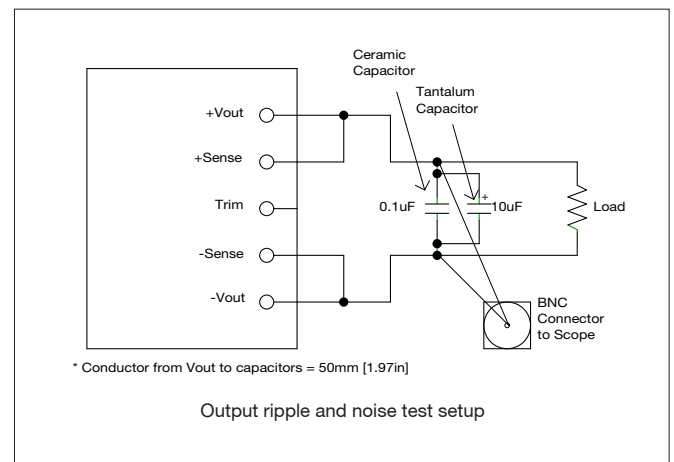

## Operating Information


### Input Voltage

The input voltage range 36...75Vdc meets the requirements of the European Telecom Standard ETS 300 132-2 for normal input voltage range in -48V and -60V DC systems, -40.5...-57.0V and -50.0...-72V respectively. At input voltages exceeding 75V, the power loss will be higher than at normal input voltage and  $T_{Pcb}$  must be limited to absolute max +110°C. The absolute maximum continuous input voltage is 80Vdc.

### Turn-Off Input Voltage

The PKB 4000 Series DC/DC converters monitor the input voltage and will turn on and turn off at predetermined levels. The minimum hysteresis between turn on and turn off input voltage is 1V where the turn on input voltage is the highest.

### Remote Control (RC)



The PKB 4000 Series DC/DC converters have a remote control function referenced to the primary side (- In), with negative and positive logic options available. The RC function allows the converter to be turned on/off by an external device like a semiconductor or mechanical switch. The RC pin has an internal pull up resistor to + In. The needed maximum sink current is 1mA. When the RC pin is left open,

the voltage generated on the RC pin is 12 - 15 V. The maximum allowable leakage current of the switch is 20  $\mu$ A.

The standard converter is provided with "negative logic" remote control and the converter will be off until the RC pin is connected to the - In. To turn on the converter the voltage between RC pin and - In should be less than 1V. To turn off the converter the RC pin should be left open, or connected to a voltage higher than 13 V referenced to - In. In situations where it is desired to have the converter to power up automatically without the need for control signals or a switch, the RC pin can be wired directly to - In.


The second option is "positive logic" remote control, which can be ordered by adding the suffix "P" to the end of the part number. The converter will turn on when the input voltage is applied with the RC pin open. Turn off is achieved by connecting the RC pin to the - In. To ensure safe turn off the voltage difference between RC pin and the - In pin shall be less than 1V. The converter will restart automatically when this connection is opened.

### Remote Sense

All PKB 4000 Series DC/DC converters have remote sense that can be used to compensate for moderate amounts of resistance in the distribution system and allow for voltage regulation at the load or other selected point. The remote sense lines will carry very little current and do not need a large cross sectional area. However, the sense lines on the PCB should be located close to a ground trace or ground plane. In a discrete wiring situation, the use of twisted pair wires or other technique to reduce noise susceptibility is highly recommended. The remote sense circuitry will compensate for up to 10% voltage drop between the sense voltage and the voltage at the output pins. The output voltage and the remote sense voltage offset must be less than the minimum over voltage trip point. If the remote sense is not needed the -Sense should be connected to -Out and +Sense should be connected to +Out.

### Output Voltage Adjust ( $V_{adj}$ )

All PKB 4000 Series DC/DC converters have an Output Voltage adjust pin ( $V_{adj}$ ). This pin can be used to adjust the output voltage above or below Output voltage initial setting. When increasing the output voltage, the voltage at the output pins (including any remote sense offset) must be kept below the overvoltage trip point, to prevent the converter from shut down. Also note that at increased output voltages the maximum power rating of the converter remains the same, and the output current capability will decrease correspondingly. To decrease the output voltage the resistor should be connected between  $V_{adj}$  pin and -Sense pin. To increase the voltage the resistor should be connected between  $V_{adj}$  pin and +Sense pin. The resistor value of the Output voltage adjust function is according to information given under the output section.

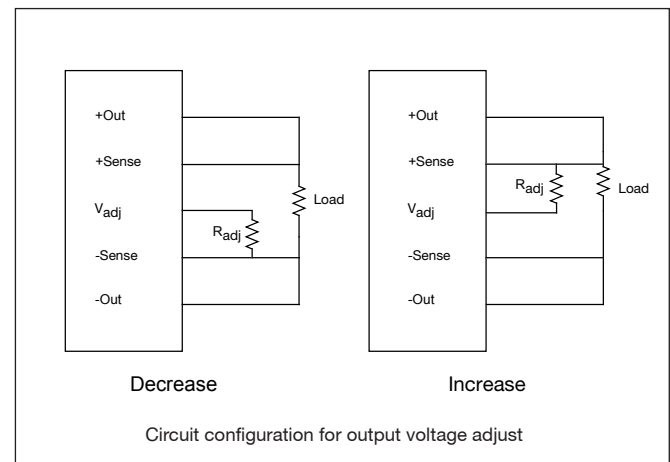

## Operating Information

### Current Limit Protection

The PKB 4000 Series DC/DC converters include current limiting circuitry that allows them to withstand continuous overloads or short circuit conditions on the output. The output voltage will decrease towards zero for output currents in excess of max output current (I<sub>omax</sub>).

The converter will resume normal operation after removal of the overload. The load distribution system should be designed to carry the maximum output short circuit current specified.

### Over Voltage Protection (OVP)

The PKB 4000 Series DC/DC converters have output overvoltage protection. In the event of an overvoltage condition, the converter will shut down immediately. The converter will make continuous attempts to start up (non-latching mode) and resume normal operation automatically.

### Over Temperature Protection (OTP)

The PKB 4000 Series DC/DC converters are protected from thermal overload by an internal over temperature shutdown circuit. When the PCB temperature on the topside between the signal transformer and output choke (position P1 as defined in Thermal consideration section) exceeds 120 °C the converter will shut down immediately. The converter will make continuous attempts to start up (non-latching mode) and resume normal operation automatically when the temperature has dropped >10 °C below the temperature threshold.

### Input And Output Impedance

The impedance of both the power source and the load will interact with the impedance of the DC/DC converter. It is most important to have a low characteristic impedance, both at the input and output, as the converters have a low energy storage capability. The PKB 4000 Series DC/DC converters have been designed to be completely stable without the need for external capacitors on the input or the output circuits. The performance in some applications can be enhanced by addition of external capacitance as described under maximum capacitive load. If the distribution of the input voltage source to the converter contains significant inductance, the addition of a 100 µF capacitor across the input of the converter will help insure stability. This capacitor is not required when powering the DC/DC converter from a low impedance source with short, low inductance, input power leads.

### Maximum Capacitive Load

When powering loads with significant dynamic current requirements, the voltage regulation at the load can be improved by addition of decoupling capacitance at the load. The most affective technique is to locate low ESR ceramic capacitors as close to the load as possible, using several capacitors to lower the effective ESR. These ceramic capacitors will handle short duration high-frequency components of dynamic load changes. In addition, higher values of electrolytic capacitors should be used to handle the mid-frequency components. It is equally important to use good design practise when configuring the DC distribution system.

Low resistance and low inductance PCB layouts and cabling should be used. Remember that when using remote sensing, all resistance, inductance and capacitance of the distribution system is within the feedback loop of the converter. This can affect on the converters compensation and the resulting stability and dynamic response performance. As a "rule of thumb", 100µF/A of output current can be used without any additional analysis. For example with a 25A converter, values of decoupling capacitance up to 2500 µF can be used without regard to stability. With larger values of capacitance, the load transient recovery time can exceed the specified value. As much of the capacitance as possible should be outside the remote sensing loop and close to the load. The absolute maximum value of output capacitance is 10 000 µF. For values larger than this, please contact your local Ericsson Power Modules representative.

### Parallel Operation

The PKB 4000 Series DC/DC converters can be paralleled for redundancy if external o-ring diodes are used in series with the outputs. It is not recommended to parallel the PKB 4000 Series DC/DC converters for increased power without using external current sharing circuits.


## Thermal Consideration

### General

The PKB 4000 series DC/DC converters are designed to operate in a variety of thermal environments, however sufficient cooling should be provided to help ensure reliable operation. Heat is removed by conduction, convection and radiation to the surrounding environment. Increased airflow enhances the heat transfer via convection. The available load current vs. ambient air temperature and airflow at  $V_{in}=53\text{ V}$  for each model is according to the information given under the output section. The test is done in a wind tunnel with a cross section of 305 x 305 mm, the DC/DC converter vertically mounted on a 8 layer PCB with a size of 254 x 254 mm, each layer with 35  $\mu\text{m}$  (1 oz) copper. Proper cooling can be verified by measuring the temperature of selected devices. Peak temperature can occur at positions P1, P2 and P3. The temperature at these positions should not exceed the recommended max values.

Note that the recommended max value is the absolute maximum rating (non destruction) and that the electrical output data is guaranteed up to  $T_{Pcb} + 90\text{ }^{\circ}\text{C}$ .

Position	Device	$T_{critical}$	Recommended max value
P1	Pcb		110 $^{\circ}\text{C}$
P2	mosfet	$T_{surface}$	120 $^{\circ}\text{C}$
P3	mosfet	$T_{surface}$	120 $^{\circ}\text{C}$

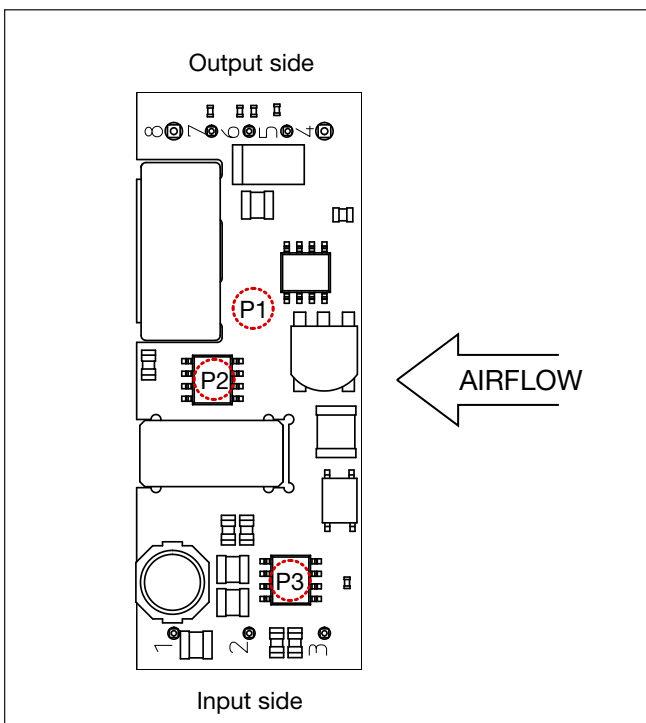

### Calculation of ambient temperature

By using the thermal resistance the maximum allowed ambient temperature can be calculated.

1. The powerloss is calculated by using the formula  $((1/\eta) - 1) \times \text{output power} = \text{power losses}$ .  
 $\eta$  = efficiency of converter. E.g 89.5% = 0.895
2. Find the value of the thermal resistance for each product in the diagram by using the airflow speed at the output section of the converter. Take the thermal resistance x powerloss to get the temperature increase.
3. Max allowed calculated ambient temperature is: Max  $T_{PCB}$  of DC/DC converter – temperature increase.

E.g PKB 4610 PINB at 1m/s:

$$A. ((\frac{1}{0.895}) - 1) \times 66\text{ W} = 7.74\text{ W}$$

$$B. 7.74\text{ W} \times 5.0\text{ }^{\circ}\text{C/W} = 38.7\text{ }^{\circ}\text{C}$$

$$C. 110\text{ }^{\circ}\text{C} - 38.7\text{ }^{\circ}\text{C} = \text{max ambient temperature is } 71.3\text{ }^{\circ}\text{C}$$

The real temperature will be dependent on several factors, like PCB size and type, direction of airflow, air turbulence etc. It is recommended to verify the temperature by testing.



## Soldering Information

The PKB 4000 Series DC/DC converters are intended for through hole mounting on a PCB. When wave soldering is used max temperature on the pins is specified to 260°C for 10 seconds. Maximum preheat rate of 4°C/s and temperature of max 130°C is suggested. When hand soldering, care should be taken to avoid direct contact between the hot soldering iron tip and the pins for more than a few seconds in order to prevent overheating.

No-clean flux is recommended to avoid entrapment of cleaning fluids in cavities inside of the DC/DC power module. The residues may affect long time reliability and isolation voltage.

## Delivery Package Information

PKB 4000 series standard delivery package is a 100 pcs box.  
(one box contains 5 full clamshells)

## Clamshell Specification

Material:	PET
Max surface resistance:	10 <sup>12</sup> Ohm/sq
Color:	Transparent
Capacity:	20 pcs/clamshell
Weight:	135 g (typ)

## Compatibility with RoHS requirements

The products are compatible with the relevant clauses and requirements of the RoHS directive 2002/95/EC and have a maximum concentration value of 0.1% by weight in homogeneous materials for lead, mercury, hexavalent chromium, PBB and PBDE and of 0.01% by weight in homogeneous materials for cadmium.

Exemptions in the RoHS directive utilized in Ericsson Power Modules products include:

- Lead in high melting temperature type solder (used to solder the die in semiconductor packages)
- Lead in glass of electronics components and in electronic ceramic parts (e.g. fill material in chip resistors)
- Lead as an alloying element in copper alloy containing up to 4% lead by weight (used in connection pins made of Brass)

## Reliability

The Mean Time Between Failure (MTBF) of the PKB 4000 series DC/DC converter is calculated at full output power and an operating ambient temperature ( $T_A$ ) of +40°C. Different methods could be used to calculate the predicted MTBF and failure rate which may give different results. Ericsson Power Modules currently uses two different methods, Ericsson failure rate data system DependTool and Telcordia SR332.

Predicted MTBF for the PKB 4000 series products is:

- 3.5 million hours according to DependTool.
- 1.5 million hours according to Telcordia SR332, issue 1, Black box technique.

The Ericsson failure rate data system is based on field tracking data. The data corresponds to actual failure rates of components used in Information Technology and Telecom (IT&T) equipment in temperature controlled environments ( $T_A = -5...+65^\circ\text{C}$ ). Telcordia SR332 is a commonly used standard method intended for reliability calculations in IT&T equipment. The parts count procedure used in this method was originally modeled on the methods from MIL-HDBK-217F, Reliability Predictions of Electronic Equipment. It assumes that no reliability data is available on the actual units and devices for which the predictions are to be made, i.e. all predictions are based on generic reliability parameters.

## Quality Statement

The PKB 4000 series DC/DC converters are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000, 6 $\sigma$  (sigma), and SPC are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out and they are subjected to an ATE-based final test. Conservative design rules, design reviews and product qualifications, plus the high competence of an engaged work force, contribute to the high quality of our products.

## Limitation of Liability

Ericsson Power Modules does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

## Sales Offices and Contact Information

Company Headquarters  
Ericsson Power Modules AB  
LM Ericssons väg 30  
SE-126 25 Stockholm  
Sweden

Phone: +46-8-568-69620  
Fax: +46-8-568-69599

China  
Ericsson Simtek Electronics Co.  
33 Fuhua Road  
Jiading District  
Shanghai 201 818  
China

Phone: +86-21-5990-3258  
Fax: +86-21-5990-0188

Germany, Austria  
Ericsson Power Modules AB  
Mühlhauser Weg 18  
85737 Ismaning  
Germany

Phone: +49-89-9500-6905  
Fax: +49-89-9500-6911

Hong Kong (Asia Pacific)  
Ericsson Ltd.  
12/F. Devon House  
979 King's Road  
Quarry Bay  
Hong Kong

Phone: +852-2590-2453  
Fax: +852-2590-7152

Italy, Spain (Mediterranean)  
Ericsson Power Modules AB  
Via Cadorna 71  
20090 Vimodrone (MI)  
Italy

Phone: +39-02-265-946-07  
Fax: +39-02-265-946-69

Japan  
Ericsson Power Modules AB  
Kimura Daini Building, 3 FL.  
3-29-7 Minami-Oomachi, Shinagawa-ka  
Tokyo 140-0013  
Japan

Phone: +81-3-5733-5107  
Fax: +81-3-5753-5162

North and South America  
Ericsson Inc. Power Modules  
6300 Legacy Dr.  
Plano, TX 75024  
USA

Phone: +1-972-583-5254  
+1-972-583-6910  
Fax: +1-972-583-7839

All other countries  
Contact Company Headquarters  
or visit our website:  
[www.ericsson.com/powermodules](http://www.ericsson.com/powermodules)

Information given in this data sheet is believed to be accurate and reliable.  
No responsibility is assumed for the consequences of its use nor for any infringement  
of patents or other rights of third parties which may result from its use.  
No license is granted by implication or otherwise under any patent or patent rights of  
Ericsson Power Modules. These products are sold only according to  
Ericsson Power Modules' general conditions of sale, unless otherwise confirmed in  
writing. Specifications subject to change without notice.