

Socket strip - SFLY 2,5/F32/ZB - 2285506

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



19" socket strip, nominal current: 4 A, number of positions: 32, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, color: green, contact surface: Gold

Your advantages

- ✓ Easy field connection to connectors according to IEC 60603/DIN 41617
- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 017918 055967 |
| GTIN | 4017918055967 |
| Weight per Piece (excluding packing) | 94.300 g |
| Custom tariff number | 85369010 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|---------------|---------|
| Length | 40 mm |
| Height | 35.5 mm |
| Width | 95 mm |
| Pitch | 5.08 mm |
| Hole diameter | 2.8 mm |

General

Socket strip - SFLY 2,5/F32/ZB - 2285506

Technical data

General

| | |
|--|---------------------|
| Range of articles | SFLY 2,5 |
| Insulating material group | I |
| Rated surge voltage (III/3) | 4 kV |
| Connection in acc. with standard | EN-VDE |
| Nominal current I _N | 4 A |
| Nominal voltage U _N | 250 V |
| Nominal cross section | 2.5 mm ² |
| Insulating material | PA |
| Flammability rating according to UL 94 | V2 |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |
| Number of positions | 32 |

Connection data

| | |
|---------------------------------------|---------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 12 |

Standards and Regulations

| | |
|--|--------|
| Connection in acc. with standard | EN-VDE |
| Flammability rating according to UL 94 | V2 |


Environmental Product Compliance

| | |
|------------|---|
| | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Socket strip - SFLY 2,5/F32/ZB - 2285506

Dimensional drawing

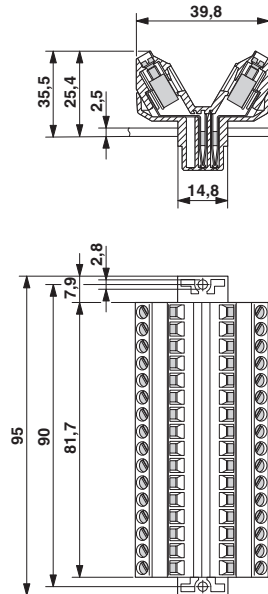

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27261100 |
| eCl@ss 6.0 | 27261100 |
| eCl@ss 7.0 | 27440401 |
| eCl@ss 8.0 | 27440401 |
| eCl@ss 9.0 | 27440401 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002498 |
| ETIM 5.0 | EC002643 |
| ETIM 6.0 | EC002643 |
| ETIM 7.0 | EC002643 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11 | 39121409 |

Socket strip - SFLY 2,5/F32/ZB - 2285506

Classifications

UNSPSC

| | |
|--------------|----------|
| UNSPSC 12.01 | 39121409 |
| UNSPSC 13.2 | 39121432 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

| | | |
|-----|---|---------|
| EAC |  | B.01742 |
|-----|---|---------|
