






RFE Part Number	Peak Repetitive Reverse Voltage	Max Avg Rectified Current	Max. Peak Fwd Surge Current	Forward Voltage Drop		Max Reverse Current	Outline			
	V <sub>RRM</sub>	I <sub>o</sub>	I <sub>FSM</sub>	V <sub>F@I<sub>F</sub></sub>		I <sub>R@V<sub>R</sub></sub>				
	V	A	A	V	A	μA				
<b>10.0 AMP Single-Phase Bridge Rectifiers</b>										
	KBU10005	50	10.0	300	10.0	5.0	10	 KBU		
	KBU1001	100	10.0	300	10.0	5.0	10			
	KBU1002	200	10.0	300	10.0	5.0	10			
	KBU1004	400	10.0	300	10.0	5.0	10			
	KBU1006	600	10.0	300	10.0	5.0	10			
	KBU1008	800	10.0	300	10.0	5.0	10			
	KBU1010	1000	10.0	300	10.0	5.0	10			
		GBU10005	50	10.0	220	10.0	5.0		10	 GBU
		GBU1001	100	10.0	220	10.0	5.0		10	
		GBU1002	200	10.0	220	10.0	5.0		10	
GBU1004		400	10.0	220	10.0	5.0	10			
GBU1006		600	10.0	220	10.0	5.0	10			
GBU1008		800	10.0	220	10.0	5.0	10			
GBU1010		1000	10.0	220	10.0	5.0	10			
		GBJ10005	50	10.0	220	10.0	5.0	10	 GBJ	
	GBJ1001	100	10.0	220	10.0	5.0	10			
	GBJ1002	200	10.0	220	10.0	5.0	10			
	GBJ1004	400	10.0	220	10.0	5.0	10			
	GBJ1006	600	10.0	220	10.0	5.0	10			
	GBJ1008	800	10.0	220	10.0	5.0	10			
	GBJ1008	800	10.0	220	10.0	5.0	10			
		KBJ10005	50	10.0	220	10.0	5.0	10		 KBJ
KBJ1001		100	10.0	220	10.0	5.0	10			
KBJ1002		200	10.0	220	10.0	5.0	10			
KBJ1004		400	10.0	220	10.0	5.0	10			
KBJ1006		600	10.0	220	10.0	5.0	10			
KBJ1008		800	10.0	220	10.0	5.0	10			
KBJ1010		1000	10.0	220	10.0	5.0	10			
		BR10005	50	10.0	200	10.0	5.0	10	 BR8	
		BR101	100	10.0	200	10.0	5.0	10		
		BR102	200	10.0	200	10.0	5.0	10		
	BR104	400	10.0	200	10.0	5.0	10			
	BR106	600	10.0	200	10.0	5.0	10			
	BR108	800	10.0	200	10.0	5.0	10			
	BR1010	1000	10.0	200	10.0	5.0	10			
		KBPC10005W	50	10.0	300	10.0	5.0	10		 KBPC
KBPC1001		100	10.0	300	10.0	5.0	10			
KBPC1002		200	10.0	300	10.0	5.0	10			
KBPC1004		400	10.0	300	10.0	5.0	10			
KBPC1006		600	10.0	300	10.0	5.0	10			
KBPC1008		800	10.0	300	10.0	5.0	10			
KBPC1010		1000	10.0	300	10.0	5.0	10			
		KBPC1005W	50	10.0	300	10.0	5.0	10	 KBPCW	
	KBPC1001W	100	10.0	300	10.0	5.0	10			
	KBPC1002W	200	10.0	300	10.0	5.0	10			
	KBPC1004W	400	10.0	300	10.0	5.0	10			
	KBPC1006W	600	10.0	300	10.0	5.0	10			
	KBPC1008W	800	10.0	300	10.0	5.0	10			
	KBPC1010W	1000	10.0	300	10.0	5.0	10			

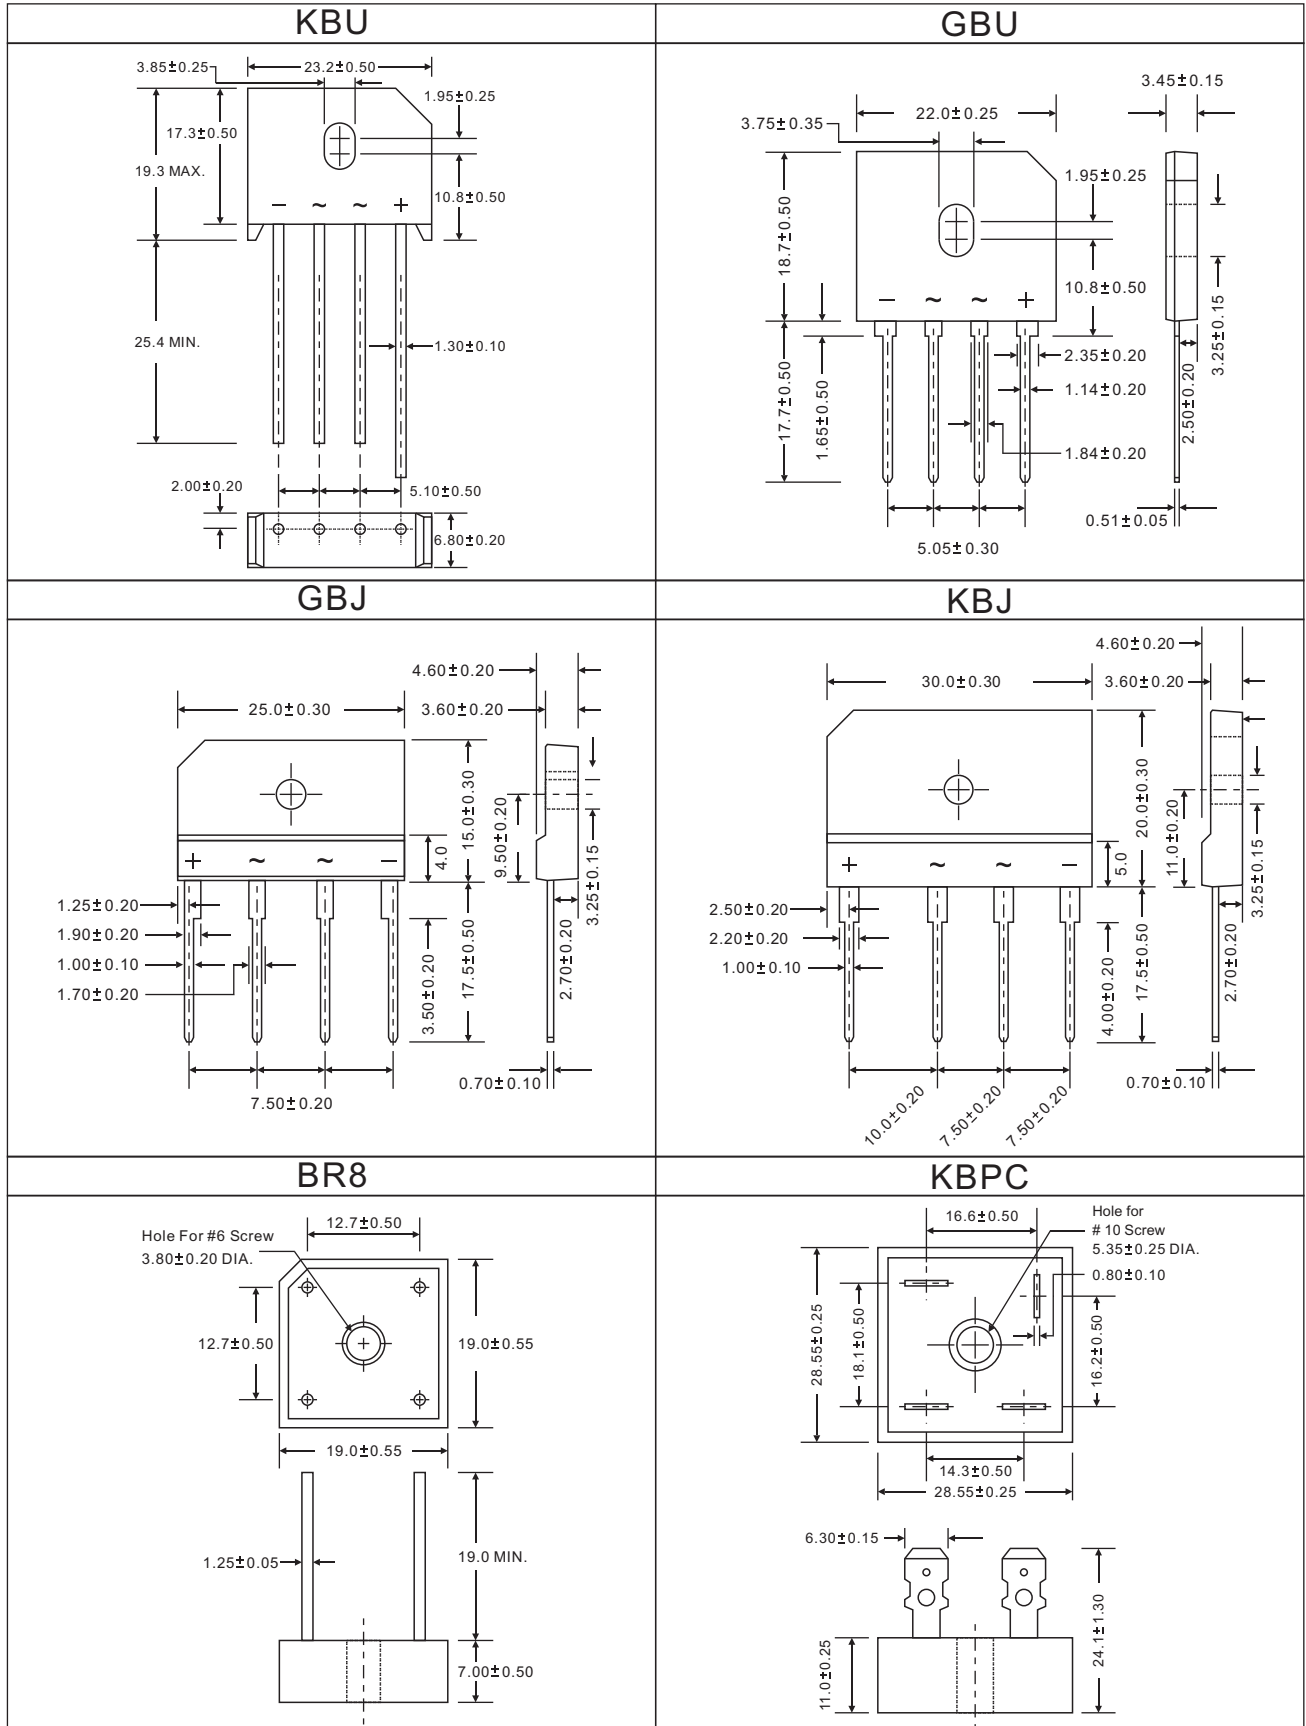
RFE Part Number	Peak Repetitive Reverse Voltage	Max Avg Rectified Current	Max. Peak Fwd Surge Current	Forward Voltage Drop		Max Reverse Current	Outline
	V <sub>RRM</sub>	I <sub>o</sub>	I <sub>FSM</sub>	V <sub>F@I<sub>F</sub></sub>		I <sub>R@V<sub>R</sub></sub>	
	V	A	A	V	A	μA	
<b>10.0 AMP Single-Phase Bridge Rectifiers (Cont'd)</b>							
MP10005	50	10.0	300	1.0	5.0	10	 MP
MP1001	100	10.0	300	1.0	5.0	10	
MP1002	200	10.0	300	1.0	5.0	10	
MP1004	400	10.0	300	1.0	5.0	10	
MP1006	600	10.0	300	1.0	5.0	10	
MP1008	800	10.0	300	1.0	5.0	10	
MP1010	1000	10.0	300	1.0	5.0	10	
MP10005W	50	10.0	300	1.0	5.0	10	 MPW
MP1001W	100	10.0	300	1.0	5.0	10	
MP1002W	200	10.0	300	1.0	5.0	10	
MP1004W	400	10.0	300	1.0	5.0	10	
MP1006W	600	10.0	300	1.0	5.0	10	
MP1008W	800	10.0	300	1.0	5.0	10	
MP1010W	1000	10.0	300	1.0	5.0	10	
MP10005S	50	10.0	300	1.0	5.0	10	 MPS
MP1001S	100	10.0	300	1.0	5.0	10	
MP1002S	200	10.0	300	1.0	5.0	10	
MP1004S	400	10.0	300	1.0	5.0	10	
MP1006S	600	10.0	300	1.0	5.0	10	
MP1008S	800	10.0	300	1.0	5.0	10	
MP1010S	1000	10.0	300	1.0	5.0	10	
<b>15.0 AMP Single-Phase Bridge Rectifiers</b>							
KBU15005	50	15.0	300	1.0	7.5	10	 KBU
KBU1501	100	15.0	300	1.0	7.5	10	
KBU1502	200	15.0	300	1.0	7.5	10	
KBU1504	400	15.0	300	1.0	7.5	10	
KBU1506	600	15.0	300	1.0	7.5	10	
KBU1508	800	15.0	300	1.0	7.5	10	
KBU1510	1000	15.0	300	1.0	7.5	10	
GBU15005	50	15.0	240	1.1	7.5	10	 GBU
GBU1501	100	15.0	240	1.1	7.5	10	
GBU1502	200	15.0	240	1.1	7.5	10	
GBU1504	400	15.0	240	1.1	7.5	10	
GBU1506	600	15.0	240	1.1	7.5	10	
GBU1508	800	15.0	240	1.1	7.5	10	
GBU1510	1000	15.0	240	1.1	7.5	10	
GBJ15005	50	15.0	240	1.1	7.5	10	 GBJ
GBJ1501	100	15.0	240	1.1	7.5	10	
GBJ1502	200	15.0	240	1.1	7.5	10	
GBJ1504	400	15.0	240	1.1	7.5	10	
GBJ1506	600	15.0	240	1.1	7.5	10	
GBJ1508	800	15.0	240	1.1	7.5	10	
GBJ1010	1000	15.0	240	1.1	7.5	10	
KBJ15005	50	15.0	240	1.1	7.5	10	 KBJ
KBJ1501	100	15.0	240	1.1	7.5	10	
KBJ1502	200	15.0	240	1.1	7.5	10	
KBJ1504	400	15.0	240	1.1	7.5	10	
KBJ1506	600	15.0	240	1.1	7.5	10	
KBJ1508	800	15.0	240	1.1	7.5	10	
KBJ1510	1000	15.0	240	1.1	7.5	10	

RFE Part Number	Peak Repetitive Reverse Voltage	Max Avg Rectified Current	Max. Peak Fwd Surge Current	Forward Voltage Drop		Max Reverse Current	Outline	
	V <sub>RRM</sub>	I <sub>O</sub>	I <sub>FSM</sub>	V <sub>F@I<sub>F</sub></sub>	I <sub>R@V<sub>R</sub></sub>			
	V	A	A	V	A	μA		
<b>15.0 AMP Single-Phase Bridge Rectifiers (Cont'd)</b>								
	KBPC15005	50	15.0	300	1.0	7.5	10	<p>KBPC</p>
	KBPC1501	100	15.0	300	1.0	7.5	10	
	KBPC1502	200	15.0	300	1.0	7.5	10	
	KBPC1504	400	15.0	300	1.0	7.5	10	
	KBPC1506	600	15.0	300	1.0	7.5	10	
	KBPC1508	800	15.0	300	1.0	7.5	10	
	KBPC1510	1000	15.0	300	1.0	7.5	10	
	KBPC15005W	50	15.0	300	1.0	7.5	10	<p>KBPCW</p>
	KBPC1501W	100	15.0	300	1.0	7.5	10	
	KBPC1502W	200	15.0	300	1.0	7.5	10	
	KBPC1504W	400	15.0	300	1.0	7.5	10	
	KBPC1506W	600	15.0	300	1.0	7.5	10	
	KBPC1508W	800	15.0	300	1.0	7.5	10	
	KBPC1510W	1000	15.0	300	1.0	7.5	10	
	MP15005	50	15.0	300	1.0	7.5	10	<p>MP</p>
	MP1501	100	15.0	300	1.0	7.5	10	
	MP1502	200	15.0	300	1.0	7.5	10	
	MP1504	400	15.0	300	1.0	7.5	10	
	MP1506	600	15.0	300	1.0	7.5	10	
	MP1508	800	15.0	300	1.0	7.5	10	
	MP1510	1000	15.0	300	1.0	7.5	10	
	MP15005W	50	15.0	300	1.0	7.5	10	<p>MPW</p>
	MP1501W	100	15.0	300	1.0	7.5	10	
	MP1502W	200	15.0	300	1.0	7.5	10	
	MP1504W	400	15.0	300	1.0	7.5	10	
	MP1506W	600	15.0	300	1.0	7.5	10	
	MP1508W	800	15.0	300	1.0	7.5	10	
	MP1510W	1000	15.0	300	1.0	7.5	10	
	MP15005S	50	15.0	300	1.0	7.5	10	<p>MPS</p>
	MP1501S	100	15.0	300	1.0	7.5	10	
	MP1502S	200	15.0	300	1.0	7.5	10	
	MP1504S	400	15.0	300	1.0	7.5	10	
	MP1506S	600	15.0	300	1.0	7.5	10	
	MP1508S	800	15.0	300	1.0	7.5	10	
	MP1510S	1000	15.0	300	1.0	7.5	10	
<b>25.0 AMP Single-Phase Bridge Rectifiers</b>								
	KBU25005	50	25.0	350	1.0	12.5	10	<p>KBU</p>
	KBU2501	100	25.0	350	1.0	12.5	10	
	KBU2502	200	25.0	350	1.0	12.5	10	
	KBU2504	400	25.0	350	1.0	12.5	10	
	KBU2506	600	25.0	350	1.0	12.5	10	
	KBU2508	800	25.0	350	1.0	12.5	10	
	KBU2510	1000	25.0	350	1.0	12.5	10	
	KBJ25005	50	25.0	350	1.1	12.5	10	<p>KBJ</p>
	KBJ2501	100	25.0	350	1.1	12.5	10	
	KBJ2502	200	25.0	350	1.1	12.5	10	
	KBJ2504	400	25.0	350	1.1	12.5	10	
	KBJ2506	600	25.0	350	1.1	12.5	10	
	KBJ2508	800	25.0	350	1.1	12.5	10	
	KBJ2510	1000	25.0	350	1.1	12.5	10	

RFE Part Number	Peak Repetitive Reverse Voltage	Max Avg Rectified Current	Max. Peak Fwd Surge Current	Forward Voltage Drop		Max Reverse Current	Outline	
	V <sub>RRM</sub>	I <sub>O</sub>	I <sub>FSM</sub>	V <sub>F@I<sub>F</sub></sub>		I <sub>R@V<sub>R</sub></sub>		
	V	A	A	V	A	μA		
25.0 AMP Single-Phase Bridge Rectifiers (Cont'd)								
	KBPC25005	50	25.0	400	1.0	12.5	10	<p>KBPC</p>
	KBPC2501	100	25.0	400	1.0	12.5	10	
	KBPC2502	200	25.0	400	1.0	12.5	10	
	KBPC2504	400	25.0	400	1.0	12.5	10	
	KBPC2506	600	25.0	400	1.0	12.5	10	
	KBPC2508	800	25.0	400	1.0	12.5	10	
	KBPC2510	1000	25.0	400	1.0	12.5	10	
	KBPC25005W	50	25.0	400	1.0	12.5	10	<p>KBPCW</p>
	KBPC2501W	100	25.0	400	1.0	12.5	10	
	KBPC2502W	200	25.0	400	1.0	12.5	10	
	KBPC2504W	400	25.0	400	1.0	12.5	10	
	KBPC2506W	600	25.0	400	1.0	12.5	10	
	KBPC2508W	800	25.0	400	1.0	12.5	10	
	KBPC2510W	1000	25.0	400	1.0	12.5	10	
	MP25005	50	25.0	400	1.0	12.5	10	<p>MP</p>
	MP2501	100	25.0	400	1.0	12.5	10	
	MP2502	200	25.0	400	1.0	12.5	10	
	MP2504	400	25.0	400	1.0	12.5	10	
	MP2506	600	25.0	400	1.0	12.5	10	
	MP2508	800	25.0	400	1.0	12.5	10	
	MP2510	1000	25.0	400	1.0	12.5	10	
	MP25005W	50	25.0	400	1.0	12.5	10	<p>MPW</p>
	MP2501W	100	25.0	400	1.0	12.5	10	
	MP2502W	200	25.0	400	1.0	12.5	10	
	MP2504W	400	25.0	400	1.0	12.5	10	
	MP2506W	600	25.0	400	1.0	12.5	10	
	MP2508W	800	25.0	400	1.0	12.5	10	
	MP2510W	1000	25.0	400	1.0	12.5	10	
	MP25005S	50	25.0	400	1.0	12.5	10	<p>MPS</p>
	MP2501S	100	25.0	400	1.0	12.5	10	
	MP2502S	200	25.0	400	1.0	12.5	10	
	MP2504S	400	25.0	400	1.0	12.5	10	
	MP2506S	600	25.0	400	1.0	12.5	10	
	MP2508S	800	25.0	400	1.0	12.5	10	
	MP2510S	1000	25.0	400	1.0	12.5	10	

MECHANICAL DRAWINGS

Dimensions in mm



MECHANICAL DRAWINGS

Dimensions in mm

