

SINGLE-PHASE GLASS PASSIVATED
SILICON BRIDGE RECTIFIER

VOLTAGE RANGE 50 to 1000 Volts CURRENT 8.0 Amperes

FEATURES


- * Low leakage
- * Low forward voltage
- * Mounting position: Any
- * Surge overload rating: 200 amperes peak
- * Ideal for printed circuit boards
- * High forward surge current capability

MECHANICAL DATA

- * UL listed the recognized component directory, file #E94233
- * Epoxy: Device has UL flammability classification 94V-O

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

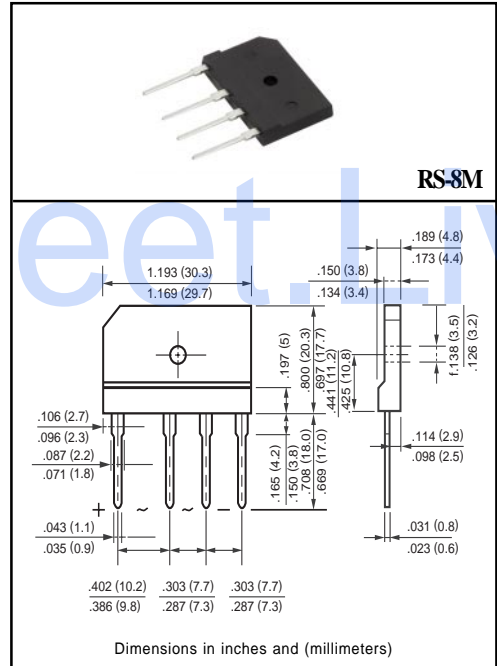

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	RS801M	RS802M	RS803M	RS804M	RS805M	RS806M	RS807M	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current at Tc = 75°C	I _o	8.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	200							Amps
Typical Thermal Resistance (Note 1)	R θ JA	21							°C/W
	R θ JC	2.2							
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150							°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	RS801M	RS802M	RS803M	RS804M	RS805M	RS806M	RS807M	UNITS	
Maximum Forward Voltage Drop per element at 8.0A DC	V _F	1.2								Volts
Maximum Reverse Current at Rated DC Blocking Voltage per element	@ TA = 25°C	5.0								uAmps
	@ TA = 125°C	0.5								mAmps

NOTE:1.Units mounted in free air, no heatsink on P.C.B., 0.5x0.5" (12x12mm) copper pads, 0.375" lead length.

RATING AND CHARACTERISTIC CURVES (RS801M THRU RS807M)

