

BD436, BD438, BD440, BD442

Plastic Medium Power Silicon PNP Transistor

... for amplifier and switching applications. Complementary types are BD437 and BD441.

MAXIMUM RATINGS

Rating	Symbol	Value	Unit	
Collector-Emitter Voltage	BD436 BD438 BD440 BD442	V_{CEO}	32 45 60 80	Vdc
Collector-Base Voltage	BD436 BD438 BD440 BD442	V_{CBO}	32 45 60 80	Vdc
Emitter-Base Voltage		V_{EBO}	5.0	Vdc
Collector Current		I_C	4.0	Adc
Base Current		I_B	1.0	Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C		P_D	36 288	Watts W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range		T_J, T_{stg}	-55 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	3.5	$^\circ\text{C}/\text{W}$



ON Semiconductor®


<http://onsemi.com>

4.0 AMPERES POWER TRANSISTORS PNP SILICON



TO-225AA
Case 77

MARKING DIAGRAM

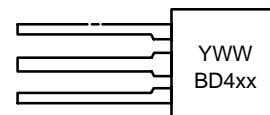

xx = 36, 38, 40, 42
Y = Year
W = Work Week

ORDERING INFORMATION

Device	Package	Shipping
BD436	TO-225AA	500 Box
BD438	TO-225AA	500 Box
BD440	TO-225AA	500 Box
BD442	TO-225AA	500 Box

BD436, BD438, BD440, BD442

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
Collector-Emitter Breakdown Voltage (I _C = 100 mA, I _B = 0)	BD436 BD438 BD440 BD442	V _{(BR)CEO}	32 45 60 80	- - - -	- - - -	Vdc
Collector-Base Breakdown Voltage (I _C = 100 μA, I _B = 0)	BD436 BD438 BD440 BD442	V _{(BR)CBO}	32 45 60 80	- - - -	- - - -	Vdc
Emitter-Base Breakdown Voltage (I _E = 100 μA, I _C = 0)		V _{(BR)EBO}	5.0	-	-	Vdc
Collector Cutoff Current (V _{CB} = 32 V, I _E = 0) (V _{CB} = 45 V, I _E = 0) (V _{CB} = 60 V, I _E = 0) (V _{CB} = 80 V, I _E = 0)	BD436 BD438 BD440 BD442	I _{CBO}	- - - -	- - - -	0.1 0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V _{EB} = 5.0 V)		I _{EBO}	-	-	1.0	mAdc
DC Current Gain (I _C = 10 mA, V _{CE} = 5.0 V)	BD436 BD438 BD440 BD442	h _{FE}	40 30 20 15	- - - -	- - - -	
DC Current Gain (I _C = 500 mA, V _{CE} = 1.0 V)	BD436 BD438 BD440 BD442	h _{FE}	85 85 40 40	- - - -	475 375 475 475	
DC Current Gain (I _C = 2.0 A, V _{CE} = 1.0 V)	BD436 BD438 BD440 BD442	h _{FE}	50 40 25 15	- - - -	- - - -	
Collector Saturation Voltage (I _C = 2.0 A, I _B = 0.2 A) (I _C = 3.0 A, I _B = 0.3 A)	BD436 BD438 BD440 BD442	V _{CE(sat)}	- - - -	- - - -	0.5 0.7 0.8 0.8	Vdc
Base-Emitter On Voltage (I _C = 2.0 A, V _{CE} = 1.0 V)	BD436/BD438 BD440/BD442	V _{BE(ON)}	- -	- -	1.1 1.5	Vdc
Current-Gain - Bandwidth Product (V _{CE} = 1.0 V, I _C = 250 mA, f = 1.0 MHz)		f _T	3.0	-	-	MHz

BD436, BD438, BD440, BD442

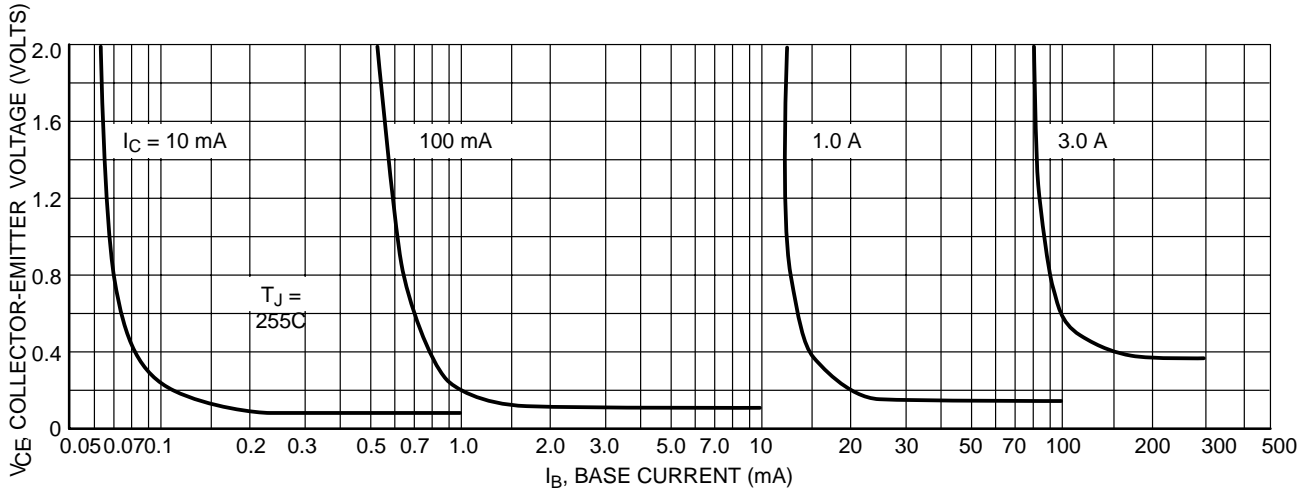


Figure 1. Collector Saturation Region

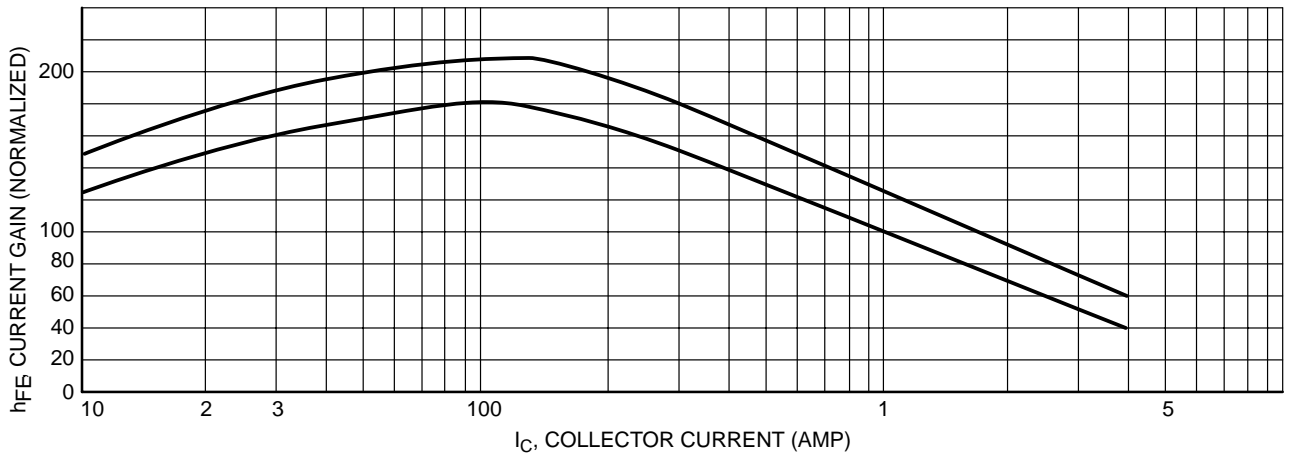


Figure 2. Current Gain

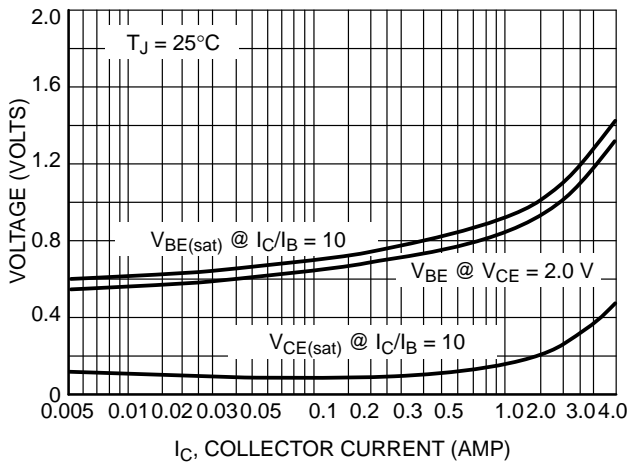


Figure 3. "On" Voltage


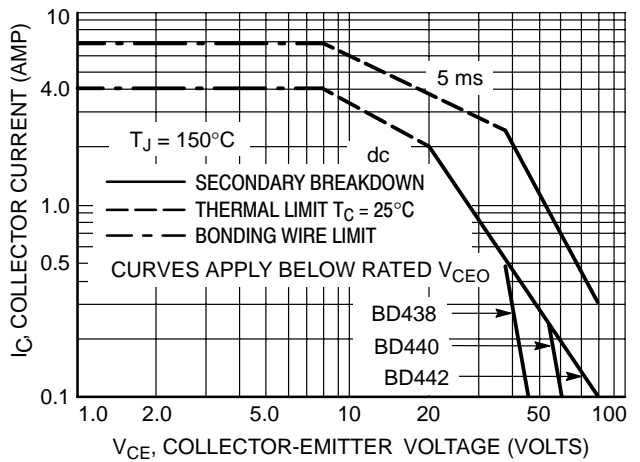


Figure 4. Active Region Safe Operating Area

BD436, BD438, BD440, BD442

PACKAGE DIMENSIONS

TO-225AA CASE 77-09 ISSUE Z

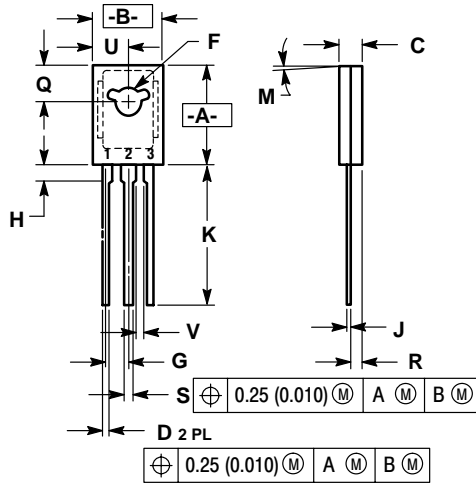


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 077-01 THRU -08 OBSOLETE, NEW STANDARD 077-09.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.425	0.435	10.80	11.04
B	0.295	0.305	7.50	7.74
C	0.095	0.105	2.42	2.66
D	0.020	0.026	0.51	0.66
F	0.115	0.130	2.93	3.30
G	0.094 BSC		2.39 BSC	
H	0.050	0.095	1.27	2.41
J	0.015	0.025	0.39	0.63
K	0.575	0.655	14.61	16.63
M	5° TYP		5° TYP	
Q	0.148	0.158	3.76	4.01
R	0.045	0.065	1.15	1.65
S	0.025	0.035	0.64	0.88
U	0.145	0.155	3.69	3.93
V	0.040	----	1.02	----

STYLE 1:

1. EMITTER
2. COLLECTOR
3. BASE

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

Literature Fulfillment:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850
Email: r14525@onsemi.com

ON Semiconductor Website: <http://onsemi.com>

For additional information, please contact your local Sales Representative.