



1N4001SG THRU 1N4007SG

1.0 AMP. Glass Passivated Rectifiers



Voltage Range
50 to 1000 Volts
Current
1.0 Ampere


Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ Ø 0.6mm leads

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 250°C/10 seconds/.375"(.95mm) lead lengths at 5 lbs.(2.3kg) tension
- ✧ Weight: 0.22 gram

A-405

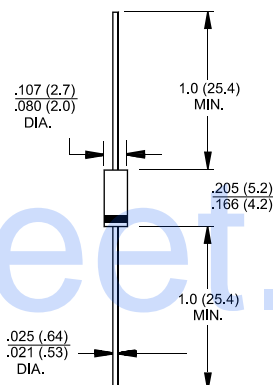

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	1N 4001SG	1N 4002SG	1N 4003SG	1N 4004SG	1N 4005SG	1N 4006SG	1N 4007SG	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length @ T _A = 50°C	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	1.1	1.0					V	
Maximum DC Reverse Current @ T _A =25°C at Rated DC Blocking Voltage @ T _A =125°C	5.0 100							uA uA
Typical Junction Capacitance (Note)	15							pF
Operating and Storage Temperature Range T _J , T _{STG}	- 65 to + 150							°C

Note: Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

RATINGS AND CHARACTERISTIC CURVES (1N4001SG THRU 1N4007SG)

FIG.1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

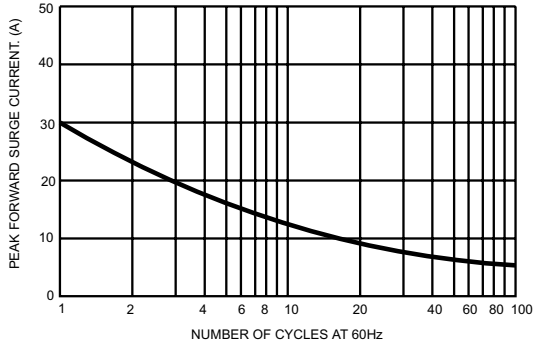


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

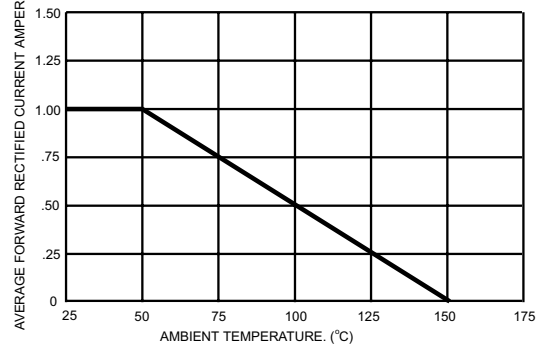


FIG.3- TYPICAL JUNCTION CAPACITANCE

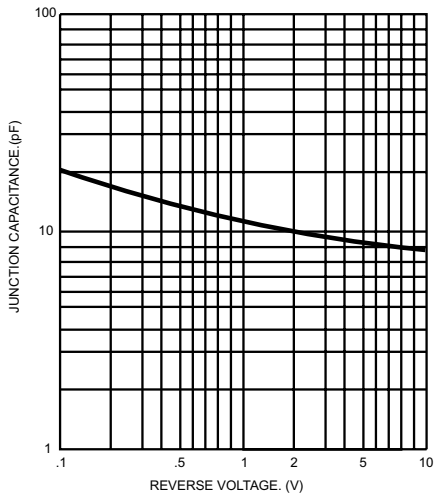


FIG.4- TYPICAL FORWARD CHARACTERISTICS

