

Insulated Precision Wirewound Resistors Axial Leads



In wirewound precision resistors, the RLP series holds a leading position in professional applications whenever an excellent stability of the ohmic value and a correspondingly low temperature coefficient are required at the same time.

The RLP model resistors comply with the most stringent requirements of the CECC 40-201-006 specification. The series consists of 5 models covering the power range from 1 W to 10 W.

Non-inductive versions can be supplied on request by specifying RLP-NI. For higher power dissipations, the use of RH series resistors is recommended.

FEATURES

- 1 W to 10 W at 25 °C
- Approved according to CECC 40-201-006
- According to MIL-R-26/5C and MIL-R-26/6C
- Excellent stability $\pm 0.3\%$ after 1000 h
- High power up to 10 W at 25 °C
- Low ohmic values 10 m Ω available
- Low temperature coefficient ± 50 ppm/°C
- Electrical insulation
- Climatic protection
- Termination = Pure matte tin or Sn/Ag/Cu according to the ohmic value
- Compliant to RoHS directive 2002/95/EC


RoHS
COMPLIANT

DIMENSIONS in millimeters

 INSULATED 25 min. A 25 min. $\varnothing E$ $\varnothing B$ $\varnothing a \pm 0.02$ 45° chamfer max. 0.25 mm deep 4 4 L max. RLP1 - RLP2 a = 1 mm RLP3 - 6 - 10 a = 1.2 mm	SERIES AND STYLE	A max.	$\varnothing B$ max.		E ± 0.1	WEIGHT g
			R > 0.15 Ω	R \leq 0.15 Ω		
	RLP1	7	2.5	-	0.6	0.27
	RLP2	10.2	4.0	6	0.6	0.48
	RLP3	14	5.54	9	0.8	1.3
	RLP6	23.82	8.71	11	0.8	3.4
	RLP10	46.78	10.32	180K	0.8	8.6

TECHNICAL SPECIFICATIONS

VISHAY SFERNICE SERIES AND STYLE			RLP1	RLP2	RLP3	RLP6	RLP10
Reference CECC 40-201-006			A	B	C	D	E
Cross-Reference NF C 93-210			RP8	RP7	RP4	RP5	RP6
Cross-Reference MIL-R-26/5C and MIL-R-26/6C			RW80	RW81	RW79	RW74	RW78
Power Rating, P_r	CECC 40-201-006 Power	At 25 °C, P_{25} At 70 °C, P_{70}	1 W 0.8 W	1.5 W 1.25 W	2.5 W 2 W	-	-
	Extended Sfernice Power	At 25 °C, P_{25} At 70 °C, P_{70}	1 W 0.8 W	2 W 1.65 W	3 W 2.5 W	6 W 5 W	10 W 8.2 W
Ohmic Range in Relation to Tolerance		$\pm 5\%$ E24	0.05 Ω to 2 k Ω	0.025 Ω to 6.8 k Ω	0.01 Ω to 15 k Ω	0.02 Ω to 59 k Ω	0.06 Ω to 150 k Ω
		$\pm 2\%$ E48	0.05 Ω to 2 k Ω	0.025 Ω to 6.8 k Ω	0.03 Ω to 15 k Ω	0.02 Ω to 59 k Ω	0.06 Ω to 150 k Ω
		$\pm 1\%$ E96	0.05 Ω to 2 k Ω	0.025 Ω to 6.8 k Ω	0.03 Ω to 15 k Ω	0.02 Ω to 59 k Ω	0.06 Ω to 150 k Ω
		$\pm 0.5\%$ E96	0.4 Ω to 2 k Ω	0.4 Ω to 6.8 k Ω	0.0499 Ω to 15 k Ω	0.3 Ω to 59 k Ω	0.3 Ω to 150 k Ω
		$\pm 0.1\%$ E96	Please consult Vishay Sfernice				
Qualified Ohmic Value Range CECC 40-201-006			1 Ω to 470 Ω	0.2 Ω to 1.78 k Ω	0.1 Ω to 3.57 k Ω	0.1 Ω to 12.1 k Ω	0.1 Ω to 40.2 k Ω
Limiting Element Voltage, U_{max} . AC/DC			50 V	120 V	200 V	300 V	720 V
Critical Resistance			Out of nominal ohmic range			17 800 Ω	51 100 Ω

Note

- Undergoes European Quality Insurance System (CECC)



MECHANICAL SPECIFICATIONS		
Series and Style	RLP1, RLP2	RLP3, RLP6, RLP10
Encapsulant	High temperature mold compound	High temperature silicone coating
Resistive Element	CuNi or NiCr	
Ceramic Substrate	Alumina or steatite	
Termination	Pure matte tin or Sn/Ag/Cu	

ENVIRONMENTAL SPECIFICATIONS	
Temperature Range	- 55 °C to 275 °C
Climatic Category (LCT/UCT/days)	55/200/56

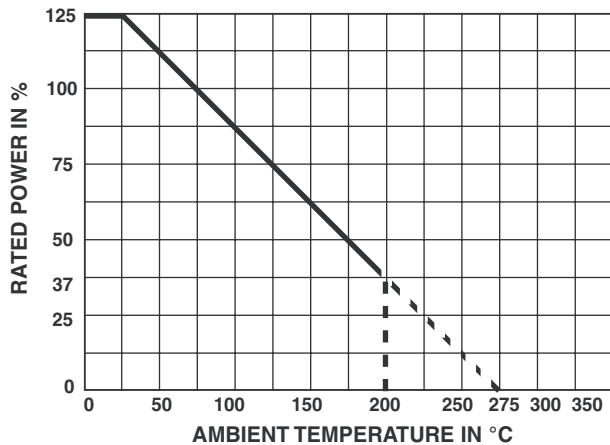
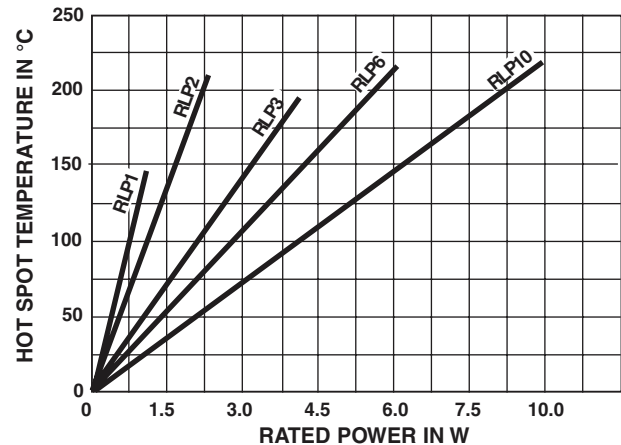
PERFORMANCE		
TESTS	CONDITIONS	REQUIREMENTS (ΔR/R OR INDICATED PARAMETER) CECC 40-201-006
Short Time Overload	IEC 60115-1 6.25 P_r Extended Sfernice Power or $U = 2 U_{max}/5$ s for RLP1, RLP2, RLP3 12 P_r Extended Sfernice Power or $U = 2 U_{max}/5$ s for RLP6, RLP10	± (0.25 % + 0.05 Ω)
Load Life	IEC 60115-1 90'/30' CYCLES 1000 h P_r Extended Sfernice Power + 25 °C	± (0.5 % + 0.05 Ω) Insulation R ≥ 1 GΩ
Dielectric w/s Voltage	IEC 60115-1 $U_{RMS} = 500$ V/60 s for RLP1, RLP2, RLP3 $U_{RMS} = 1000$ V/60 s for RLP6, RLP10	No flashover or breakdown Leakage current < 10 μA
Rapid Change of Temperature	IEC 60115-1 IEC 60068-2-14 Test Na 5 cycles (30' at LCT/30' at UCT) - 55 °C/+ 200 °C	± (0.25 % + 0.05 Ω)
Climatic Sequence	IEC 60115-1 - 55 °C/+ 200 °C/56 days	± (0.5 % + 0.05 Ω)
Humidity (Steady State)	IEC 60115-1 IEC 60068-2-3 Test Ca 95 % HR/40 °C 56 days	± (0.5 % + 0.05 Ω) Insulation R ≥ 100 MΩ
Shock	IEC 60115-1 IEC 60068-2-27 Test Ea 50 g's/half sine/ 3 times by direction (i.e. 18 shocks)	± (0.25 % + 0.05 Ω)
Vibration	IEC 60115-1 IEC 60068-2-6 Test Fc 10 Hz/55 Hz	± (0.25 % + 0.05 Ω)
Load Life at Upper Category Temperature	IEC 60115-1 90'/30' cycles 1000 h P_r Extended Sfernice Power + 200 °C	± (0.5 % + 0.05 Ω) Insulation R ≥ 1 GΩ

TEMPERATURE COEFFICIENT IN THE RANGE - 55 °C TO + 200 °C	
OHMIC RANGE	REQUIREMENT CECC 40-201-006
< 1 Ω	± 100 ppm/°C
1 Ω to < 10 Ω	± 50 ppm/°C
≥ 10 Ω	± 25 ppm/°C

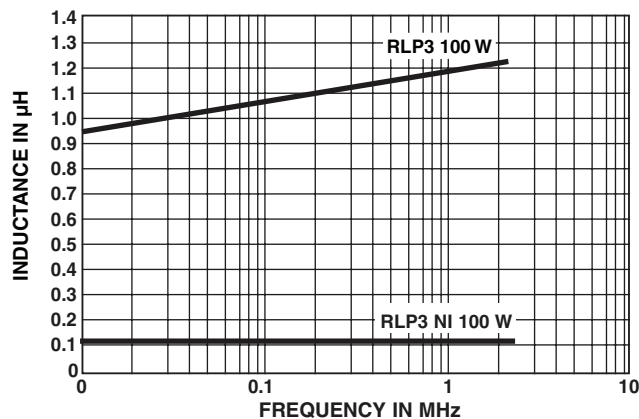
STABILITY AND POWER RATING

Stability changes slightly according to power rating and ambient temperature. This fact is especially important for users needing a life drift lower than the initial resistance tolerance. Typical drifts, after 2000 h life test made under the 90°/30° conditions and at an ambient temperature of 25 °C, are:

OHMIC RANGE	RLP1	RLP2	RLP3	RLP6	RLP10	$\Delta R \% / R \%$
P_n	1 W	2 W	3 W	5 W	10 W	0.3
$0.5 P_n$	0.5 W	1 W	1.5 W	2.5 W	5 W	0.15

POWER RATING

TEMPERATURE RISE

NON INDUCTIVE WINDING (NI)

Non inductive (Ayrton Perry) winding available. Please consult Vishay Sfernice.

INDUCTANCE (Example)

PACKAGING (see datasheet 50032 and 50033)

- Reel of 1000 units for RLP1, RLP2, RLP3
- Ammopack of 500 units for RLP1, RLP2, RLP3
- Bag of 100 units for RLP1, RLP2
- Blister of 20 units for RLP3
- Box of 50 units for RLP6, RLP10

MARKING

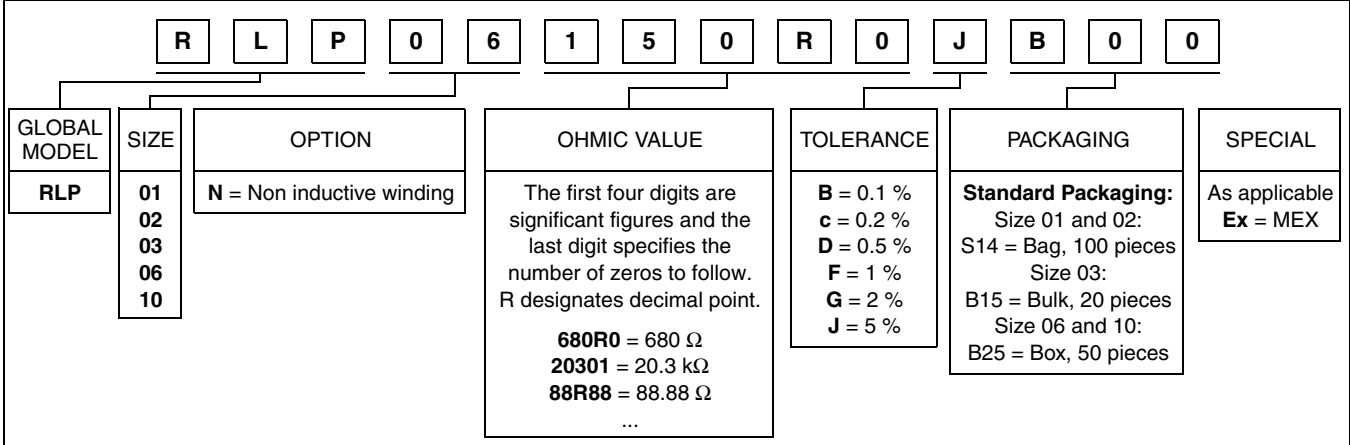
Vishay Sfernice trademark, series, style, CECC style (if applicable) nominal resistance (in Ω , k Ω), tolerance (in %), manufacturing date.



ORDERING INFORMATION

RLP	01	5R500	J	R15
MODEL	STYLE	OHMIC VALUE	TOLERANCE	PACKAGING

GLOBAL PART NUMBER INFORMATION





Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.